MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, RECTANGULAR, RACK AND PANEL, POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE, CRIMP TYPE REMOVABLE PIN CONTACTS, SIZE 16

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28748.

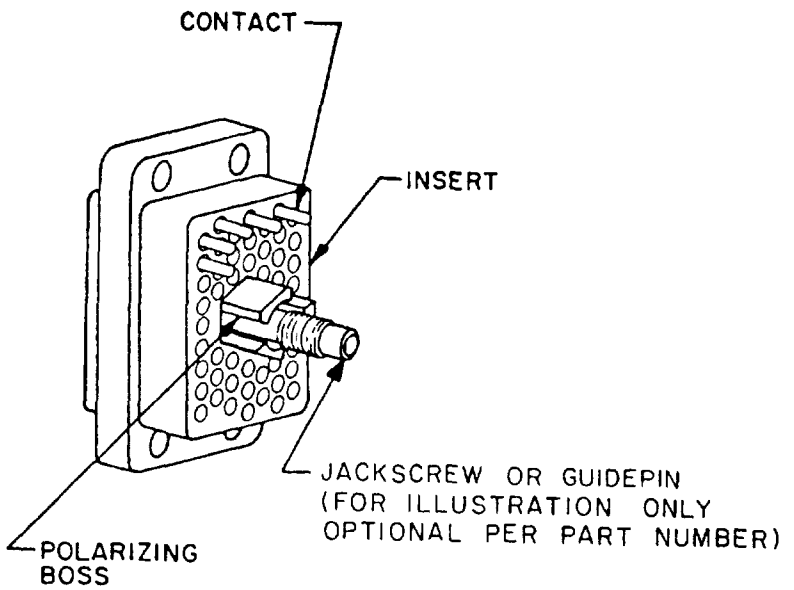


FIGURE 1. Connector.

(E) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See applicable listed MS sheets for insert and contacts.

Service tooling: See applicable listed MS sheets for servicing tools.

Mating connectors MIL-C-28748/10.

Part number: As shown in the following example:

EXAMPLE OF PART NUMBER:

(See part number code)

M 28748/09	A	0	A	L	14
Basic number of specification sheet	Insert	Shield and shield clamp location or retaining plate	Shell type	Jackscrews or guidepins	Contacts

PART NUMBER CODE

Insert with thru mounting hole	Number of contacts
A - MS18155	10
B - MS18157	20
C - MS18159	36
D - MS18161	52
E - MS18163	80
F - MS17778	104
G - MS18165	158
H - MS18167	212

Insert with mounting sleeve	Number of contacts
J - MS18155	10
K - MS18157	20
L - MS18159	36
M - MS18161	52
N - MS18163	80
P - MS17778	104
R - MS18165	158
S - MS18167	212

Shield and shield clamp location or retaining plate

0 - None included

Shell type (polarization) (see note)	See applicable insert MS part number
A - 1 N	
B - 1 V	
C - 1 W	
D - 1 X	
E - 1 Y	
F - 1 Z	
N - 2 N	
V - 2 V	
W - 2 W	
X - 2 X	
Y - 2 Y	
Z - 2 Z	
G - 3 N	
H - 3 V	
J - 3 W	
K - 3 X	
L - 3 Y	
M - 3 Z	
P - 4 N	
Q - 4 V	
R - 4 W	
S - 4 X	
T - 4 Y	
U - 4 Z	

Jackscrews or guidepins

L - Long jackscrew from applicable insert MS.
G - Guidepin from applicable MS.
0 - Boss for jackscrew.
B - Boss for guidepin.

NOTE Shell type polarization positions A through F are for use with jackscrews, N through Z are for use with the boss for jackscrews, G through M are for use with guidepins, and P through U are for use with the boss for guidepins.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:16Z
Check the source to verify that this is the current version before use.

TABLE I. Contact size percent.

Contact	Size 16-16 M39029/36-278 1/ (percent)	Size 16-20 M39029/36-277 1/ (percent)	Size 20-20 shielded M39029/79-436 2/ M39029/79-437 2/ (percent)
1A	100	0	0
1B	90	0	10
1C	80	0	20
1D	70	0	30
1E	60	0	40
1F	50	0	50
1G	40	0	60
1H	30	0	70
1J	20	0	80
1K	10	0	90
1L	0	0	100
(E) 1Z	0	0	0
2A	0	100	0
2B	0	90	10
2C	0	80	20
2D	0	70	30
2E	0	60	40
2F	0	50	50
2G	0	40	60
2H	0	30	70
2J	0	20	80
2K	0	10	90

1/ Basic crimp tool. M22520/1-01.
Positioner. M22520/1-03(A).
Installing tool M81969/18-01.
Removal tool· M81969/20-01.

2/ Basic crimp tool TMDC16CX4 (Hughes).
Installing tool M81969/17-04.
Removal tool M81969/19-08.

Custodians.
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, MI
Navy - AS, OS, SH
Air Force - 11, 99
DLA - ES

User activities
Army - AV, ME
Navy - MC

Preparing activity:
Navy - EC

Agent
DLA - ES

(Project 5935-3572-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:16Z
Check the source to verify that this is the current version before use.