[INCH-POUND]
A-A-3106
March 10, 1997
SUPERSEDES
H-B-651J
June 11, 1990

COMMERCIAL ITEM DESCRIPTION

BRUSHES, FLOOR SWEEPING

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE. This commercial item description (CID) covers floor sweeping brushes, with natural and synthetic filler set in wood or plastic blocks, without handles.

2. CLASSIFICATION. The floor brushes shall be the following classes and sizes:

Class 1 - Fine natural fiber or fine polyester filament.
Class 2 - Medium mixture of filaments.
Class 3 - Medium polypropylene filaments.
Class 4 - Heavy duty polypropylene filaments.

Size 14 - 14 inches
Size 18 - 18 inches
Size 24 - 24 inches
Size 30 - 30 inches
Size 36 - 36 inches

3. SALIENT CHARACTERISTICS

3.1 Block. The block shall be wood or plastic at the manufacturer's option. Wood blocks shall be fine textured, close and straight grained hardwood and shall have least one coat of clear protective finish. Plastic blocks shall be general purpose impact resistant plastic molding material commercially used for floor brushes. The block shall have rounded or beveled edges and ends. The block may be one or two piece construction. The two piece block shall be used only for wire drawn brushes. The two piece block shall be fastened together with rivets, or bolts using lock washers and nuts or washers and locknuts. Two ACME threaded holes shall be provided for handles in the top of each block, centered longitudinally. The holes shall be drilled at an angle of 45° ±10° from the vertical through the block, or to a minimum depth of 1-1/16 inch (2.70 cm). Each hole shall be threaded with an ACME thread having 5 threads per inch (2.5 cm). The holes and threads shall be of such dimensions so as to enable a handle with threads as specified by CID A-A-3082 Type I, to be attached.

3.2 Wire. Drawing or staple wire used shall be wire normally used for floor brushes.

3.3 Filler. The brush filler shall be as specified. The weight of the trimmed filler material in each brush shall be as specified in Table I, and shall be the filler as removed from the end item. The synthetic filaments shall be feathered at the ends.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Branch (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

3.3.1. Class 1. The class 1 brushes shall be made from fine natural fiber or fine polyester filament at the option of the contractor. The fine natural fiber shall be either 100 percent horsetail hair or a 50/50 (±5%) mixture of horsetail hair and a vegetable fiber such as cocoa fiber, at the manufacturers option. Horsetail hair used shall be extra stiff, natural horsetail hair, cleaned and sterilized.

3.3.2 Class 2. The class 2 brushes shall be made from a 50/50 (±5%) mixture of fine natural fiber, or fine polyester filament, and tampico fiber or medium polypropylene filament. Fine polyester filament shall be a level or crimped polyester filament with a round cross-section and an average diameter of 0.0140 ±0.0005 inch (0.36 ±0.01 mm). Medium polypropylene filament shall be a level or crimped polypropylene filament with a round cross-section and an average diameter of 0.0140 ±0.0005 inch (0.36 ±0.01 mm). Tampico fiber shall be of natural or black dyed color. The color of the synthetic filler shall be the manufacturer's option.

3.3.3 Class 3. The class 3 brushes shall be made from medium polypropylene filament. Medium polypropylene filament shall be a level or crimped polypropylene filament with a round cross-section and an average diameter of 0.0140 ±0.0005 inch (0.36 ±0.01 mm). The color shall be the manufacturer's option.

3.3.4 Class 4. The heavy duty class 4 brushes shall be made from polypropylene filament. The polypropylene filament shall be a level or crimped 50/50 (±5%) mixture of two diameters. The cross-section of both sizes shall be a heavy X, the average diameter of the smaller filament shall be 0.0180 ±0.0005 inch (0.46 ±0.01 mm), the average diameter of the larger filament shall be 0.0280 ±0.0005 inch (0.71 ±0.01 mm). The color shall be the manufacturer's option.

3.4 Construction. The construction of the brushes shall conform to the requirements specified in Table I and shall appear similar to figure 1. The brushes shall be either staple set or wire drawn. The tufts shall not loosen, break, or pull out of the brush when pulled by hand.

Table I, Physical requirements.

Characteristic	Requirement				
	Brush size				
	14	18	24	30	36
Block					
Length, inches (cm), min.	13-3/4 (35)	17-3/4 (45)	23-3/4 (60)	29-3/4 (76)	35-3/4 (90)
Width, inches (cm), min.	------- 2-7/16 (6.19) for all sizes -------				
Thickness					
Wood, inch (cm), min.	------- 15/16 (2.38) for all sizes -------				
Plastic, inch (cm), min.	------- 7/8 (2.22) for all sizes -------				
Tuft holes					
Number	162	203	228	346	416
Depth, Class 1-3, inch (cm) min.	------- 5/16 (0.79) for all sizes -------				
Depth, Class 4, inch (cm) min.	------- 7/16 (1.11) for all sizes -------				
Filament					
Length clear of block, inches (cm), min.	-------- 3 (7.6) for all sizes -------				
Weight per brush, ounces (g), min.					
Classes 1 - 3	7-19/32 (215)	9-3/4 (276)	--	16-9/32 (461)	19 (539)
Class 4	--	10-9/16 (299)	13-13/16 (391)	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

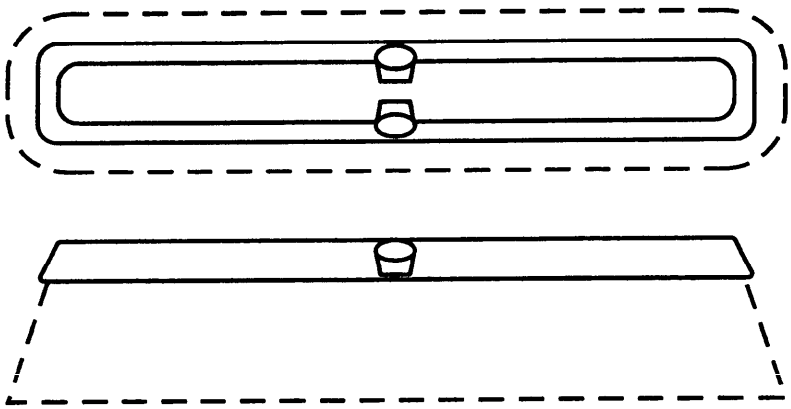


Figure 1

3.5 Trim. The finished brush filler material shall be evenly and uniformly trimmed to conform to the dimensional requirements of the finished brushes.

3.6 Brace. The size 30 and 36 brushes shall be provided with a brace to support the handle. The brace design shall be at the manufacturer's option, shall allow use of either hole in the block, shall be usable with any handle that can be used with the brush, shall be received complete and ready for assembly without any modification necessary, and shall be initially assembled and allow movement or replacement of the handle with basic hand tools only. The brace shall extend diagonally from the each end of the block to the handle as depicted in figure 2. The brace shall extend from points a minimum of 8 inches (20 cm) from the handle centerline towards each end, to a minimum of 8 inches (20 cm) up the handle from the block.

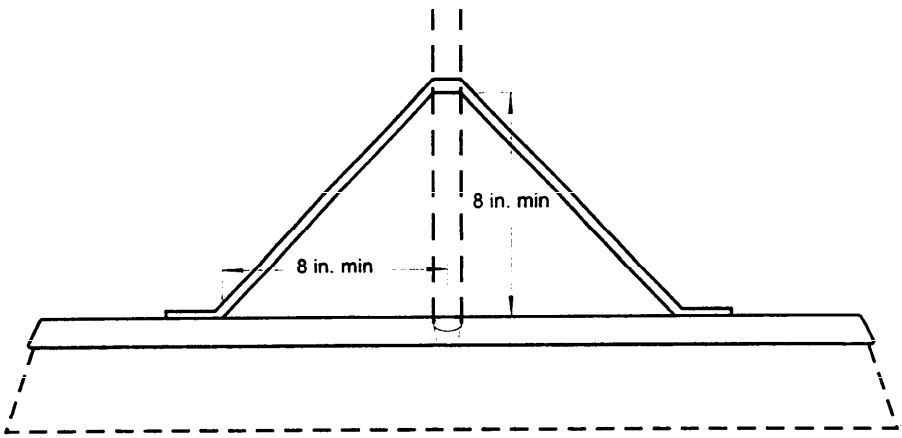


Figure 2

3.7 Marking. Each block shall be clearly and permanently marked with the manufacturer's name or recognized trademark.

3.8 Workmanship. The brushes shall be free from defects which may affect their serviceability, durability or appearance. All surfaces shall be neatly constructed and finished and shall have no sharp edges. Wood blocks shall be free of splinters and of torn or loose grain. Plastic blocks shall be free from voids or channels. The filler material shall be free from foreign matter.

3.9 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING, PACKING AND MARKING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Ordering data. Purchasers should select the preferred options permitted here and include this information in procurement documents:

(a) Title, number, and date of this CID.
(b) Class and size.
(c) Packaging, packing, and markings required.


7.2 Referenced Document.

Commercial Item Description

A-A-3082 - Handles, Wood, Threaded and Tapered

Commercial Item Descriptions are available from the General Services Administration, Federal Supply Service Bureau, Specification Section, Suite 800, 470 East L'Enfant Plaza SW, Washington, DC 20407.

7.3 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

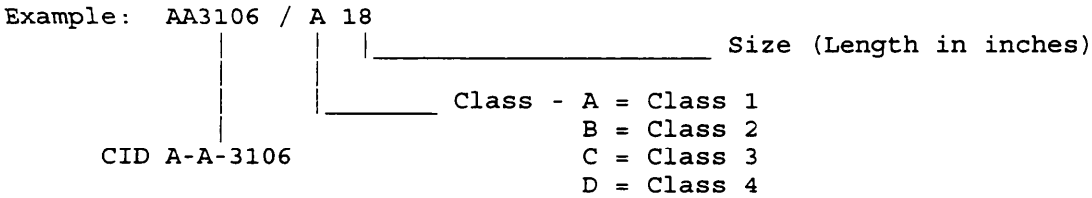

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

7.4 Referencing NSN's. The following NSN's reference this document (this may not be a complete list):

NSN	Class	Size	PN
7920-00-243-3407	1	18	AA3106/A18
7920-00-292-2363	1	30	AA3106/A30
7920-00-292-2365	2	14	AA3106/B14
7920-00-292-2367	2	18	AA3106/B18
7920-00-264-4638	2	30	AA3106/B30
7920-00-292-2362	2	36	AA3106/B36
7920-00-965-4887	2	18	AA3106/B18
7920-00-965-4886	3	18	AA3106/C18
7920-00-292-2359	4	18	AA3106/D18
7920-00-292-2360	4	24	AA3106/D24

7.5 Handles. These brushes do not include handles. The handle intended to be used with these brushes is NSN 7920-00-263-0328.

Preparing Activity:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.