INCH-POUND

A-A-52136
December 8, 1993

# COMMERCIAL ITEM DESCRIPTION

## KETTLES, STEAM JACKETED (STAINLESS STEEL, STEAM HEATED)

The General Services Administration has authorized the use of this Commercial Item Description in preference to RR-K-195.

## 1. ABSTRACT

1.1 Abstract. This commercial item description covers stainless steel, steam-jacketed, steam heated kettles in the following types, styles, capacities, and classes:

Type I - Deep, 2/3 jacketed

| | | |
|---|---|---|
| Style 1 | - | Leg mounted, stationary |
| Capacities | - | 10, 20, 30, 40, 60, 80, and 100 gallons |
| Style 2 | - | Wall mounted, stationary |
| Capacities | - | 10, 20, 30, 40, 60, 80, and 100 gallons |
| Style 3 | - | Pedestal mounted, stationary |
| Capacities | - | 10, 20, 30, 40, 60, 80, and 100 gallons |
| Style 4 | - | Pedestal mounted, tilting |
| Capacities | - | 10, 20, 30, 40, 60, and 80 gallons |
| Style 5 | - | Table mounted, tilting |
| Capacities | - | 2-1/2, 5, and two-5 gallon, 7-1/2, and 10 gallons |
| Style 8 | - | Wall mounted, tilting |
| Capacities | - | 10, 20, 30, 40, 60, and 80 gallons |
| Style 9 | - | Leg mounted, tilting |
| Capacities | - | 10, 20, 30, 40, 60, 80, and 100 gallons |

Type II - Shallow, fully jacketed

| | | |
|---|---|---|
| Style 1 | - | Leg mounted, stationary |
| Capacities | - | 20, 25, 40, 60, and 80 gallons |


Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

Style 2 - Pedestal mounted, stationary
Capacities - 20, 25, 40, 60, and 80 gallons
Style 3 - Wall mounted, tilting
Capacities - 20, 25, 40, and 60 gallons
Style 4 - Wall mounted, stationary
Capacities - 20, 25, 40, and 60 gallons

Class A - Insulated (not applicable to type I, style 5)
Class B - Noninsulated

1.2 CID based part identification number (PIN). A document based PIN to identify type, style, capacity/size, and class of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

2. SALIENT CHARACTERISTICS

2.1 Design and construction. Kettles shall be fabricated of 300 series stainless steel and shall consist of an inner body with a steam jacket on the outside. The kettles shall be constructed in accordance with the appropriate ASME codes and shall be operated by direct steam at pressures ranging from 35 to 50 pounds per square inch (psi) depending on kettle size. The completely assembled units shall be provided with all piping, inlet and outlet valves, controls, and gauges for connection to steam supplies. Globe and check valves shall be appropriate for working pressures up to 125 pounds per square inch guage (psig). The kettles shall be provided with a draw-off located at the bottom of the kettle body to allow for complete drainage. Class A kettles shall be fabricated with insulation contained between the kettle body and the outer casing. The kettles shall be provided with safety valves designed for the maximum operating pressures. Table mounted kettles shall be provided with a stainless steel basket. Unless otherwise specified, a swing spout water supply connection with faucet shall be provided. When specified, an electric or mechanical water metering device shall be furnished (see 5.2). Unless otherwise specified, a graduated stainless steel measuring stick shall be furnished, except for type I, style 5 kettles.

2.1.1 Tilting kettles. When specified, tilting kettles shall be equipped with a cover with handle and shall be of the lift-off type (see 5.2). When specified, actuators and counter-balancing springs shall be provided (see 5.2). Steam inlets and outlets shall be through hollow stainless steel trunnions. An operating handle with a heat-proof knob shall be mounted on the side of each kettle.

2.1.2 Non-tilting kettles. Non-tilting kettles shall be equipped with covers and handles. A tangent draw-off assembly equipped with an outlet strainer, a strainer hook, and draw-off valve shall be provided and located at the lowest point inside the kettle body.



Source: https://assist.dla.mil -- Downloaded: 202640-26T09:07Z
Check the source to verify that this is the current version before use.

2.1.3 Kettle mountings.

2.1.3.1 Leg mounted. Leg mounted kettles shall be constructed with a minimum of three stainless steel tubular legs with stainless steel floor flanges and shall be a minimum of 1-1/4 inch iron pipe size (IPS). Legs shall be threaded into sockets located on the outside kettle bottom. When specified legs shall be braced (see 5.2).

2.1.3.2 Wall mounted. Wall mounted kettles shall be furnished with a wall-bracket or an in-wall carrier support. Wall brackets and in-wall carrier supports shall be capable of supporting the weight of the kettle plus a load of 2-1/2 times the weight it is intended to hold. Bracket frames shall have provisions for securing valves, fittings, piping, and openings for controls. Frames shall have at least three bolt holes.

2.1.3.3 Pedestal mounted. Pedestals shall be of the manufacturer's standard design and shall be provided with a base with a minimum of four equally spaced bolt holes. Pedestals for tilting tables shall be provided with trunnions for tilting. Tilting shall be controlled by a hand wheel or crank.

2.1.3.4 Table mounted (tilting). Table mounted tilting kettles shall be provided with two vertical supports and trunnions which will allow the kettle to be tilted 90° from the normal position. A handle shall be attached to the kettle body.

2.2 Standard compliance. The kettles shall comply with the requirements of NSF International Standard No. 4 and ASME sections IV and VIII (see 3.2).

2.3 Users instructions ("Government unique" requirement). Operating instructions shall be on an aluminum, brass, or stainless steel plate permanently affixed to the item. Marking shall be stamped, embossed, engraved or applied by photosensitive means. The plate shall contain the information listed below. The words "STEAM-JACKETED KETTLE" shall be not less than 3/16 inch high and the words "USER'S INSTRUCTIONS" shall be not less than 1/8 inch high. All other characters shall be not less than 3/32 inch high. The plate shall be mounted so as to be visible to the operator.

STEAM-JACKETED KETTLE

USER'S INSTRUCTIONS

1. Caution: Steam supply shall not exceed 50 psig.

2. Do not tamper with or obstruct safety valve.

3. Do not clean with abrasive materials.



Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

4. Wash and sanitize kettle before and after each use with hot soapy water and rinse thoroughly with clean hot water. Sanitize all food contact surfaces either by rinsing, spraying, or swabbing the kettle with a solution of 100 parts per million (ppm) available chlorine or 25 ppm available iodine.

5. Leave cover and drain open when not in use.

6. Do not turn steam on unless water or food is in the kettle.

7. Do not put water in hot dry kettle.

8. When heating a cold kettle, turn the steam on gradually, thus allowing the kettle to become warm before full pressure is applied. After kettle becomes warm, and before applying full pressure, open the safety valve momentarily to release any air trapped within the jacket.

*9. Clean strainer, draw-off valve, and draw-off tube thoroughly after each use. To clean draw-off valve and tube, remove the front end of the valve and brush-scrub with hot water.

*NOTE: Not applicable to tilting kettles.

2.4 Data nameplate ("Government unique" requirement). The kettles shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the kettle by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number (see 5.2)

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the kettle.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

2.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.6 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.7 Workmanship. The finished kettle shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

## 3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the kettle conforms to the applicable requirements of NSF International Standard No. 4 and ASME sections IV and VIII.

3.2.1 NSF International. Acceptable evidence of meeting the requirements of NSF International Standard No. 4 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

3.2.2 American Society of Mechanical Engineers (ASME). Acceptable evidence of meeting the requirements of ASME sections IV and VIII shall be the ASME mark, or a certified test report from a recognized indented laboratory acceptable to the Government indicating compliance with the applicable requirements of sections IV and VIII.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export, as specified (see 5.2).

4.2 Commercial packaging and packing. Each kettle shall be cleaned, preserved, packaged, and packed in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. Each kettle shall be disassembled to the extent determined by the manufacturer to protect parts susceptible to damage during shipment and storage and for the reduction of cubage. Disassembly shall be such that special skills or special tools, other than those furnished, are not required to place the kettle in operation. Disassembled parts shall be identified. The kettle and disassembled parts shall be preserved and cushioned to provide adequate protection against corrosion, deterioration, and damage during shipping and storage. Disassembled and detached parts shall be packaged in a snug-fitting fiberboard box conforming to PPP-B-636.

4.3.2 Export packing.

4.3.2.1 Kettles weighing 65 pounds or less. Each kettle (together with detached components) weighing 65 pounds or less shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, class domestic of PPP-B-636. Suitable means shall be used to immobilize the contents.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

4.3.2.2 Kettles weighing more than 65 pounds. Each kettle (together with detached components) weighing more than 65 pounds, shall be packed in a shipping container conforming to domestic type, style A or B of PPP-B-601. Each kettle shall be securely bolted to the bottom of the shipping container with carriage bolts passing through the skids or through the load bearing members attached to the inside surface of the bottom of the container. The fiberboard box or boxes shall be secured in an unused portion of the shipping container. The contents of each shipping container shall be cushioned, blocked, and braced to prevent damage. Closure and strapping shall be in accordance with PPP-B-601.

4.4 Marking (commercial and export). Interior boxes and shipping containers shall be marked in accordance with MIL-STD-129.

5. NOTES

5.1 Intended use. The kettles covered by this commercial item description are intended for use in permanent kitchens and galleys.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating type, style, capacity/size, and class required (see 1.1, 1.2, 5.4).
c. Whether an electrical or mechanical water metering device is required (see 2.1).
d. Whether a lift-off type cover with handle is required (see 2.1.1).
e. Whether actuators and counter-balancing springs are required (see 2.1.1).
f. Whether braced legs are required (see 2.1.3.1).
g. Government approved manual number to be included on data nameplate (see 2.4).
h. Selection of applicable packaging and packing required (see 4.1).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ASME documents are available from:

American Society of Mechanical Engineers
Managing Director of Codes and Standards
345 East 47th Street
New York, NY 10017



Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

NSF International Standard No. 4 - Commercial Cooking Rethermalization and Powered Hot Food Holding and Transport Equipment


NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

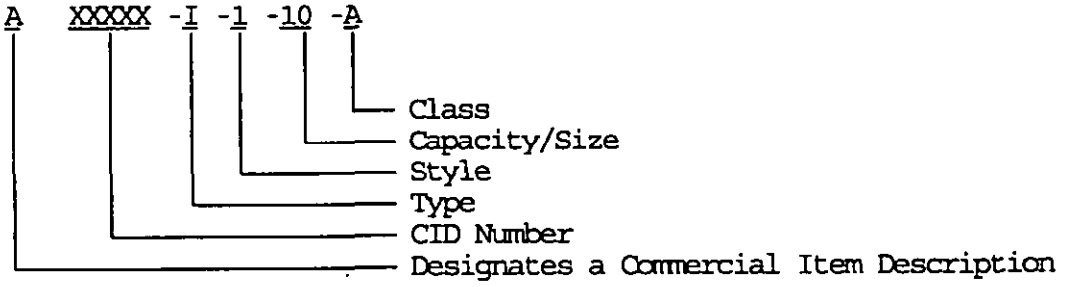


5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MD, QM
Navy - CG, MC
Air Force - 50, 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7310-0829



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.