INCH-POUND

A-A-52145
January 14, 1994

COMMERCIAL ITEM DESCRIPTION

KETTLES, STEAM JACKETED (STAINLESS STEEL), GAS

The General Services Administration has authorized the use of this Commercial Item Description in preference to RR-K-193.

1. ABSTRACT

1.1 Abstract. This commercial item description covers stainless steel, steam-jacketed, gas kettles in the following sizes:

Size 1 - 20 gallon capacity
Size 2 - 40 gallon capacity
Size 3 - 60 gallon capacity
Size 4 - 80 gallon capacity

1.2 CID based part identification number (PIN). A document based PIN to identify sizes of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The kettles, including the outer casings, shall be fabricated from 300 series stainless steel. The inner body shall be fabricated of a single piece of 18.8 type 304 or 316 stainless steel, as specified (see 5.2). The interior and exterior of the kettle shall have a number 4 sanitary finish as referenced in ASTM A240. The complete assembled unit shall be provided with all piping fittings, valves, controls, gauges, and thermostats for connection to gas, electric, and water supplies. The kettles shall be gas fired by natural or propane gas, as specified (see 5.2), and shall operate at a temperature range of 150°F to not less than 250°F by means of steam generated in a self-contained generator. The kettles shall be thermostatically operated at a steam pressure between 5 and 15 psig.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

The kettles shall be provided with a 1-1/2 inch tangent drawoff, unless otherwise specified (see 5.2), which shall be located at the bottom of the kettle body. The kettles shall rest on a minimum of three legs with adjustable feet. The kettles shall be equipped with a pressure regulator, an automatic ignition system, and a 100% automatic shut-off device. A swing-spout water supply system shall be provided. When specified, a hot and cold water supply system shall be provided (see 5.2). Also, a low water cut-off shall be provided.

2.1.1 Controls. All controls shall be enclosed and shall operate on a nominal 115 V, 60 Hz, single-phase electrical system.

2.1.2 Covers. The kettles shall be equipped with one-piece covers with handles. The type of cover shall be specified as hinged or counter balanced (see 5.2). Hinged covers shall be available for the 20 and 40 gallon sizes and counter balanced covers shall be available for 40, 60, and 80 gallon sizes.

2.2 Standard compliance. The kettles shall comply with the applicable requirements of ANSI Z 83.15, ASME Sections IV and VIII, ASTM A240, NSF International Standard No. 4, and UL Standard No. 197 (see 3.2).

2.3 Users instructions ("Government unique" requirement). Operating instructions shall be on an aluminum, brass, or stainless steel plate permanently affixed to the item. Marking shall be stamped, embossed, engraved or applied by photosensitive means. The plate shall contain the information listed below. The words "STEAM-JACKETED KETTLE" shall be not less than 3/16 inch high and the words "USER'S INSTRUCTIONS" shall be not less than 1/8 inch high. All other characters shall be not less than 3/32 inch high. The plate shall be mounted so as to be visible to the operator.

STEAM-JACKETED KETTLE

USERS' INSTRUCTIONS

1. Do not tamper with or obstruct safety valve.

2. Wash and sanitize kettle before and after each use. Wash with hot soapy water. Sanitize all food contact surfaces either by rinsing, spraying, or swabbing the kettle with a solution of 100 parts per million (ppm) available chlorine or 25 ppm available iodine. Rinse thoroughly without allowing water to enter into the control housing. Dry thoroughly inside and outside.

3. Leave cover open when not in use.

4. Never turn on gas unless level of water recommended by manufacturer is observed in gauge glass.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

5. Do not put water in hot dry kettle.

6. When heating a cold kettle, allow the kettle to become warm before full pressure is applied. After kettle becomes warm, and before applying full pressure, open the safety valve momentarily to release any air trapped within the jacket.

7. Clean strainer, draw-off valve, and draw-off tube thoroughly after each use in accordance with manufacturer's recommendations.

2.4 Data nameplate ("Government unique" requirement). The kettles shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the kettle by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the kettle.

2.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.6 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.7 Workmanship. The finished kettles shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the kettle conforms to the applicable requirements of ANSI Z 83.15, ASME Sections IV and VIII, ASTM A240, NSF International Standard No. 4, and UL Standard No. 197.

3.2.1 American National Standards Institute (ANSI). Acceptable evidence of meeting the applicable requirements of ANSI Z83.15 shall be a photostatic copy of the American Gas Association (AGA) Appliance Certificate; a listing of the kettle, regular and quick disconnect devices and connections in the AGA Directory of Certified Appliances and Accessories.

3.2.2 American Society of Mechanical Engineers (ASME). Acceptable evidence of meeting the applicable requirements of ASME Boiler and Pressure Vessel Code Sections IV an VII shall be the ASME mark.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

3.2.3 NSF International. Acceptable evidence of meeting the requirements of NSF International Standard No. 4 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

3.2.4 Underwriters Laboratories, Inc. (UL). Acceptable evidence of meeting the requirements of UL Standard No. 197 shall be the UL listing mark, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable requirements of UL Standard No. 197.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each kettle shall be cleaned, preserved, packaged, and packed in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. Each kettle shall be disassembled to the extent specified by the manufacturer to protect parts susceptible to damage during shipment and storage and for the reduction of cubage. The kettles and disassembled parts shall be preserved and cushioned to provide adequate protection against corrosion, deterioration, and damage during shipping and storage. Disassembled and detached parts shall be packaged in a snug-fitting fiberboard box conforming to PPP-B-636.

4.3.2 Export packing. Each kettle with disassembled parts shall be packed in a snug-fitting, wood-cleated plywood box conforming to domestic type, style A or B, type 3 load of PPP-B-601. The contents of the box shall be cushioned, blocked, and braced to prevent movement and damage while in transit. Closure and strapping shall be in accordance with PPP-B-601.

4.4 Marking (commercial and export). Interior boxes and shipping containers shall be marked in accordance with MIL-STD-129.

5. NOTES

5.1 Intended use. The kettles covered by this commercial item description are intended for use in permanent kitchens and galleys to prepare most dishes such as vegetables, soups, sauces, pasta, rice, pie fillings, gravies, and poultry.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating size required (see 1.1, 1.2, and 5.4).
c. Type of stainless steel for inner body (see 2.1).
d. Type of gas supply (see 2.1).
e. When an optional size of 2" or 3" drawoff is required (see 2.1).
f. When a hot and cold water supply system is required (see 2.1).
g. Type of cover required (see 2.1.1).
h. Options: Electronic ignition, 1/8" perforated or solid disc strainers, basket inserts, water meter, and kettle brush kits.
i. Government approved manual number to be included on data nameplate (see 2.4).
j. Selection of applicable packaging and packing required (see 4.1).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ANSI documents are available from:

American National Standards Institute (ANSI)
11 West 42nd Street
New York, NY 10036

ASME documents are available from:

American Society of Mechanical Engineers
Manuel Guiterres, Managing Director
Codes and Standards
345 East 47th Street
New York, NY 10017

ASTM A240 - Standard Specification for Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

NSF International Standard No. 4 - Commercial Cooking, Rethermalization and Powdered Hot Food Holding and Transport Equipment

NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standard No. 197 - UL Standard for Safety Commercial Electric Cooking Appliances


UL Standards are available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

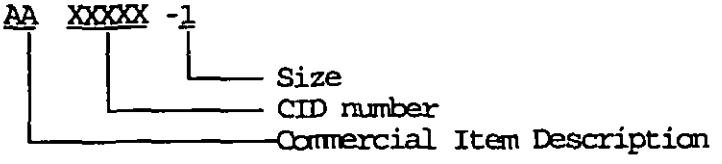

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)

7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)
U.S. Army Natick RD&E Center	(1) Commercial: 508-651-5175 (2) AUTOVON/DSN: 256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SATNC-WEE Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T20:07:27
Check the source to verify that this is the current version before use.