INCH-POUND

A-A-52148
January 14, 1994

COMMERCIAL ITEM DESCRIPTION

STEAM TABLES (COMMERCIAL, HEAVY DUTY, STEAM, GAS, OR ELECTRICALLY HEATED)

The General Services Administration has authorized the use of this Commercial Item Description in preference to S-S-710.

1. ABSTRACT

1.1 Abstract. This commercial item description covers commercial, heavy duty, steam, gas, or electrically heated steam tables in the following types, styles, and sizes:

Type I - Steam heated
Type II - Electrically heated
Type III - Gas heated

Style 1 - with protector shelf
Style 2 - without protector shelf

Size 1 - Four table - top openings (60 inches to 63 inches long - nominal)
Size 2 - Five table - top openings (70 inches to 77 inches long - nominal)
Size 3 - Six table - top openings (86 inches to 91 inches long - nominal)

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

1.2 CID based part identification number (PIN). A document based PIN to identify type, style, and size of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

2. SALIENT CHARACTERISTICS

2.1 Design and construction. Steam tables shall be fabricated of 300 series stainless steel as listed in American Society for Testing and Materials (ASTM) Standard A167 and shall be of the types, styles, and sizes as specified (see 1.1). The top shall be constructed of type 304, 18.8, 18 gauge stainless steel to provide the strength necessary to support the pans without distortion. Tables shall be 30 inches wide (nominal) and 34 inches high (nominal) from floor to table top. Table top openings shall be designed to accommodate standard 12 inch by 20 inch full size pans and smaller sizes down to 1/3 size pans. Tables shall be enclosed on three sides with the attendant's side open and shall be provided with a full length lower shelf with a turned down flange on the attendant's side. The side opposite the attendant side shall be provided with a back-splash of at least 6 inches high. The body frame shall be an integral unit with provisions for supporting legs. Size 1 tables shall have four legs with adjustable feet. Size 2 and 3 tables shall have six legs with adjustable feet. Tables shall be equipped with a full length water tank provided with a drain and openings for electrical elements or steam pipes, as required. Each table shall be equipped with a faucet securely mounted at the table end and an overflow tube.

2.1.1 Protector shelf (type I tables). The protector shelf shall be the same length as the table top, securely mounted to the table, and shall be approximately 16 inches above the table and shall have a glass front.

2.1.2 Type I tables (steam heated). The contractor shall provide all valves required for installation of the table. The steam coil shall extend the entire length of the tank and shall be designed to operate with saturated steam at a pressure not to exceed 40 psig. A thermostat shall also be provided.

2.1.3 Type II table (electrically heated). Unless otherwise specified type II tables shall operate on a 208 V, single-phase, 60 Hz system (see 5.2). Provisions shall be made for grounding of the table. Heating elements shall be provided at a 5000 wattage rating for size 1 tables, 6000 wattage rating for size 2 tables, and 9000 wattage rating for size 3 tables. Each heating element shall be provided with a thermostat and a low water cutoff.

2.1.4 Type III tables (gas heated). Type III tables shall be designed to operate on natural gas with provisions for liquefied petroleum gas (LPG).

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the currentversion before use.

An automatic pilot, including a 100 percent shut-off, shall be provided on each unit. Each table shall be provided with a gas thermostat. Minimum BTU inputs shall be 33,000 for size 1 tables, 39,000 for size 2 tables, and 52,000 for size 3 tables.

2.1.5 Standard compliance. All steam tables shall comply with the applicable requirements of ASTM Standard A167 and NSF International Standard No. 4. Types II and III tables shall conform to UL Standard No. 197. Type III tables shall conform to ANSI Standard No. Z83.14.

2.1.6 Food pans. Food pans and tureens shall be procured separately and shall be of the size and quantities specified by the using agency.

2.2 User instructions ("Government unique" requirement). The steam tables shall be provided with a user's instruction plate. The instructions shall be etched or die stamped on a stainless steel plate or shown on a photosensitive anodized aluminum plate. The plate shall be permanently attached to the attendant's side of the table and shall contain the following instructions and heading:

USERS' INSTRUCTIONS

1. Fill steam table pan to proper level with hot water before turning on heat.

2. Keep appliance clean. Do not allow grease or stains to remain on metal parts. Do not use steel wool for cleaning. Use a brush with cleaning powders and hot water to remove food particles and sediment.

3. After serving, turn off heat, drain water compartment, and thoroughly clean inside of compartment of all food particles and sediment.

4. Wash and rinse all food pans and soup tureens after use and disinfect as instructed by those in authority.

2.3 Data nameplate ("Government unique" requirement). The steam table shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the steam table by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number

Source: https://assist.dla.mil -- Downloaded: 2026-10-26109:07Z
Check the source to verify that this is the current version before use.

CID Based Part Identification Number
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the steam table.

2.4 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.5 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.6 Workmanship. The finished steam tables shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the steam table conforms to the requirements of ASTM Standard A167, NSF International Standard No. 4, UL Standard No. 197, and ANSI Standard No. Z83.14, as applicable.

3.2.1 Underwriters Laboratories, Inc. (UL). Acceptable evidence of meeting the requirements of UL Standard No. 197 shall be the UL listing mark, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable requirements of UL Standard No. 197.

3.2.2 NSF International. Acceptable evidence of meeting the requirements of NSF International Standard No. 4 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

3.2.3 American National Standards Institute (ANSI). Acceptable evidence of meeting the applicable requirements of ANSI Standard No. Z83.14 shall be a photostatic copy of the American Gas Association (AGA) Appliance Certificate; a listing of the steam table, regular and quick disconnect devices and connections in the AGA Directory of Certified Appliances and Accessories.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each steam table shall be cleaned, preserved, packaged, and packed in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. Each steam table shall be disassembled to the extent determined by the manufacturer to protect parts susceptible to damage during shipment and storage and for the reduction of cubage. Disassembly shall be such that special skills or special tools, other than those furnished, or both, are not required to place the steam table in operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

Disassembled parts shall be identified. The steam table and disassembled parts shall be preserved and cushioned to provide adequate protection against corrosion, deterioration, and damage during shipment and storage. Disassembled and detached parts shall be packaged in a snug-fitting fiberboard box conforming to PPP-B-636.

4.3.2 Export packing. Each steam table shall be packed in a snug-fitting, wood-cleated plywood box conforming to domestic type, style A or B, type 3 load of PPP-B-601. The contents of each box shall be cushioned, blocked, and braced to prevent movement and damage while in transit. Closure and strapping shall be in accordance with PPP-B-601.

4.4 Marking (commercial and export). Interior boxes and shipping containers shall be marked in accordance with MIL-STD-129.

5. NOTES

5.1 Intended use. The steam tables covered by this commercial item description are intended for use in dining facilities to keep food hot, but are not intended to reheat or cook food.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating type, style, and size required (see 1.1, 1.2, and 5.4).
c. Electrical characteristics if other than those specified (see 2.1.3).
d. Government approved manual number to be included on data nameplate (see 2.4).
e. Selection of applicable packaging and packing required (see 4.1).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ANSI Standard No. Z83.14 - Gas Food Service Equipment Counter Appliances

ANSI documents are available from:

American National Standards Institute (ANSI)
11 West 42nd Street
New York, NY 10036

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

NSF International Standard No. 4 - Commercial Cooking, Rethermalization and Powdered Hot Food Holding and Transport Equipment

NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standard No. 197 - UL Standard for Safety Commercial Electric Cooking Appliances


UL Standards are available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

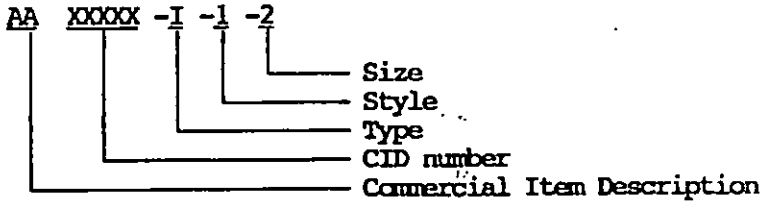

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

A-A-52148

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - CE, MD, QM
Navy - CG, MC
Air Force - 50, 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7310-0826

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.