INCH-POUND

A-A-52191
August 19, 1994

COMMERCIAL ITEM DESCRIPTION

DISPENSER, CARBONATED BEVERAGE, MECHANICALLY REFRIGERATED; COUNTERTOP DISPENSING, REMOTE SYSTEM

The General Services Administration has authorized the use of this commercial item description in preference to MIL-D-43913 for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers mechanically refrigerated post-mix, pressure type carbonated (soft drink) beverage dispensers, with remote countertop dispensing units.

1.2 Classification. The beverage dispensers shall be of the following sizes, as specified (see 5.2):

Size 1 - 300 six-ounce drinks per hour capacity
Size 2 - 480 six-ounce drinks per hour capacity
Size 3 - 900 six-ounce drinks per hour capacity

1.3 CID based part identification number (PIN). A document based PIN to identify size of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.3).

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The dispenser shall be a mechanically refrigerated, post-mix, pressure flow type, consisting of a floor mounted refrigeration unit, counter mounted dispensing heads, and insulated conduit for remote dispensing head installation. Unless otherwise specified (see 5.2), the finish and material shall be the manufacturers standard design.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018 by using the Standardization Documents Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

2.1.1 Dispensing heads. Each dispensing head shall have 4 electrically actuated post-mix dispensing valves. Each valve shall be easily removable with basic hand tools for servicing, without interrupting the operation of the other dispensing valves. One or two dispensing heads, as specified (see 5.2), shall be included with each dispenser. The dispenser shall be a countertop mounted type. A removable drain pan and perforated tray shall be provided under the dispensing valves. The drain pan shall be removable without any special tools and shall have a drain hole capable of being left open or closed.

2.1.2 Refrigeration unit. The refrigeration unit shall consist of a compressor, condenser, pump, ice bank (when used), carbonator, electrical and plumbing connections. The refrigeration unit shall have maximum overall dimensions of 33 inches long, 26 inches wide and 32 inches high. The refrigeration unit cabinet shall be fabricated of materials and components of the quality normally used by the manufacturer in his standard commercial dispensers, provided the completed end item complies with all provisions of this document. The refrigeration unit shall be completely self-contained, pre-charged and wired with a hermetically sealed compressor unit that shall be capable of maintaining a continuous drink temperature of 40°F and under at the dispensing head, and shall conform to ASHRAE Standard 91. The dispenser drinks capacity, under the above conditions, shall not be less than that shown in table I. Unless otherwise specified (see 5.2), the unit shall operate on a nominal water pressure of 62 pounds per square inch gage (psig), and if required shall be provided with a water pressure regulator (see 5.2). The unit shall be provided with quick disconnect fittings for cold water, syrup, and the carbon dioxide gas supply. There shall be no leakage of refrigerant from a fully charged refrigeration unit when tested as specified in 3.7.1.

TABLE I. Capacity Requirements

Dispenser Size	Dispenser Capacity (6-ounce drinks per hour)
1	300
2	480
3	900

2.1.2.1 Ozone depleting substances. Class 1 ozone depleting substances, in accordance with section 602 (a) of the Clean Air Act Amendments 1990, 42 USC 7671a (a) as implemented by 40 CFR 82, Protection of Stratospheric Ozone, shall not be used for refrigerant gases, or for any other purposes, or employed in any process associated with the manufacture of any component parts for this item.

2.1.3 Insulated conduit. An insulated conduit, in the length specified (see 5.2), with water, syrup, and carbonator lines shall be provided.

2.2 Electrical characteristics. Unless otherwise specified (see 5.2), the refrigeration system shall operate on a 120 volt, 60 Hz, single phase electrical system. A 3-wire electrical cord 6 to 10 feet in length conforming to UL 62, with a 3 prong grounding type plug conforming to NEMA WD-1 shall be provided. Wiring practices shall be in accordance with NFPA 70.

2.3 Codes and standards. The remote carbonated beverage dispenser system shall comply with the applicable requirements of the following (see 3.4):

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:07Z
Check the source to verify that this is the current version before use.

American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) Standard No. 91
Environmental Protection Agency (EPA) Clean Air Act Amendment 42 USC 7671a (a), and 40 CFR 82
National Electric Manufacturers Association (NEMA) Standard WD-1
National Fire Protection Association (NFPA) Standard No. 70
NSF International Standard No. 18
Underwriters Laboratories (UL) Standard Nos. 62 and 471

2.4 Data name plate ("Government unique" requirement, see 5.5). The dispenser shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying; (b) Identification tags; (c) Information not required; and (d) Optional marking information, shall not apply. The data name plate shall be metal and mechanically fastened to the dispensers or shall be the permanent stick-on type. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

National Stock Number
Procurement Contract Number
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (when different from Manufacturer)
Size and Manufacturer's Model and Serial Number
Government Approved Manual Number (when manual is specified, see 5.2)

Each plate shall be placed so that it is readily visible to the operator during normal operating use of the dispenser and as to not adversely affect the life and utility of the dispenser.

3. QUALITY ASSURANCE PROVISIONS

3.1 Contractor certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and except for those "Government unique" requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provision of the contract.

3.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

3.3 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

3.4 Standards compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the carbonated beverage dispenser conforms to the requirements of those standards specified in 2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.5 End item examination. The contractor is responsible for assuring that the product offered conforms to the stated requirements. Three completely assembled dispensers shall be randomly selected from the quantity to be shipped under the current contract or purchase order and inspected for the defects listed below. The finding of any defect shall be cause for rejection of the lot.

Any component missing
Not constructed as specified
Post-mix dispensing valves not as specified
Any hardware or fittings missing
Physical damage - dents, or malformed components

3.6 End item testing. Carbonated beverage dispensers shall be tested as specified in 3.6.1 and 3.6.2.

3.6.1 Refrigerant leakage test. Each beverage dispenser shall be subjected to the refrigerant leakage test. With the refrigeration system fully charged and at rest (not in the operating cycle, refrigerant pressure equalized throughout the system), the complete refrigeration system shall be scanned with an electronic leak detector(s) calibrated and certified to detect leakage of refrigerant-12 or other fully halogenated chloroflourocarbon refrigerant at a rate of one half ounce (0.500 oz.) per year or less. Indications of the presence of leaking refrigerant shall constitute failure of the leakage test. This test may be administered as a part of statistical process controls associated with the manufacturing processes for the assembly of the beverage dispenser, and shall be in addition to any other leak testing of the system completed prior to final charging with refrigerant.

3.6.2 Operational test. When specified (see 5.2), and during end item examination, one system shall be tested for performance as specified in ASHRAE Standard No. 91.

4. PACKAGING

4.1 Packing. Packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packing. Each dispenser shall be packed in accordance with ASTM D 3951.

4.3 Export packing. Each dispenser shall be packed in a snug-fitting, wood-cleated plywood box conforming to domestic type, type 2 load PPP-B-601. Components of each dispenser shall be blocked, braced and cushioned to prevent movement and damage while in transit. Closure and strapping shall be in accordance with PPP-B-601.

4.4 Marking (commercial and export). Shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5. NOTES


5.1 Intended use. The dispensers are intended for use in feeding areas to dispense carbonated drinks. Dispensing towers are used in the serving line while the refrigeration system is remotely located.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. Size of beverage dispenser required (see 1.2).
c. Dispenser head finish and material, when other than specified (see 2.1).
d. Number of dispensing heads required per dispenser (see 2.1.1).
e. Water supply pressure, if other than 62 psig (see 2.1.2).
f. When a water pressure regulator is required (see 2.1.2).
g. Length of insulated conduit required per dispenser (see 2.1.3).
h. Electrical characteristics, if other than specified (see 2.2).
i. The Government approved manual number is to be included on the data name plate when manuals are purchased under the contract (see 2.4).
j. When the operational test is required (see 3.6.2).
k. Type of packing required (see 4.1).

5.3 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

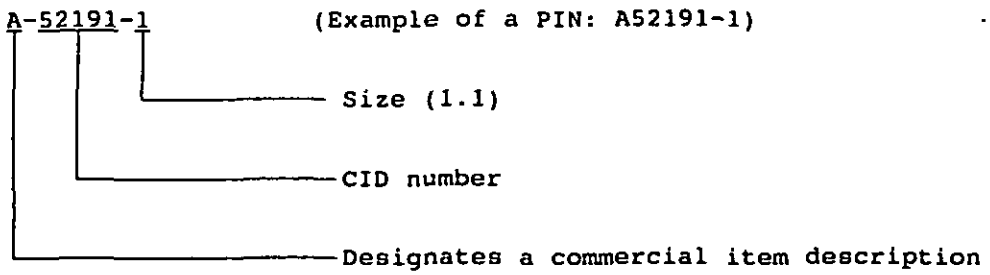

5.4 Sources of documents.

5.4.1 Sources of non-government association documents.

ASHRAE Standard No. 91 - Methods of Treating Pre-Mix and Post-Mix Soft Drink Vending and Dispensing Equipment, is available from:

American Society of Heating,
Refrigerating and Air-Conditioning Engineers (ASHRAE)
1791 Tullie Circle, NE
Atlanta, GA 30329

ASTM D 3951 - Standard Practice for Commercial Packaging, is available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

EPA Clean Air Act Amendment 42 USC 7671a(a), is available from:

Environmental Protection Agency (EPA)
401 M Street, SW
Washington, DC 20460

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

NEMA Standard WD-1 - General Purpose Wiring Devices, is available from:

National Electrical Manufacturers Association (NEMA)
2101 L Street, N.W.
Washington, DC 20037

NFPA Standard No. 70 - National Electrical Code, is available from:

National Fire Protection Association (NFPA)
One Batterymarch Park
Quincy, MA 02269

NSF International Standard No. 18 - Manual Food and Beverage Dispensing Equipment, is available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standard Nos.:
62 - Flexible Cord and Fixture Wire, and
471 - Commercial Refrigerators and Freezers, are available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

5.4.2 Sources of government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.5 Government unique requirements. Whenever a "Government Unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

5.6 Sources of supply. Manufacturers whose products are known to meet the CID requirements are as listed below. However, competition is not limited to these companies:

Booth Incorporated
2310 McDaniel Drive
Carrollton, TX 75006-6843

Follett Corporation
801 Church Lane
Easton, PA 18044

Multiplex Company, Inc.
250 Old Ballwin Road
Ballwin, MO 63021-4834

IMI Cornelius Company
One Cornelius Place
Anoka, MN 55303-1592

K-Way Products, Inc.
759 West Commercial
Mount Carroll, IL 61053

Remcor Products Company
500 Regency Drive
Glendale Heights, IL 60139-2268

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

Cecilware Corporation
40-05 20th Avenue
Long Island City, NY 11105-1295

Wilshire Corporation
An Alco Food Service Co.
2788 Winstead Road
Torrington, CT 06790

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD, QM
Air Force - 35, 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7310-0803

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52191	94-08-19

3. DOCUMENT TITLE: DISPENSER, CARBONATED BEVERAGE, MECHANICALLY REFRIGERATED; COUNTERTOP DISPENSING, REMOTE SYSTEM

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY		
a. NAME U.S. Army Natick RD&E Center	b. TELEPHONE (*Include Area Code*) (1) Commercial 508-651-5175	(2) AUTOVON/DSN 256-5175
c. ADDRESS (*Include Zip Code*) Commander, U.S. Army Natick RD&E Center ATTN: SATNC-WEE Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-02-26 09:07Z
Check the source to verify that this is the current version before use.