FED. SUP CLASS
5950

RATINGS

| | |
|---|---|
| STYLE | LT4 |
| GRADE | 1 |
| CLASS | B |
| MAXIMUM OPERATING TEMPERATURE | 125°C |
| TEMPERATURE RISE | 35°C |
| AMBIENT TEMPERATURE | 90°C |
| WORKING VOLTAGE | 250 VOLTS |
| TERMINAL PULL | 5 POUNDS |
| ALTITUDE | 70,000 FEET |

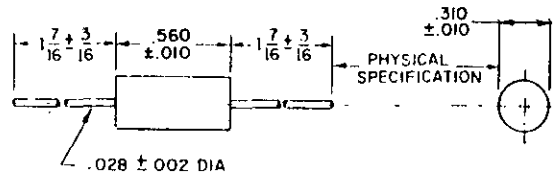


ALL DIMENSIONS IN INCHES

ELECTRICAL CHARACTERISTICS (INITIAL)

| Dash No. 1/ | Type designation | Replaced type designation | Replaced MS part No. | Inductance | Q min | Test frequency | Self-resonant frequency, min. | DC resistance max | Rated dc current 2/ |
|---|---|---|---|---|---|---|---|---|---|
| | | | | uh | | Mc | Mc | Ohms | ma |
| -1 | LT4K059 | LT7K218 | MS16223-8 | 180 ±10% | 80 | 0.790 | 6.0 | 5.5 | 225 |
| -2 | LT4K060 | LT7K219 | MS16223-9 | 220 ±10% | 80 | 0.790 | 5.5 | 5.9 | 220 |
| -3 | LT4K061 | LT7K220 | MS16223-10 | 270 ±10% | 80 | 0.790 | 5.1 | 6.6 | 210 |
| -4 | LT4K062 | LT7K221 | MS16223-11 | 330 ±10% | 75 | 0.790 | 4.2 | 7.8 | 185 |
| -5 | LT4K063 | LT7K222 | MS16223-12 | 390 ±10% | 75 | 0.790 | 3.9 | 8.7 | 180 |

1/ The dash number added to the MS military-standard number constitutes the MS part number; for example MS75053-1.

2/ For the overload test, the current shall be dc and 1½ times the rated dc current.

ELECTRICAL CHARACTERISTICS (FINAL)

| Inspection group | Allowable variation from initial measurement | | | |
|---|---|---|---|---|
| | Inductance | Q | Self-resonant frequency | DC resistance |
| | Percent | Percent | Percent | Percent |
| Qualification inspection: | | | | |
| Group II | 2 | 20 | 5 | 2 |
| Group III | 5 | 15 | 10 | 2 |
| Acceptance inspection: | | | | |
| Group B | 2 | 10 | 5 | 2 |
| Group C | 5 | 15 | 10 | 2 |

NOTES:
1. THE BAROMETRIC-PRESSURE TEST (TEST-CONDITION LETTER C) IS APPLICABLE.
2. INITIAL INSULATION-RESISTANCE TEST, AND INSULATION-RESISTANCE MEASUREMENTS FOLLOWING OTHER TESTS, ARE APPLICABLE.
3. THE TEMPERATURE-RISE, TERMINAL-TWIST, AND SHOCK (METHOD I, CONDITION C, 50G) TESTS ARE APPLICABLE.
4. THE POLARIZING VOLTAGE DURING THE MOISTURE-RESISTANCE TEST IS APPLIED WITH THE POSITIVE LEAD CONNECTED TO THE COIL TERMINALS TIED TOGETHER, AND THE NEGATIVE LEAD CONNECTED TO THE METAL STRAP.
5. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN.
7. VIBRATION-TEST II, TEST CONDITION B, IS APPLICABLE, IN ADDITION UNITS SHALL BE RIGIDLY MOUNTED BY THE BODY.

(B) CANCELED AFTER 19 SEPTEMBER 1972

USE MS 14048

APPROVED 3 May 1963 REVISED (A) 23 April 1964 (B) 19 September 1972

| | | | |
|---|---|---|---|
| P.A. Ships<br>Other Cust EL<br>ASD | TITLE<br>COILS, RADIOFREQUENCY, MOLDED, TYPES LT4K059 TO LT4K063, INCL. | MILITARY STANDARD<br>MS 75053 | |
| PROCUREMENT SPECIFICATION<br>MIL-C-15305 | SUPERSEDES: MS16223 In part<br>Part Nos. MS16223-8 through MS16223-12. | SHEET 1 OF 1 | |

...tary standard is approved by the Dep... of Defense and ... ry for all activities. Selection for ... applications and for repetitive use shall be made from this document.

☆U.S. GOVERNMENT PRINTING OFFICE:1972-714-538/1705

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.