This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF ☐ 11, 85, 17 @ 19, 14 Army ☐ EL, MU Navy ☐ WP, SH @ MC

FED. SUP CLASS
5950

CASE, MOUNTING, TERMINAL ARRANGEMENT, AND MARKING

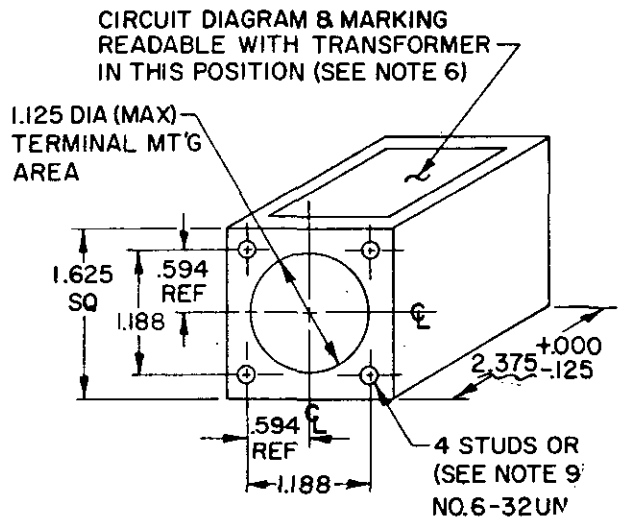

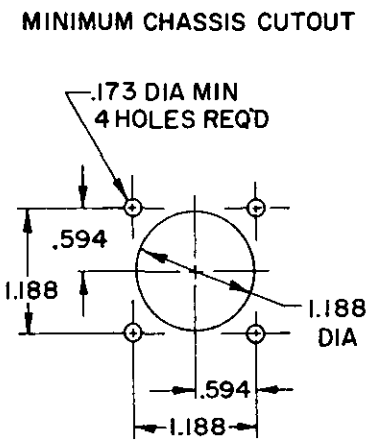

INCHES	MM
.125	3.18
.173	4.39
3/8	9.53
.594	15.09
1.125	28.58
1.188	30.18
1.625	41.28
2.375	60.33

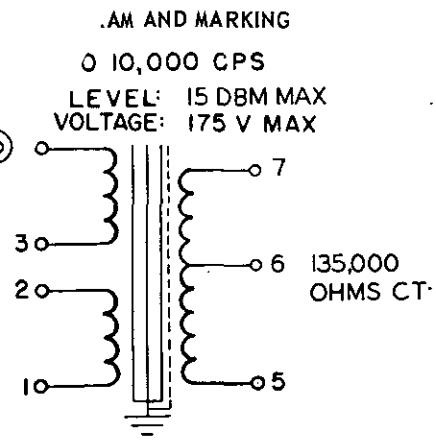

MAX ALTITUDE: 50,000 FT

CANCELED AFTER 1 AUGUST 1975
USE MIL-T-27/5

NOTES:
1. All dimensions in inc
2. Unless otherwise sp
3. Tolerance on mour
with respect to th
4. Metric equivaler
1 inch = 25.4 mm.
5. Terminal arrangement o
6. Type designation, MS part n
7. Referenced document shall be o
8. For design feature purposes, this standard takes precedence over procurement document referenced herein.
9. Inserts not recommended for new design.

all case dimensions is +.000 (.00 mm), −.063 (1.60 mm).
(.41 mm). Mounting studs or inserts are symmetrically located
.
) are shown for general information only and are based upon
mounting area indicated.
nufacturer's name or code symbol to be marked on side opposite terminals.
issue in effect on date of invitations for bid.

Mounting	MS part no.	Type designation
Studs	MS90002-A	TF4RX10AJ001
Inserts	MS90002-B	TF4RX10AJ001

APPROVED 28 JUNE 1956 REVISED (A) 19 FEB 1960 (B) 28 FEB 1961 (C) 21 Sep 65 (D) 1 AUG 1975

P.A. Army - EL Other Cust Navy - SH Air Force - 11	TITLE TRANSFORMER, AUDIO FREQUENCY TYPE TF4RX10AJ001	MILITARY STANDARD MS90002
Procurement Specification MIL-T-27	SUPERSEDES:	SHEET 1 OF 2

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0498-3

Source: https://assist.dla.mil - Downloaded: 2020-10-25T20:30Z
Check the source to verify that this is the current version before use.