FED. SUP CLASS
9535

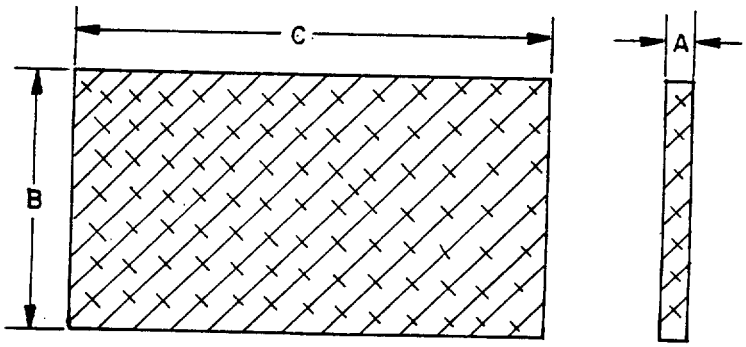


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A NOMINAL SIZE INCHES	B NOMINAL SIZE INCHES	C NOMINAL SIZE FEET
-001	.020	36	8
-003	.025	12	10
-005	.030	36	6
-007	.032	36	8
-009	.032	48	12
-011	.040	36	8
-013	.040	48	12
-015	.080	48	12

REQUIREMENTS:

1. MATERIAL: ALUMINUM ALLOY 6061 (UNS A96061) AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. FORMING PROCESS: ROLLED - MILL FINISH
3. TEMPER: T6
4. PART NUMBER: THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS90513-001
   - (SEE TABLE I)
   - BASIC MS NUMBER
5. MARKING: ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-184 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
2. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 4 May 1967 REVISED

USER ACTIVITIES: NAVY - MC,OS,SH

REVIEWER ACTIVITIES: ARMY-AR,AT; DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A. NAVY-YD Other Cust ARMY - MR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SHEET, METAL, ALUMINUM ALLOY 6061	MILITARY STANDARD MS90513
PROCUREMENT SPECIFICATION ASTM B209	SUPERSEDES:		PAGE 1 OF 1

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9535-0436

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:38Z
Check the source to verify that this is the current version before use.