INCH-POUND

MS90578B
7 November 2005
SUPERSEDING
MS90578A
30 January 1970


DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, (TWIN BINDING POST-BNC MALE)
TYPE UG-1441/U

Inactive for new design 15 June 1999

This specification is approved for use by all Departments
and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of
this specification sheet and MIL-DTL-27434.

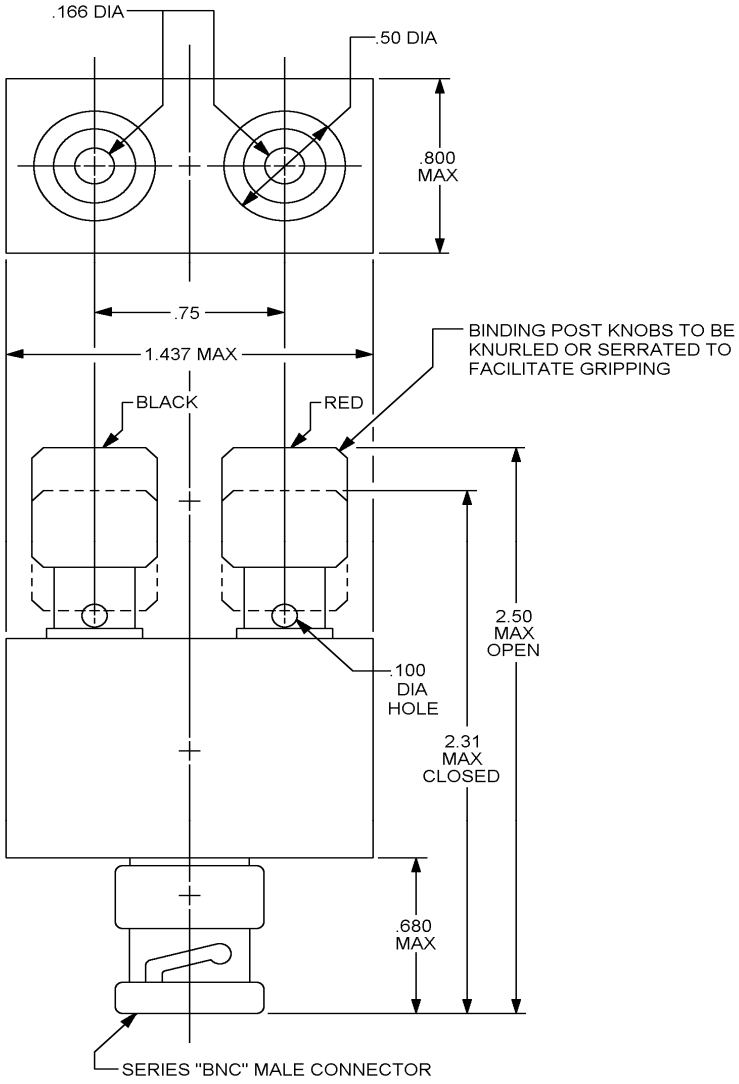

Inches	mm	Inches	Mm
.100	2.54	.800	20.32
.166	4.22	1.437	36.50
.50	12.7	2.31	58.67
.680	17.27	2.50	63.50
.75	10.05		

FIGURE 1. Type UG-1441/U Connector.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.02 (.51 mm) and ±.005 (.13 mm).

FIGURE 1. Type UG-1441/U Connector - Continued.

Dimensions and configuration: In accordance with Figure 1 and MIL-STD-348 for BNC pin contact interface.

Frequency range: 500 MHz, maximum.

Voltage rating: 500 volts rms, maximum at 60 Hz.

Corrosion: Method 101 of MIL-STD-202 test condition B.

Finish: Center contact. The male pin shall be plated to a minimum gold thickness of 50 micro inches (1.27μm) in accordance with ASTM B488, type II, Code C, class 1.27, over 50 micro inches (1.27μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, measured anywhere along the mating surface, for all series. The socket contact shall be plated to a minimum of 50 micro inches (1.27 μm) of gold in accordance with ASTM B488, type II, Code C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, including the I.D., measured at a depth of .040 inch minimum. The plating on non-significant surfaces in the I.D. shall be of sufficient thickness to ensure plating continuity and uniform utility and protection. This plating may consist of an underplate only. A silver underplate shall not be permitted.

Finish: All other parts shall be silver plated to a minimum thickness of 0.0002 inches (0.005 mm) in accordance with ASTM B700.

Materials:

Ferrules: Nylon in accordance with ASTM D4066 or Phenolic In accordance with ASTM D5948.

Metal parts: Brass in accordance with ASTM B121, ASTM B36, ASTM B16, ASTM B16M and ASTM B124. Silver plated to a minimum thickness of 200 microinches in accordance with ASTM B700 or Nickel plated 200 microinches minimum in accordance with SAE-AMS-QQ-N-290.

Body: Styrene in accordance with L-P-516 or acrylonitrile-butodiene-styrene in accordance with ASTM D4673.

Part or Identifying Number (PIN): MS90578-1441.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-27434, this document references the following:

MIL-STD-202
MIL-STD-348
L-P-516
ASTM B16
ASTM B16M
ASTM B36
ASTM B124
ASTM B121
ASTM B488
ASTM B700
ASTM D4066
ASTM D4673
ASTM D5948
SAE-AMS-QQ-N-290

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
Air force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4749-000)

Review activities:
Army – AR, CR4, MI
Navy – AS, CG, MC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.