INCH-POUND

MIL-DTL-55302/94E
17 November 2004
SUPERSEDING
MIL-C-55302/94D(CR)
12 February 1982

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, INSERT (INSULATOR), RECTANGULAR, POLARIZED, REMOVABLE, CRIMP TYPE HERMAPHRODITIC CONTACTS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.


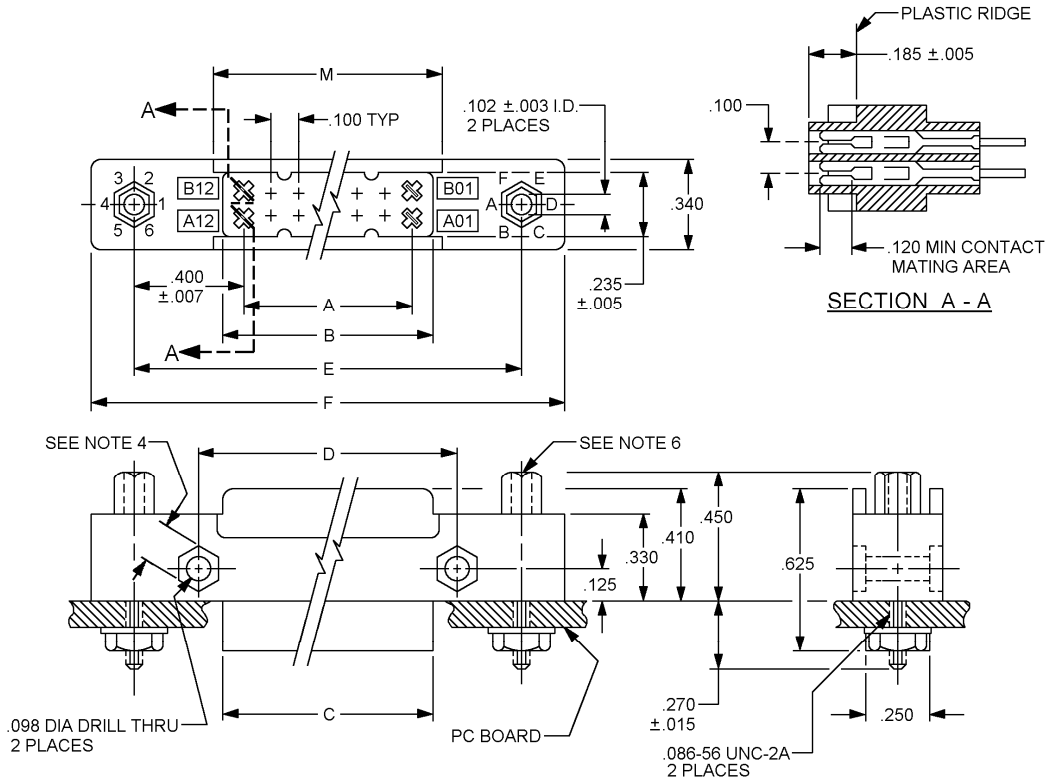


FIGURE 1. Connector, receptacle (.100 inch spacing).

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

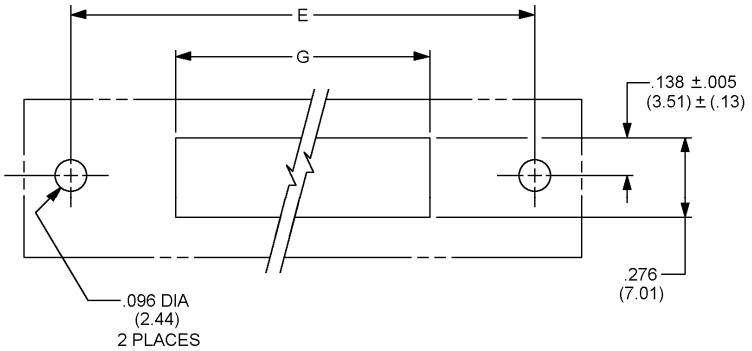

TYPICAL HOLE CUTOUT FOR CRIMPABLE CONTACT

Inches	mm	Inches	mm
.003	0.08	.185	4.70
.005	0.13	.235	5.97
.007	0.18	.250	6.35
.015	0.38	.270	6.86
.086	2.18	.276	7.01
.091	2.31	.320	8.13
.096	2.44	.330	8.38
.098	2.49	.340	8.64
.100	2.54	.400	10.16
.102	2.59	.410	10.41
.120	3.05	.450	11.43
.125	3.18	.462	11.73
.138	3.51	.625	15.88
.163	4.14		

Dash number	Number of contacts	Dimensions							
		A ±.006 (.015)	B ±.006 (.015)	C	D ±.006 (.015)	E ±.006 (.015)	F	G ±.006 (.015)	M ±.006 (.015)
01	24	1.100 (27.94)	1.236 (31.39)	1.240 (31.50)	1.400 (35.56)	1.900 (48.26)	2.200 (55.88)	1.260 (32.00)	1.270 (32.26)
02	28	2.300 (58.42)	2.436 (61.87)	2.440 (61.98)	2.600 (66.04)	3.100 (78.74)	3.400 (86.38)	2.460 (62.48)	2.470 (62.74)
03	72	3.500 (88.90)	3.636 (92.35)	3.640 (92.46)	3.800 (96.52)	4.300 (109.22)	4.600 (116.84)	3.600 (92.96)	3.670 (93.22)
04	96	4.700 (119.38)	4.836 (122.83)	4.840 (122.94)	5.000 (127.00)	5.500 (139.70)	5.800 (147.32)	4.860 (123.44)	4.870 (123.70)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm).
4. Dimensions are .162 (4.11 mm) hex across the flats by .052 deep (1.32 mm) – 4 places.
5. Metric equivalents are in parentheses.
6. Keying sockets shown are in positions 4 and D.
7. Contacts (class A, in accordance with MIL-DTL-55302/97-01) are shipped loose in a plastic bag with each connector unless otherwise specified. When contacts are furnished separately, the letters “WO” shall appear immediately after the military Part or Identifying Number (PIN) marking on the connector. Example: M55302/93-02 WO.
8. For direct government procurements connectors shall be furnished with contacts in a plastic bag with each connector.

FIGURE 1. Connector, receptacle (.100 inch spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Material and finish:

Insulation: ASTM D5948, type SDG-F.

Keying hardware: 2 each hex nuts and washers, stainless steel, class 300 in accordance with ASTM A582, passivated in accordance with SAE-AMS-QQ-P-35, and 2 each keying sockets, free machining brass in accordance with ASTM B16, UNS C36000 or ASTM B121, UNS C35300, C34200 or ASTM B124, UNS C37700 or ASTM B36, UNS C23000, C24000, C26000 or C26800, nickel plated in accordance with SAE-AMS-QQ-N-290. For direct government procurement the keying hardware shall be assembled to the connector. For other orders the keying hardware may be furnished loose as specified in contract or order.

Contact identification: The first and last contact in each row shall be identified by an alphabetical-numerical code (e.g., A01, B12). The letter designates the row and the number designates the contact position within that row. Every fifth contact in each row shall have its identification mark molded in.

Contact retention: 6 pounds.

Mating and unmating: The maximum insertion force, in pounds, shall not exceed a value equal to .5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .11 times the number of contacts and shall not exceed the measured insertion force.

Contact separation force: 1 ounce minimum.

Contact resistance: The contact resistance shall not exceed 20 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 volts rms, 60 Hz.

High altitude: 300 volts rms, 60Hz.

Current rating, maximum: 5 amperes.

Keying socket: When required, can be easily keyed to the desired positions by using a standard type wrench. Connectors are supplied with keying sockets in 4 and D positions.

Mating connectors: Shall conform to MIL-DTL-55302/91 or MIL-DTL-55302/93 and MIL-DTL-55302/95.

Contact crimp removable (class A or B): Shall conform to MIL-DTL-55302/97.

Contact insertion tool: Shall conform to MIL-I-81969/5.

Contact crimp tool: Shall conform to MIL-C-22520.

PIN: M55302/94-(dash number from figure I).

Group submission: MIL-DTL-55302/90, MIL-DTL-55302/92, and MIL-DTL-55302/96.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-C-22520	MIL-I-81969/5	SAE-AMS-QQ-N-290
MIL-DTL-55302/90	ASTM A582	SAE-AMS-QQ-P-35
MIL-DTL-55302/91	ASTM B16	
MIL-DTL-55302/92	ASTM B121	
MIL-DTL-55302/93	ASTM B124	
MIL-DTL-55302/95	ASTM B36	
MIL-DTL-55302/96	ASTM D5948	
MIL-DTL-55302/97		

Previous changes. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4440-013)

Review activities:
Army - AR, AT, AV, CR4, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.