MIL-F-63230 (AR)
AMENDMENT 3
26 APRIL 1984
SUPERSEDING
AMENDMENT 2
8 September 1983

MILITARY SPECIFICATION

FUZE, PIBD, XM740, SECOND ENVIRONMENT SENSOR FOR

This amendment forms a part of Military Specification MIL-F-63230 (AR) dated 17 August 1979, and is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Title block: Add "(M740)" to title and wherever it appears in this specification.

2.1: Specifications, Federal:

Delete reference to QQ-S-634 in its entirety.

* Delete:

"PPP-T-97 - Tape, Pressure Sensitive, Adhesive, Filament Reinforced".

* Add:

"PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

PPP-T-60 - Tape, Packaging, Waterproof".

PAGE 2

Other publications:

Add the following new reference:

"ASTM-A108 - Steel Bars, Carbon, Cold-Finished, Standard Quality Specification for DOD Adopted".

* Delete: "AR700-15 Packaging of Material"

FSC 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

3.2.1.1: Delete in its entirety and substitute the following:

"3.2.1.1 Inductance. The inductance of the coil of the SES assembly when measured between -25° and +145°F shall be 1.53 ± 0.10 millihenrys when measured at a frequency of 1000 Hz ± 3%."

3.2.1.2: Delete in its entirety and substitute the following:

"3.2.1.2 Resistance. The resistance of the coil of the SES shall be R ± 1.0 ohms, where R = 7.31 (1 + .00216 (temperature of test -72°F)). This requirement applies from -25°F to +145°F. (Re: R = 5.76 ohms @ -25°F; R = 8.47 ohms @ +145°F)."

PAGE 3

3.2.2.3, line 3: Delete "direction of acceleration" and substitute "The direction of the applied acceleration."

PAGE 4

Figure 1: Delete in its entirety and substitute the attached Figure 1.

PAGE 5

3.2.2.8, line 1: In title delete "Axial" and substitute "Lateral".

line 2: Delete "axial shock" and substitute "shock".

line 4" Delete "acceleration force" and substitute "acceleration".

PAGE 8

4.5.7.1, line 1: Delete "±5°F" and substitute "+5, -0°F".

4.5.7.2, line 1: Delete "±5°F" and substitute "+0, -5°F".

4.5.7.3, line 2: Delete "mounted in a carrier" and substitute "mounted in a carrier that simulates the mounting means used in the actual projectile".

line 3: Delete "±5°F" and substitute "+5, -0°F".

line 7: Delete "±5°F" and substitute "+5, -0°F".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

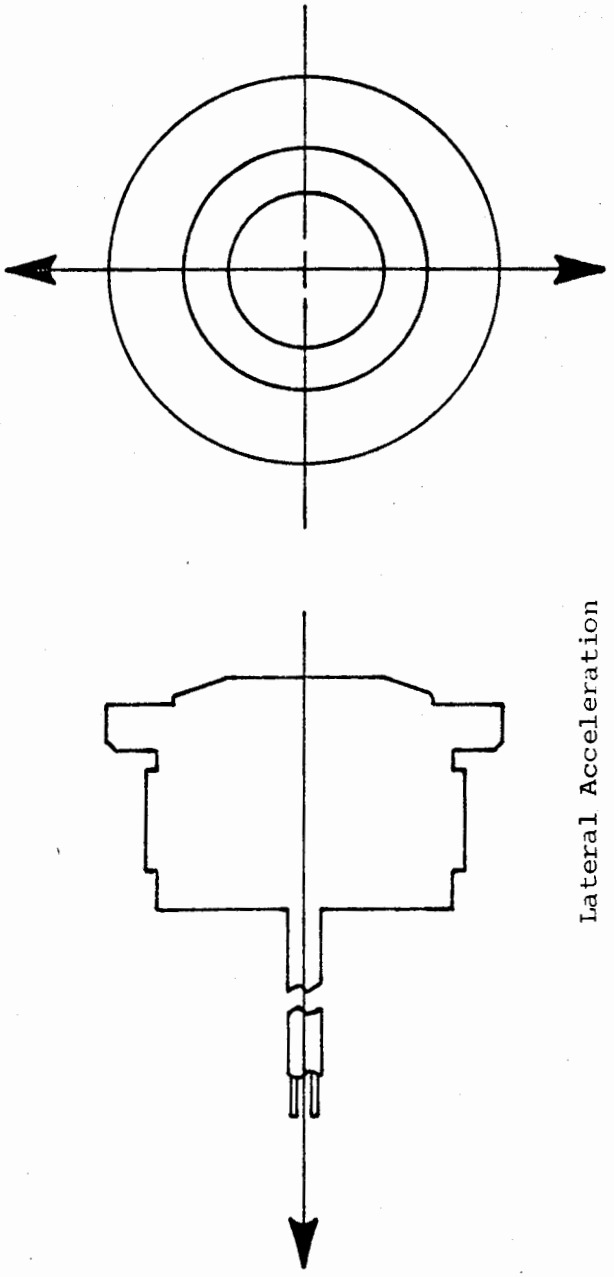


Figure 1 - Direction of Applied Acceleration

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

PAGE 9

4.5.7.4, line 2: Delete "mounted in a carrier "and substitute "mounted in a carrier that simulates the mounting means used in the actual projectile"

line 3: Delete "$\pm$5°F" and substitute "+0, -5°F"

line 7: Delete "$\pm$5°F" and substitute "+0, -5°F".

4.5.7.7, line 4: Add the following:

"The SES shall be mounted by its normal means and in its normal orientation in a suitable carrier such as a 155mm projectile body."

4.5.7.9, line 1: In title, delete "Axial" and substitute "Lateral".

line 2: Delete "axial shock" and substitute "shock".

line 4: Delete "force" and add the following sentence following "Figure 1."

"The SES shall be mounted by its normal means and in its normal orientation in a suitable carrier such as a 155mm projectile body."

PAGE 10

* 5.1 Delete in its's entirety and substitute the following:

"5.1 Preservation and packaging. - Level B. Place each item in a bag in accordance with Type I, Class F, Style 1 of MIL-B-117 and heat seal bag. Place bagged items in a partitioned 275 pound test corrugated fiberboard carton. One bagged item per partition cell. Seal the carton with pressure sensitive case sealing tape in accordance with (PPP-T-60) or water remoistenable reinforced gummed case sealing tape in accordance with (PPP-T-45)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

5.2 Delete in it's entirety and substitute the following:

"5.2 PACKING - Cartons as described in 5.1 shall be labeled and shipped on individual basis. Unitizing of two or more cartons for shipment is not allowed except in overpack cartons, (optional). Overpack, if used, shall consist of 200 pound test corrugated boxes; voids in overpack to be filled with anti-static cushion dunnage. Overpack cartons shall be sealed with PPP-T-60 or PPP-T-45 case sealing tape. Gross shipping weight shall not exceed 65 pounds per carton".

PAGE 13

Major 108: Delete "Distance end to shoulder" and substitute "Distance, base of housing to shoulder".

Major 109: Delete in its entirety and substitute the following:

"109. Distance, shoulder to magnet pole disk surface (maximum) 100% Dwg 9307250 Gage/4.5.3".

PAGE 16

Major 108: Delete "Distance end to shoulder" and substitute "Distance, base of housing to shoulder"

Major 109: Delete in its entirety and substitute the following:

"109. Distance, shoulder to magnet pole disk surface (maximum) 0.40% Dwg 9307250 Gage/4.5.3".

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1390-A429)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.