
MILITARY SPECIFICATION SHEET


SWITCH CAPSULE, DRY REED TYPE, SPST (NO), 1/8 AMPERE

The complete requirements for procuring the switch capsule described herein shall consist of this document and the latest issue of Specification MIL-S-55433.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

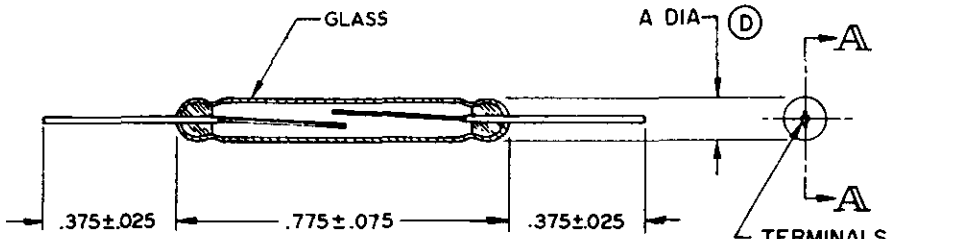

SECTION A-A
NO SCALE



Inches	MM	Inches	MM
.005	.13	.075	1.91
.007	.18	.100	2.54
.025	.64	.128	3.25
.030	.76	.375	9.53
.040	1.02	.775	19.69

Ⓓ Table I. Part numbers, diameter and terminal dimensions.

Part no.	A dia.	Terminals
M55433/2-001	.128 ±.007	Terminals shall fit .040 dia. max hole - 2 req'd
M55433/2-002	.100 ±.007	Terminals shall fit .030 dia. max hole - 2 req'd

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓓ denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Contact resistance: 100 milliohms maximum initial. 2 ohms maximum after life.

Operate and release ampere-turns:
Operate - 35 ±15 NI.
Release - 30 to 75 percent of operate.

Contact bounce: 300 microseconds, maximum.

Operate and release time: 1 millisecond, maximum.

Operating temperature range: -55° to + 125° C.

Dielectric withstanding voltage: 250 volts ac.

Terminal strength: Applied force - 2 pounds.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Ⓓ Part number: See table I.

Load life: See table II.

TABLE II. Load life.

Load current amperes dc	Millions of operations	
	Resistive	
	28v	6v
0.125 (high level)	10	15
0.030 (high level)	30	50
0.010 (low level)	50 at 50 mv	

The loads to be used for life test and the number of sample units for each test shall be as follows:

0.125 amperes, 28v, resistive - 10 sample units
0.030 amperes, 28v, resistive - 5 sample units
0.030 amperes, 6v, resistive - 5 sample units
0.010 amperes, 50 mv, resistive - 10 sample units

All other load-life ratings are for application information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - SH, OS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5930-0683)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.