NOT MEASUREMENT SENSITIVE

MIL-DTL-11589/83E
15 September 1995
SUPERSEDING
MIL-R-11589/83D
30 March 1993

DETAIL SPECIFICATION SHEET

RIBBON, MEDAL OF HONOR

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11589 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.


COLOR PATTERN SIZE: Regular (1/) FINISH: Moire

TOTAL WIDTH	WIDTH OF STRIPES INCHES & METRIC	FUNCTION OF STRIPES	COLOR & CABLE NUMBER STRIPES		FILLING YARN
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	
1-3/8 (35.0 mm)	1-5/16 (33.4 mm)	Ground	Bluebird	HR 67117	White HA 67101
		Stars	White	HA 67101	
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	

PHYSICAL REQUIREMENT OF THE FINISHED RIBBON:

TOTAL WARP ENDS (Minimum):	520
PICKS PER INCH:	80 (1 thread double shot)
WEIGHT PER LINEAR YARD (Minimum):	0.25 ounces (7.09 g)
LINEAR BREAKING STRENGTH FULL WIDTH (Minimum):	90 pounds (40.9 kg)
DENIER OF YARN:	
WARP (Ply): 40/2	FILLING (Ply): 100/2 (Stars & Ground)

1/ REGULAR RIBBON: The 1-3/8 inch (35.0 mm) regular bar ribbon shall be woven with 5 stars in a group. The groups shall be 1-1/4 inch (31.8 mm) apart (center to center) with a cutting mark between each group. The individual stars in the group shall measure 7/64 inch (2.8 mm) in diameter. The ribbon shall be arranged on the bar so that the stars form a letter "M" and 2 rays of each star point downward. (See star layout)

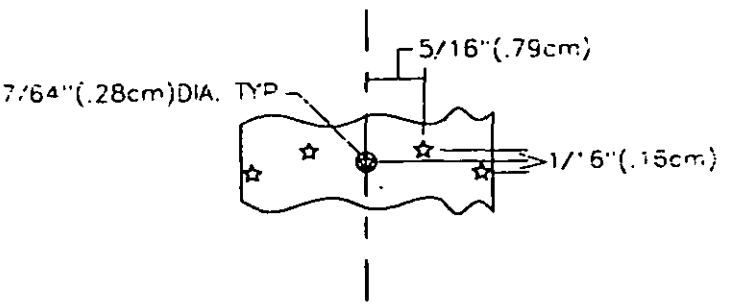

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:50Z
Check the source to verify that this is the current version before use.


COLOR PATTERN SIZE: Rosette (2/) FINISH: Moire

TOTAL WIDTH	WIDTH OF STRIPES INCHES & METRIC	FUNCTION OF STRIPES	COLOR & CABLE NUMBER STRIPES		FILLING YARN
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	
7/8 (22.2 mm)	13/16 (20.6 mm)	Ground	Bluebird	HR 67117	White HA 67101
		Stars	White	HA 67101	
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	

PHYSICAL REQUIREMENT OF THE FINISHED RIBBON:

TOTAL WARP ENDS (Minimum):	190
PICKS PER INCH:	86 (1 thread single shot), 7 each star figure (2 threads single shot)
WEIGHT PER LINEAR YARD (Minimum):	0.16 ounces (4.5 g)
LINEAR BREAKING STRENGTH FULL WIDTH (Minimum):	Not applicable
DENIER OF YARN:	
WARP (Ply):	40/2
FILLING (Ply):	40/2 (Ground) 100/1 (Stars)

2/ ROSETTE RIBBON: The 7/8 inch (22.2 mm) rosette ribbon for the inside of the rosette shall be woven with 3 vertical rows of stars, each row spaced 9/32 inch (7.1 mm), center to center. The middle row shall have stars center to center of ribbon. The individual stars shall measure 1/16 inch (1.6 mm) in diameter. In the direction of the warp, the stars shall be in groups of 2; 7/64 inch (2.8 mm) between stars (center to center) and 11/64 inch (4.4 mm) between groups, star center to star center. The ribbon for covering the outside of the rosette cup shall be woven 1/2 inch (12.7 mm) wide, solid Bluebird HR 67117. (See star layout)

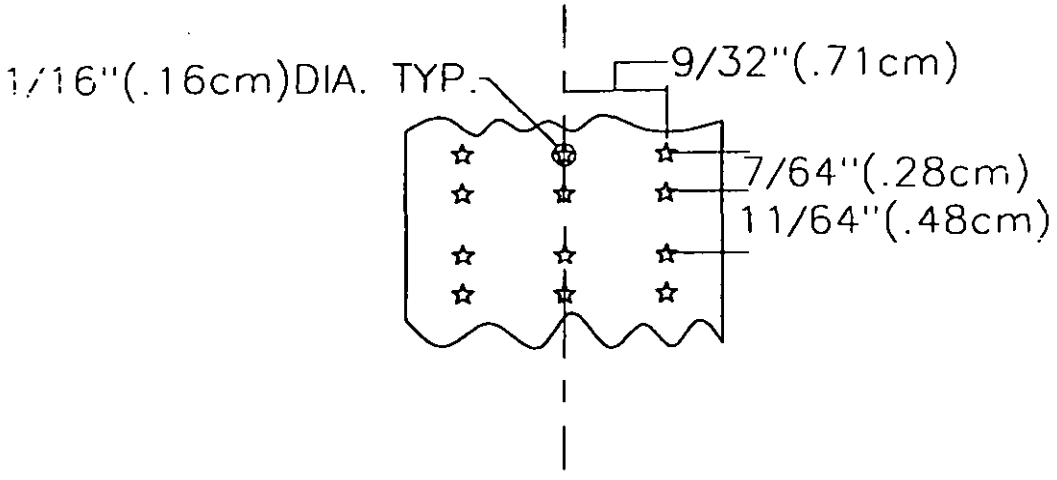

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:50Z
Check the source to verify that this is the current version before use.


COLOR PATTERN — SIZE: Shield Ribbon (3/) FINISH: Moire

TOTAL WIDTH	WIDTH OF STRIPES INCHES & METRIC	FUNCTION OF STRIPES	COLOR & CABLE NUMBER STRIPES		FILLING YARN
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	
2 (50.8 mm)	1-15/16 (49.2 mm)	Ground	Bluebird	HR 67117	White HA 67101
		Stars	White	HA 67101	
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	

PHYSICAL REQUIREMENT OF THE FINISHED RIBBON:

TOTAL WARP ENDS (Minimum):	576
PICKS PER INCH:	80 (1 thread double shot)
WEIGHT PER LINEAR YARD (Minimum):	0.30 ounces (8.5 g)
LINEAR BREAKING STRENGTH FULL WIDTH (Minimum):	100 pounds (45.4 kg)
DENIER OF YARN:	
WARP (Ply): 40/2	FILLING (Ply): 100/2 (Stars & Ground)

3/ SHIELD RIBBON: The 2 inch (50.8 mm) shield ribbon shall be woven with 13 stars in a group. The groups shall be 3 inches (76.2 mm) apart (center to center) with a cutting mark half way between each group. The stars, 5/32 inch (4.0 mm) in diameter, shall form a triple chevron of 5, 5, and 3 white stars at right angles to the warp direction of the ribbon. (See star layout)

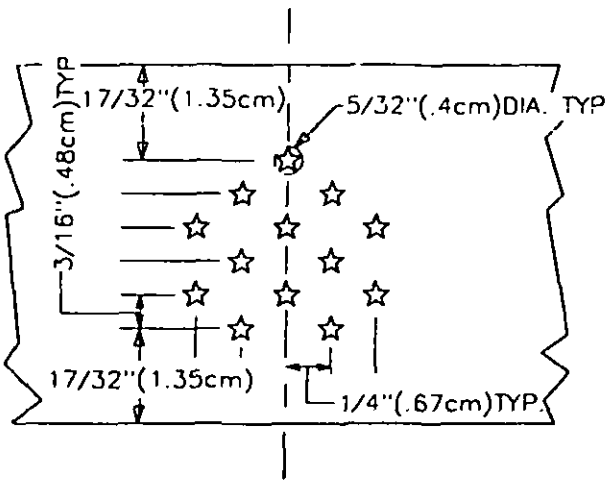

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:50Z
Check the source to verify that this is the current version before use.

COLOR PATTERN SIZE: Neck Ribbon (4/) FINISH: Moire

TOTAL WIDTH	WIDTH OF STRIPES INCHES & METRIC	FUNCTION OF STRIPES	COLOR & CABLE NUMBER STRIPES		FILLING YARN
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	
1-3/8 (35.0 mm)	1-5/16 (33.4 mm)	Ground	Bluebird	HR 67117	White HA 67101
	1/32 (0.8 mm)	Edge & Binder	Bluebird	HR 67117	

PHYSICAL REQUIREMENT OF THE FINISHED RIBBON:

TOTAL WARP ENDS (Minimum):	520
PICKS PER INCH:	80 (1 thread double shot)
WEIGHT PER LINEAR YARD (Minimum):	0.25 ounces (7.09 g)
LINEAR BREAKING STRENGTH FULL WIDTH (Minimum):	90 pounds (40.9 kg)
DENIER OF YARN:	
WARP (Ply): 50/2	FILLING (Ply): 100/3

4/ NECK RIBBON: The 1-3/8 inch (35.0 mm) neck ribbon shall be solid Bluebird HR 67117 without any white stars.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU
Coast Guard - CG

Review activities:
Air Force - 32, 82, 99
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0814)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:50Z
Check the source to verify that this is the current version before use.