MILITARY SPECIFICATION

CONTAINER, REUSABLE, SHIPPING: 10547128

1. SCOPE

1.1 This specification covers the fabrication and testing of one type reusable container assembly for the Memory Unit Disk: 10526600 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-S-633	Steel Bars, Carbon, Cold Finished and Hot Rolled, General Purpose
TT-E-529	Enamel, Alkyd, Semi-Gloss
MMM-A-132	Adhesives, Heat Resistant, Airframe Structural, Metal to Metal

Military

MIL-R-3065	Rubber, Fabricated Parts
MIL-A-5092	Adhesive, Rubber Base, General Purpose
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-B-7883	Brazing of Steels, Copper, Copper Alloys and Nickel Alloys
MIL-W-8604	Welding of Aluminum Alloys, Process For
MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment, and Tools for Ordnance Materiel; Packaging of
MIL-C-21567	Compound, Silicone, Soft Film
MIL-B-23362	Brazing of Aluminum, and Aluminum Alloys
MIL-P-26514	Polyurethane Foam, Rigid or Plastic, For Packaging
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-C-46842	Cushioning Material, Unicellular Polyethylene Foam (For Packaging Purposes)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-108	Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-171	Finishing of Metal and Wood Surfaces
MS 16535	Rivet, Tubular, Oval Head

DRAWINGS

U.S. Army, Frankford Arsenal

A10533221	Plate, Valve Instruction
A10539222	Valve, Relief
B8215734	Card Holder
B10539157	Extrusion Edge Female
B10539158	Extrusion Edge Male
C10539216	Handle Assembly
C10539217	Clamp Assembly

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from procuring activity or as indicated by contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American Society of Testing Materials

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Test for Specific Gravity and Density of Plastics

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society of Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103).

3. REQUIREMENTS

3.1 General.- Container assemblies shall be fabricated to assure a pressure and watertight container capable of protecting equipment against environmental conditions normally encountered during storage and shipment. The container assembly shall be fabricated and assembled in accordance with the requirements specified herein and Figures 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10.

3.2 First article testing.- Requirements for submission of first article samples for testing shall be as specified in the contract.

3.3 Material.- Material used for forming container shells shall be pressed laminated sheets formed of polymers or blends of polymers, produced from acrylonitrile-butadiene-styrene. The material shall not be adulterated, extended, or in any way modified with materials other than pigments which shall not exceed 5% by weight exclusive of pigments. Materials used for processing into pressed laminated sheets shall be virgin stock. Certification of materials of each lot procured for production requirements shall be available to the Government. The property values shall meet the minimum requirements specified in Table I.

TABLE I

DETAIL REQUIREMENTS FOR RIGID ABS PLASTICS

	ASTM METHOD*	
Tensile strength, min. psi	D638	3,500
Modulus of elasticity in tension, min. psi	D638	160,000
Rockwell hardness ("R" scale), min.	D785	80
Heat deflection, temperature under load, min. (264 psi, fiber stress)	D648	180°F
Impact strength (izod), min. ft. lb. per inch of notch	D256, Method A	
23° ± 2°C (73.4° ± 3.6°F)		5.5
-40° ± 2°C (-40° ± 3.6°F)		2.0
Specific gravity	D792, Method A	
Min.		1.0
Max.		1.2
Chemical resistance 40 hour immersion in heptane 23° ± 2°C weight change, max. percent	D543	5.0

*These designations refer to the following methods of the American Society of Testing Materials:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

D256 Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543 Test for Resistance of Plastics to Chemical Reagents
D638 Test for Tensile Properties of Plastics
D648 Test for Deflection Temperature of Plastics Under Load
D785 Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792 Tests for Specific Gravity and Density of Plastics

3.3.1 Color.- Material for forming container shells shall be olive drab conforming to Color X24087 of FED-STD-595. Color match comparison shall be made on the smooth surface. A material swatch shall be submitted for approval prior to production.

3.3.2 Finish.- Finish for container shells shall be a commercial hair cell grain on the exterior surface and a hair cell or smooth surface on the interior surface.

3.3.3 Fungus resistance.- The material used for forming container shells shall show no evidence of damage, deterioration or profuse growth following an incubation period of 28 days after inoculation of surfaces with a mixed spore suspension.

3.4 Shell forming process.- Container shells shown on Figures 3 and 4 shall be thermo formed by any proven method normally associated with the plastic industry. Finished formed parts shall be entirely free of blisters, blemishes with no vacuum vent or thermo shock stress marks visible on outside surfaces of formed piece.

3.5 Fabrication.

3.5.1 Extrusion edge assemblies.- The upper extrusion edge (female), Drawing B10539157 and the lower extrusion edge (male), Drawing B10539158 shall be formed in one continuous operation by proven forming techniques and controlled tooling to provide uniformity of alignment, flatness and shall fit freely in each other when container is closed. The formed extrusions shall be free of chatter, tool marks and distortions. The extrusions shall be joined by butt welding or brazing and shall be ground smooth and exhibit soundness of good practices in accordance with MIL-W-6604 or MIL-B-23362 (see Figure 5).

3.5.1.1 Finish.- Prior to assembly to container shells, the extrusion edge assemblies shall be treated by finish 7.3, followed by finish 21.3 of MIL-STD-171, Color X24087 of FED-STD-595.

3.5.1.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the container shells with an air curable two part epoxy adhesive conforming to MMM-A-132, Type I, Class 3, applied in a manner to provide structural integrity and a pressure and watertight joint. Accelerated cure by heating shall not exceed 145 ± 5°F, for a period of 5 hours. The extrusion edge assemblies shall be tool rolled and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

crimped around the periphery to assure positive attachment to container shells.

3.5.2 Clamp assemblies.- Eight (8) clamp assemblies conforming to Part Number 10539217-2 shall be attached to lower extrusion edge as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2. Touch up shall be accomplished with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.5.3 Handles.- Two (2) handles, conforming to Part Number 10539216-2 shall be attached to lower extrusion edge, at each end of the container as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2. Touch up shall be accomplished with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.5.4 Sealing gasket.- Gasket shall be fabricated from neoprene rubber conforming to MIL-R-3065, Class SC, Grade 412 ANFFK, .265 O.D. by .156 I.D. The gasket shall be formed by molding, vulcanizing or by butt bonding. Butt bonding shall be accomplished with adhesive conforming to MIL-A-5092, Type II. Prior to inserting the gasket in the female extrusion edge, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied within the well. There shall be no evidence of excess adhesive in the gasket well. The gasket shall be surface treated with a soft film silicone compound conforming to MIL-C-21567.

3.5.5 Card holders.- Two (2) card holders shall be assembled to the front side of the assembled container as shown on Figure 1. The card holders shall conform to Part Numbers 8215734-1 and 8215734-2. Each card holder shall be secured in position with seven (7) rivets conforming to MS 16535-115.

3.5.6 Relief valve.- A two way automatic pressure relief valve conforming to Drawing A10539222 shall be installed on the cover as shown on Figure 1.

3.5.6.1 Valve instruction plate.- Valve instruction plate conforming to Drawing A10533221 shall be installed adjacent to relief valve as shown on Figure 1.

3.6 Interior arrangement.

3.6.1 Cushion inserts.- Two (2) interchangeable cushion inserts, fabricated from a combination of polyurethane-polyethylene foam cushioning material, shall be bonded within the container as specified in Figure 1. The cushions shall be fabricated as shown on Figure 6. Polyurethane foam shall be 1.8 lbs/cubic foot density, conforming to MIL-P-26514, Type I, Class 2, Color Charcoal Gray. Polyethylene foam shall conform to MIL-C-46842, Color Charcoal Gray.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:21Z
Check the source to verify that this is the current version before use.

3.7 Marking.- Marking characters shall be upper case, vertical gothic without serifs and shall be applied by silk screen or stencil system 21.1 of MIL-STD-171, Color 17875 of FED-STD-595 (see Figure 1).

3.8 Performance.

3.8.1 External components.- External components and assemblies such as latches, handles, shall be correctly positioned, firmly secured and function without interference.

3.8.2 Cover assembly.- The cover shall align properly with container body and shall be opened or closed without interference.

3.9 Environmental.

3.9.1 Impact resistance (ambient temperature).- The container assembly with dummy load within cushion cavity, shall show no evidence of cracking, chipping or delamination when dropped from a height of 30 inches. The container assembly shall then be tested for being pressure and watertight.

3.9.2 Impact resistance (low temperature).- The container assembly shall show no evidence of cracking or fracture when subjected to low temperature conditioning at -40°F followed by drop test from a height of 24 inches. The container shall then be tested for being pressure and watertight after the container is conditioned at ambient temperatures.

3.9.3 Operating temperature.- Containers shall meet functional requirements of 3.8 while exposed and thermally stabilized at ambient temperatures of plus 150 degrees and minus 40 degrees Fahrenheit.

3.9.4 Pressure tight.- The containers shall be capable of maintaining a positive pressure of 1 psi without loss of pressure for a period of 5 minutes.

3.9.5 Watertight.- The containers shall be capable of maintaining a watertight closure when submerged under a head of 3 feet of water for a period of two (2) hours.

3.10 Workmanship.- Containers fabricated to the requirements of this specification, shall be in accordance with proven forming techniques and shall be free of defects that might affect strength, serviceability and protection of contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article testing.- When the contract specifies testing of preproduction or initial production samples, the following paragraphs shall apply as applicable.

4.2.1 Preproduction test.- When specified in the contract, one preproduction sample shall be submitted to the procuring agency for approval of design and construction features. Preproduction sample shall meet all inspection provisions of 4.3 and 4.6 as well as any additional tests that may be specified in the contract.

4.2.2 Initial production test.- Initial production test sample shall be submitted in accordance with contract requirements. Unless otherwise specified in the contract, sample shall be the first production unit and shall have been manufactured using the same materials, processes and procedures as will be used in regular production. Initial production testing shall be in accordance with 4.3, 4.4, and 4.6 and shall be witnessed by the Government representative for all examinations and tests. The Government reserves the right to conduct any or all examinations or tests as may be deemed necessary.

4.2.3 First article disapproval.- Failure of any one of a first article sample submitted shall be cause for disapproval by the Government and subsequent action as required by the contract clauses applicable to first article testing.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926, and the Supplementary Quality Assurance Provisions (SQAP) listed in the List of Inspection Documents (IEL) when provided with the technical data package (TDP). Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105, and the sampling plans specified in Table II. Examinations and tests for Packaging, Packing and Marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

TABLE II - CLASSIFICATION OF DEFECTS

CLASS	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
CRITICAL: NONE			
MAJOR: AQL 1.0% Defective			
101.	Improper forming	3.4	Visual, SME
102.	Edge extrusions improperly formed welded, or brazed	3.5.1	Visual
103.	Extrusion edge assemblies improperly finished	3.5.1.1	Visual
104.	Improper bonding of extrusion edge assemblies, improper epoxy adhesive, extrusion edge not rolled or crimped	3.5.1.2	Visual
105.	Improper clamps or assembly to containers	3.5.2	Visual
106.	Improper handles or assembly to containers	3.5.3	Visual
107.	Improper gasket or improperly bonded to extrusion edge assembly	3.5.4	Visual
108.	Improper card holders, card holders improperly attached to container	3.5.5	Visual
109.	Improper relief valve, valve installed improperly	3.5.6	Visual
110.	Incorrect instruction plate	3.5.6.1	Visual
111.	Cushion inserts improperly fabricated	3.6.1	Visual, SME
112.	Cushion inserts improperly bonded within container	3.6.1 and Figure 1	Visual
113.	Marking incorrectly applied or missing	3.7	Visual
MINOR: AQL 4.0% Defective			
201.	Color match	3.3.1	Visual
202.	Improper finish	3.3.2	Visual
203.	Excess adhesive on gasket	3.5.4	Visual

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.3.4 Certification.- Certification shall include test data and results for all characteristics specified below. Certification will be required prior to performing final acceptance inspection and shall suffice for the remainder of the production quantities, provided the manufacturing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

Part Number [illegible] shall be attached to lower extrusion edge as

processes and techniques used to produce the items for which certification was issued have not been changed or revised. Any and all changes will require a new certification from the contractor.

NO.	CHARACTERISTIC	TEST DATE TO COMPLY WITH
301.	Material	3.3

4.4 Special sampling.

4.4.1 General.- One container shall be selected at random as a special sampling from each 100 produced, or from each month's production, whichever occurs first. The sample shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

TEST	REQUIREMENT	TEST PROCEDURE
401. Fabrication	3.3 - 3.7	Container assembly - SME, Visual, Figure 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10
402. Workmanship	3.10	Visual

4.4.2 Environmental and functional.- Two containers shall be selected at random as samples from each 100 produced, or from each month's production whichever occurs first. The samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

CONTROL TEST	REQUIREMENT	TEST PROCEDURE
403. Impact resistance	3.9.1	4.6.2
404. Pressure tight	3.9.4	4.6.5
405. Watertight	3.9.5	4.6.6
406. Performance	3.8.1, 3.8.2	4.7

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specification or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL), when provided with the Technical Data Package (TDP).

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.6 Test methods and procedures.

4.6.1 Preparation for tests.- The container assembly shall be fitted with a dummy load having a mass of 8-3/4 by 8 by 4, weighing 15 pounds.

4.6.1.1 The relief valve shall be removed during all environmental testing of sample containers.

4.6.2 Impact resistance (ambient temperature).- The sample container fitted with dummy load shall be subjected to a 30 inch free fall flat drop, once on the top and once on the bottom onto a steel or concrete surface. Following the tests, the container shall be subjected to a pressure and watertight test specified in 4.6.5 and 4.6.6.

4.6.2.1 Results of test.- The container assembly shall be examined and there shall be no evidence of chipping, cracking or delamination.

4.6.3 Impact resistance (low temperature).- The first article sample container fitted with dummy load shall be placed in a chamber and the container and contents shall be stabilized at -40°F for a period of 4 hours. The container shall be immediately subjected to a 24 inch free fall flat drop, once on the top and once on the bottom onto a steel or concrete surface. Following the drop test, the container shall be allowed to return to an ambient temperature condition after which pressure and watertight tests specified in 4.6.5 and 4.6.6 shall be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.6.3.1 Results of test.- The container assembly shall be examined and there shall be no evidence of chipping, cracking or delamination.

4.6.4 Operating temperature.- The operating temperature test consists of exposing the container to the temperatures indicated in 3.9.3 by means of equipment complying with the requirements of 4.5.2.2. The test shall be conducted in accordance with Procedure II of Specification MIL-F-13926, and the temperature conditions of 3.9.3 shall apply. While exposed to these temperatures, the container shall meet the requirements specified in 3.8.1 and 3.8.2. The operability test shall be conducted on the first article sample only.

4.6.5 Pressure test.- All container assemblies shall have the relief valve removed and replaced by an appropriate plug. A suitable connection shall be made for the introduction of air pressure. A gage shall be connected to indicate pressure within the container. Air pressure shall be applied up to 1 pound per square inch and the intake valve closed to retain pressure. A soap solution shall be applied to all joints, seams and welds. There shall be no evidence of leakage. After five minutes the gage shall be observed to make sure that the original pressure has been maintained.

4.6.6 Watertight.- All container assemblies shall be tested as follows:

The container assembly with relief valve removed, and aperture sealed with gasketed fitting, shall be submerged in a vessel, under a head of 3 feet of water in accordance with MIL-STD-108, Table III, Method b. The container assembly shall be submerged for a period of 2 hours. The container shall be thoroughly dried externally prior to removal of cover. There shall be no evidence of water penetration.

4.6.7 Fungus resistance.- Tests shall conform to fungus resistance test, Procedure I of MIL-E-5272. Sample material shall be minimum of one square foot. At the completion of the test period, any signs of damage, deterioration or profuse growth shall constitute cause for rejection. The fungus test shall not be required for suppliers having qualified by certification that their material has been tested by above procedure and is fungus resistant.

4.7 Performance.

4.7.1 External components.- Operability of these devices shall be checked by a functional and visual examination when engaged and disengaged a minimum of 5 times to determine compliance with the requirements specified in 3.8.1.

4.7.2 Cover assembly.- The cover shall be operable as specified in 3.8.2 when subjected to a functional examination by opening and closing the container at least five times and subsequently visually examining the components for defects or poor workmanship.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing.- Unless otherwise specified, the containers shall be prepared for shipment using normal commercial methods, or materials to assure acceptance by common or other carrier for safe transportation at the lowest rate to point of destination.

5.2 Marking.- Marking for shipment shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The container assembly defined herein, is suitable for all types of shipment and storage. The container constitutes the unit package and shipping container as specified in MIL-P-14232/P10526600.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Applicable stock number.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A236Y

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the current version before use.




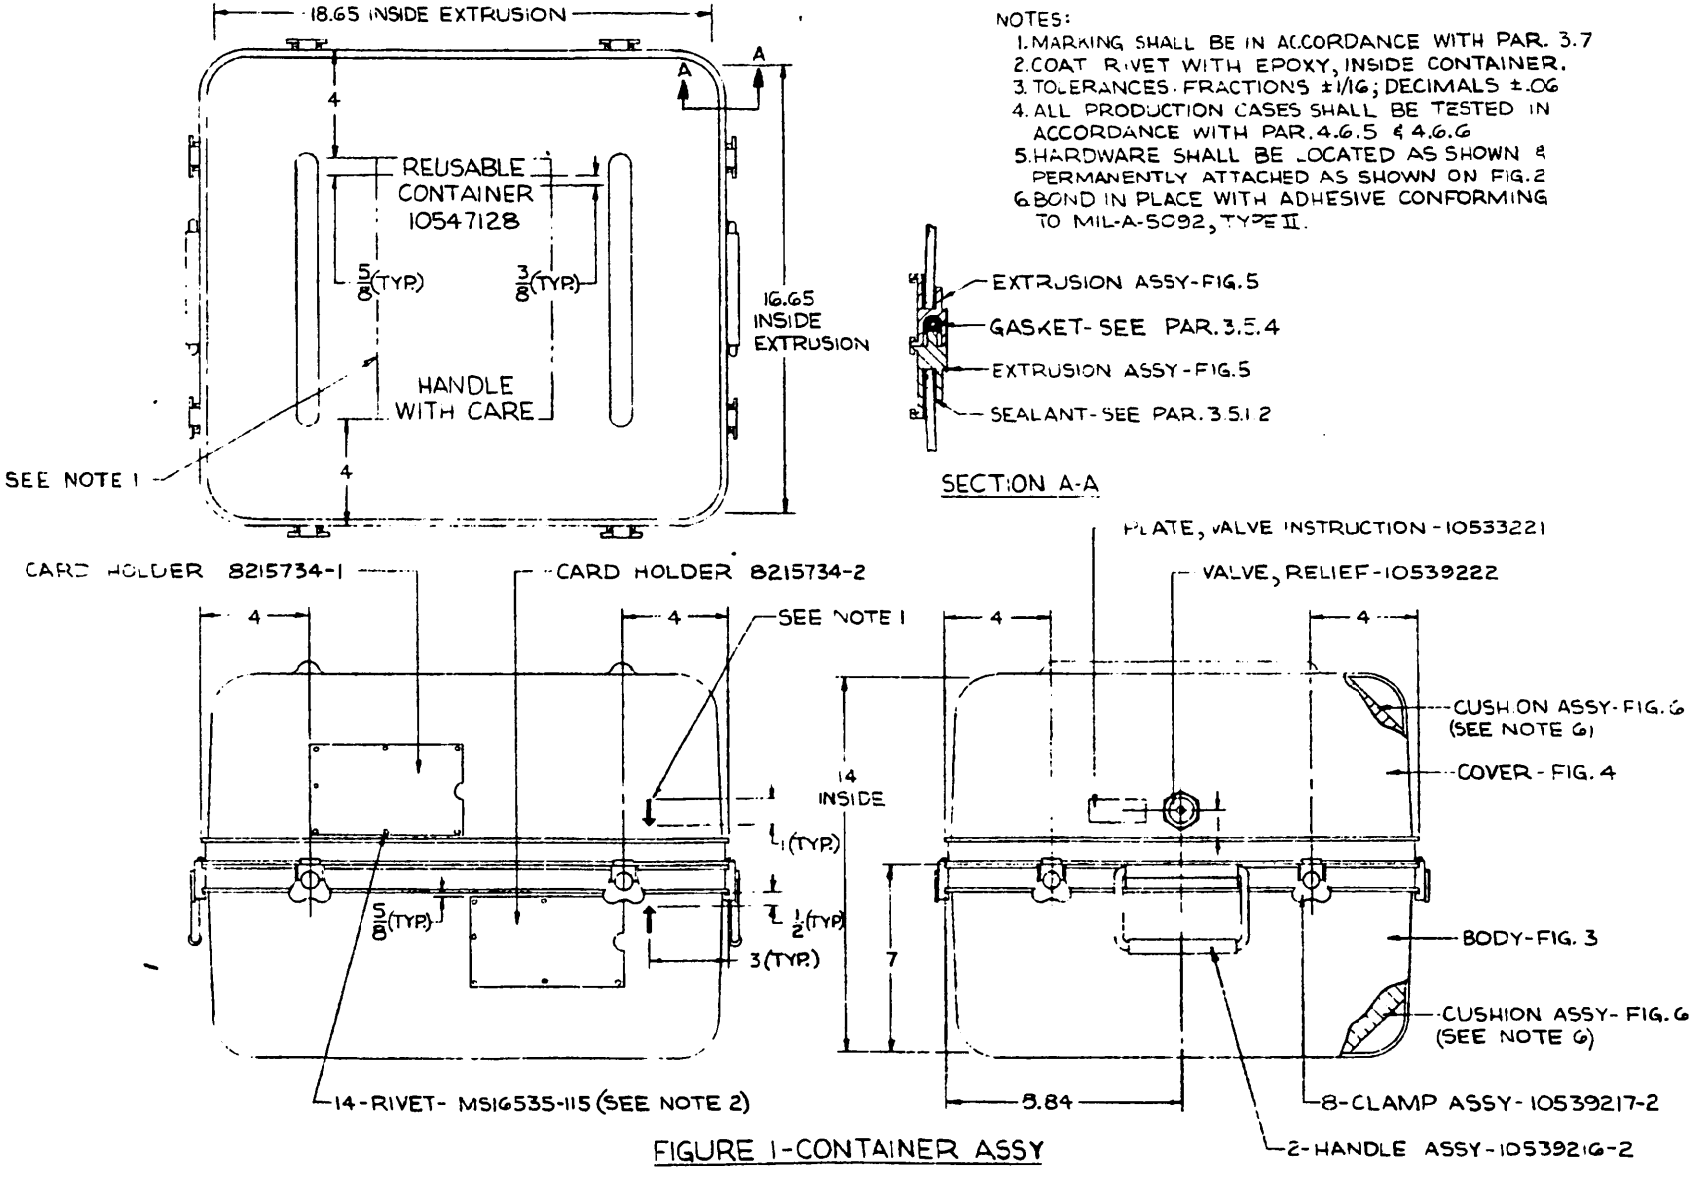



FIGURE 1-CONTAINER ASSY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

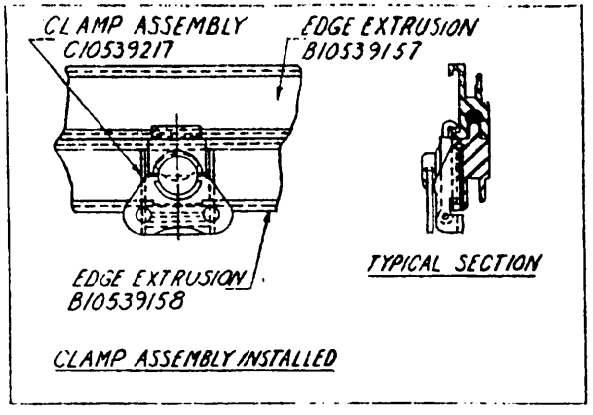

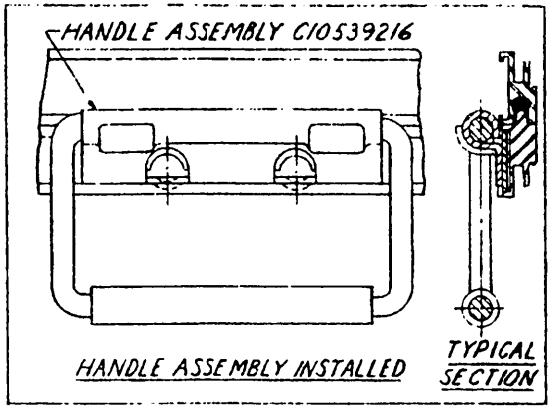

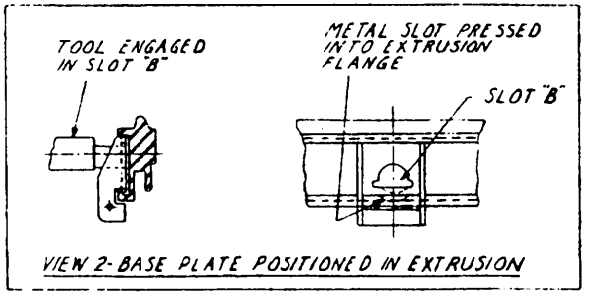

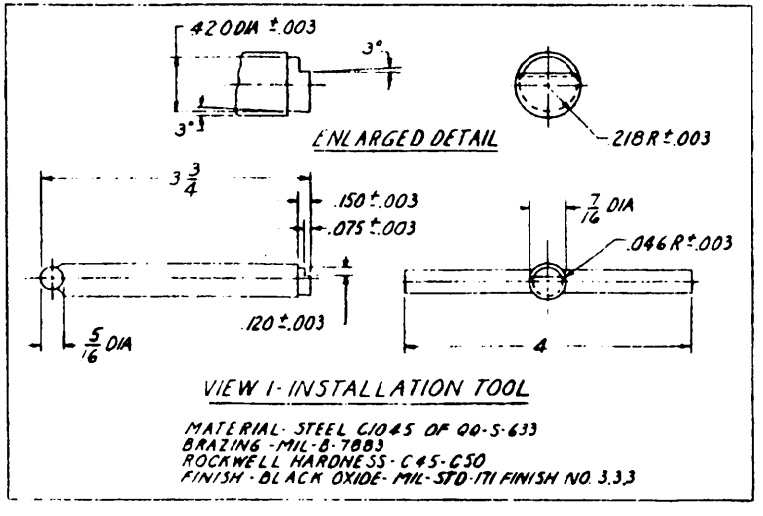


INSTALLATION PROCEDURE

1. LOCATE CLAMP AND HANDLE ASSEMBLIES AS REQUIRED, IN POSITION AS SHOWN ON FIGURE 1.
2. POSITION BASE PLATE IN EXTRUSION FLANGE.
3. ENGAGE INSTALLATION TOOL (VIEW 1) INTO SLOT "B" AS SHOWN IN VIEW 2.
4. FIRMLY PRESS TOOL DOWNWARD AND TURN TOOL 90° TO THE RIGHT AND 90° TO THE LEFT TO DEFORM SLOT OF BASE PLATE IN EXTRUSION FLANGE AS SHOWN IN VIEW 2.

FIGURE 2- INSTALLATION OF HARDWARE

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:21Z
Check the source to verify that this is the current version before use.

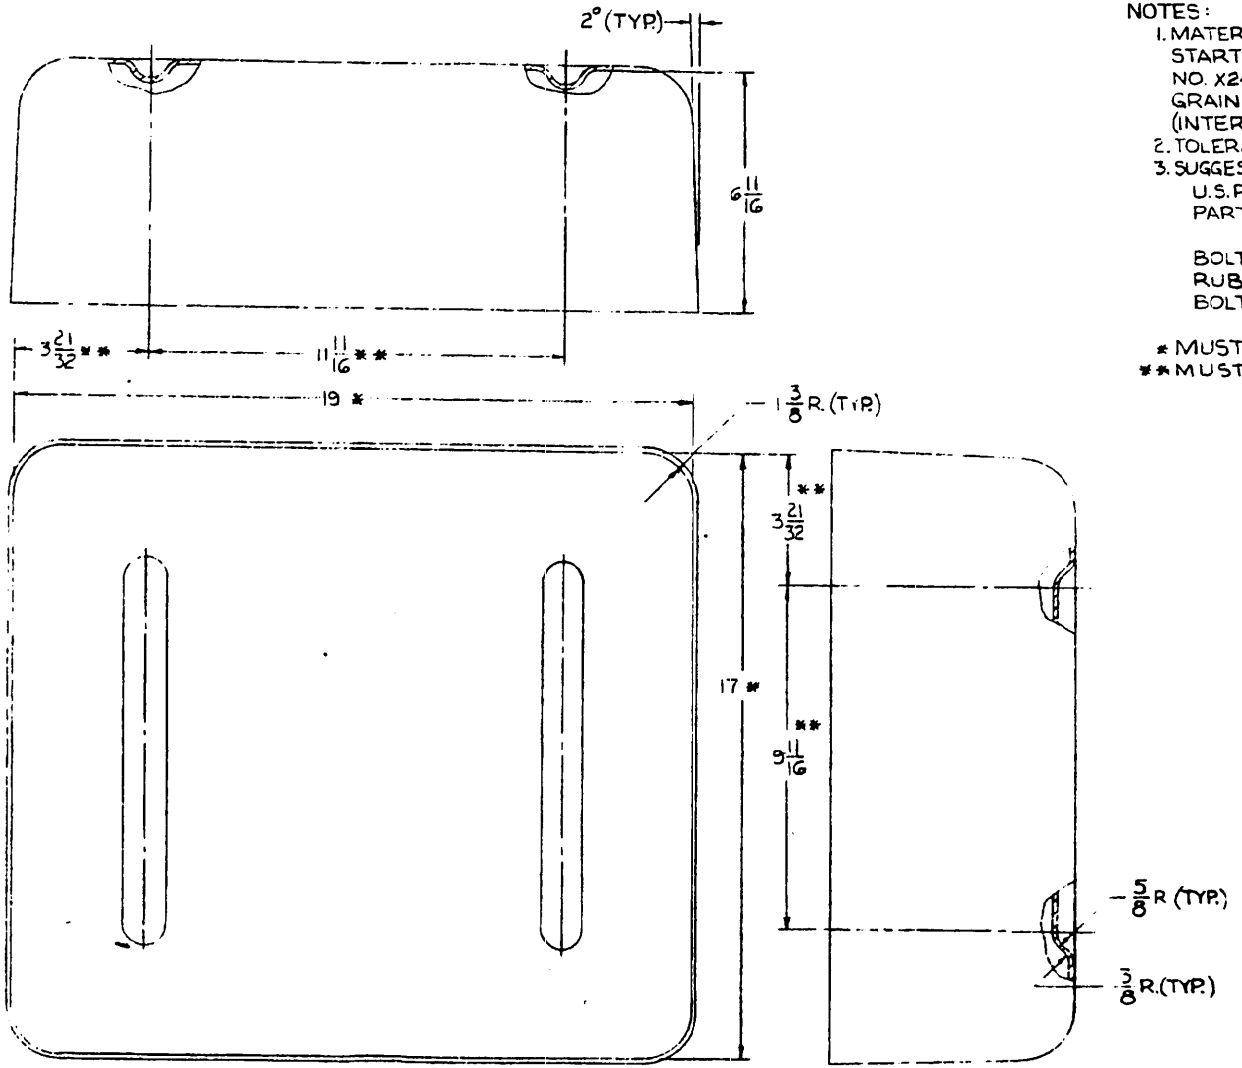


NOTES:

1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3 STARTING THICKNESS- .187; COLOR-OLIVE DRAB-NO. X24087 OF FED-STD-595; FINISH-HAIRCELL GRAIN (EXTERIOR), HAIRCELL GRAIN OR SMOOTH (INTERIOR); FORMED WALL THICKNESS- .130±.020
2. TOLERANCES: FRACTIONS ±1/32, ANGLES ±1°
3. SUGGESTED MATERIAL SOURCES:
   U.S. RUBBER CO., CHICAGO, ILL.
   PART NO. R40-4313-CPA1492
   OR
   BOLTA PRODUCTS DIV. OF GENERAL TIRE & RUBBER CO., LAWRENCE, MASS.
   BOLTARON SERIES 6000-X4451

* MUST MATCH COVER-FIG. 4
** MUST MATE WITH COVER-FIG. 4

FIGURE 3-BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

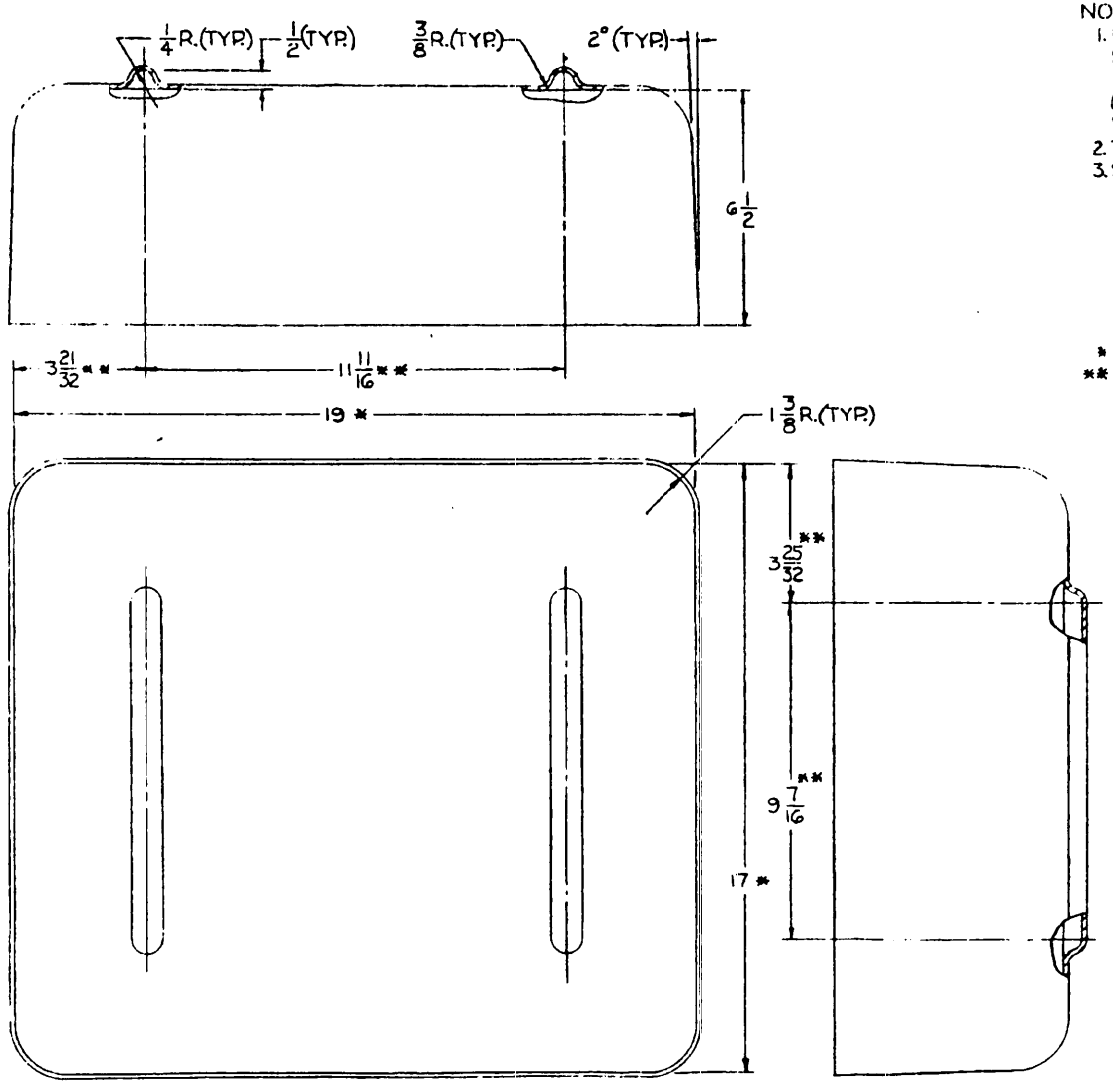


NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3 STARTING THICKNESS - .187; COLOR OLIVE DRAB - NO. X24087 OF FED-STD-595; FINISH - HAIRCELL GRAIN (EXTERIOR), HAIRCELL GRAIN OR SMOOTH (INTERIOR); FORMED WALL THICKNESS - .130 ±.020
2. TOLERANCES - FRACTIONS ±1/32, ANGLES ±1°
3. SUGGESTED MATERIAL SOURCES:
   U.S. RUBBER CO., CHICAGO, ILL.
   PART NO. R40-4313-CPA 1492
   OR
   BOLTA PRODUCTS DIV. OF GENERAL TIRE & RUBBER CO., LAWRENCE, MASS.
   BOLTARON SERIES 6000-X4451


* MUST MATCH BODY-FIG. 3
** MUST MATE WITH BODY-FIG. 3

FIGURE 4 - COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES
1 COMPLETED ASSEMBLIES SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN SECTION A-A
2 MUST MATCH SHELLS SHOWN ON FIGURES 3 AND 4
3 EDGE FRAMES SHALL BE FORMED, WELDED, AND FINISHED IN ACCORDANCE WITH PAR. 3.5.1 AND 3.5.1.1

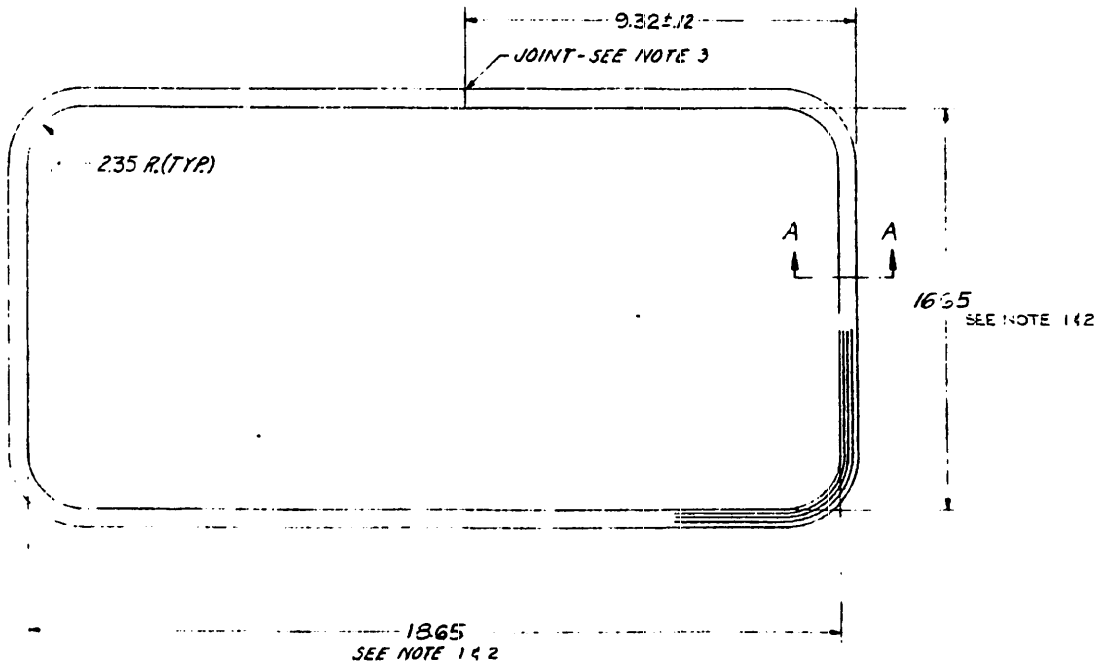

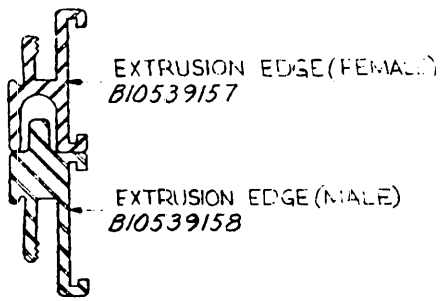

SECTION A-A

FIGURE 5 - EXTRUSION EDGE ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTE:
1. CUSHIONS SHALL BE BONDED WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II.

FIGURE 6-CUSHION ASSY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-POLYURETHANE, POLYETHER FORMULATION CONFORMING TO MIL-P-26514, TYPE I, CLASS 2; 1.8 LBS/CU.FT. DENSITY; COLOR-CHARCOAL GRAY.
2. TOLERANCES-FRACTIONS ±1/16, ANGLES ±5°

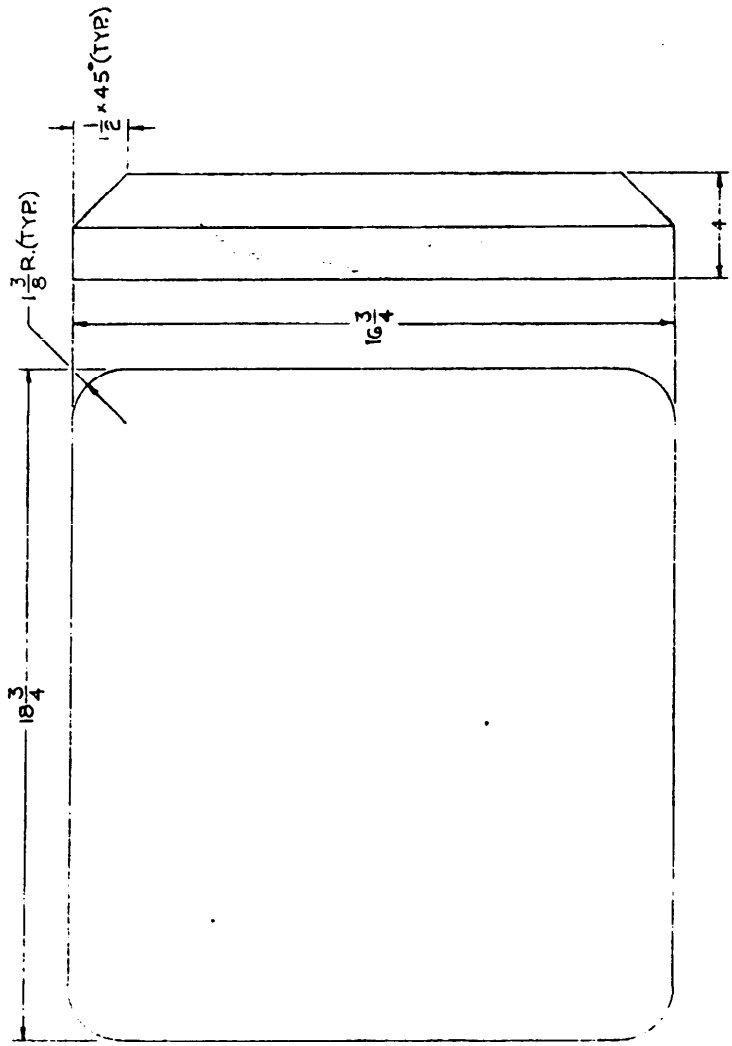


FIGURE 7-CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-POLYURETHANE, POLYETHER FORMULATION CONFORMING TO MIL-P-26514, TYPE I, CLASS 2; DENSITY-1.8 LBS/CU.FT.; COLOR-CHARCOAL GRAY
2. TOLERANCES-FRACTIONS ±1/16

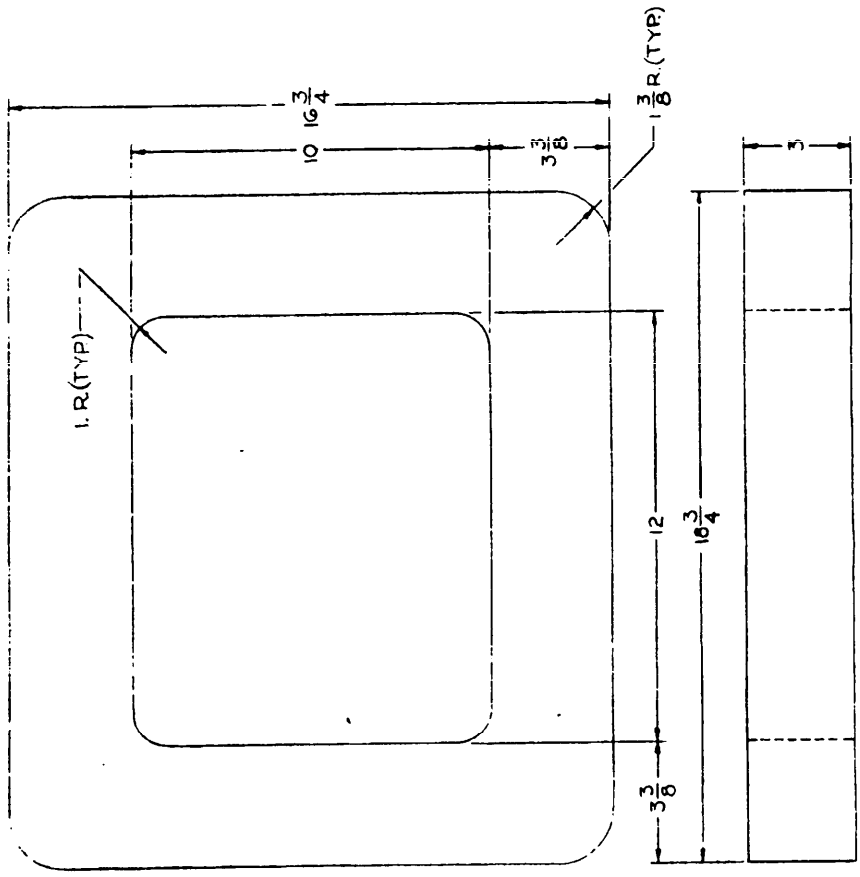


FIGURE 8-CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-POLYETHYLENE FOAM, CONFORMING TO MIL-C-4G842; COLOR-CHARCOAL GRAY
2. TOLERANCES-FRACTIONS ±1/16

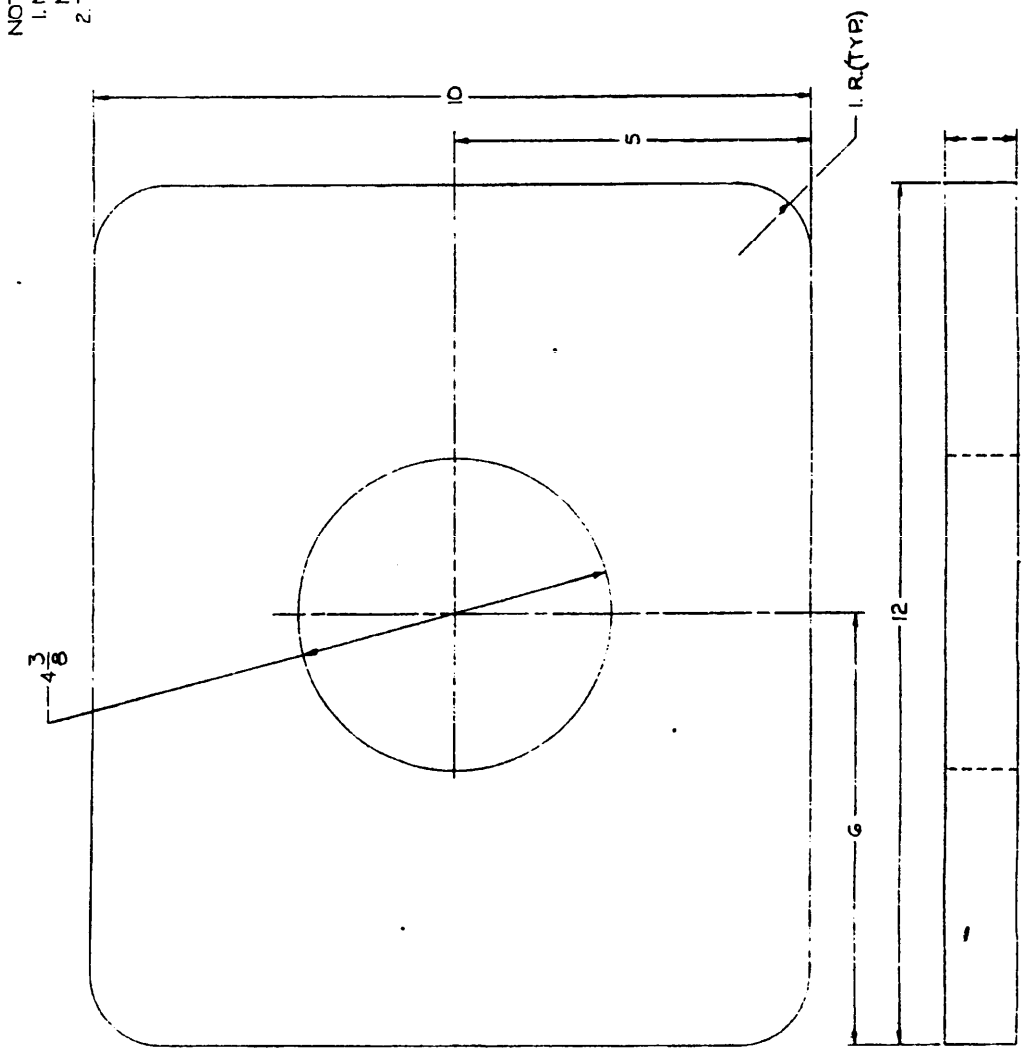


FIGURE 9-CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-POLYETHYLENE FOAM CONFORMING TO MIL-C-46842; COLOR-CHARCOAL GRAY
2. TOLERANCES-FRACTIONS ± 1/16

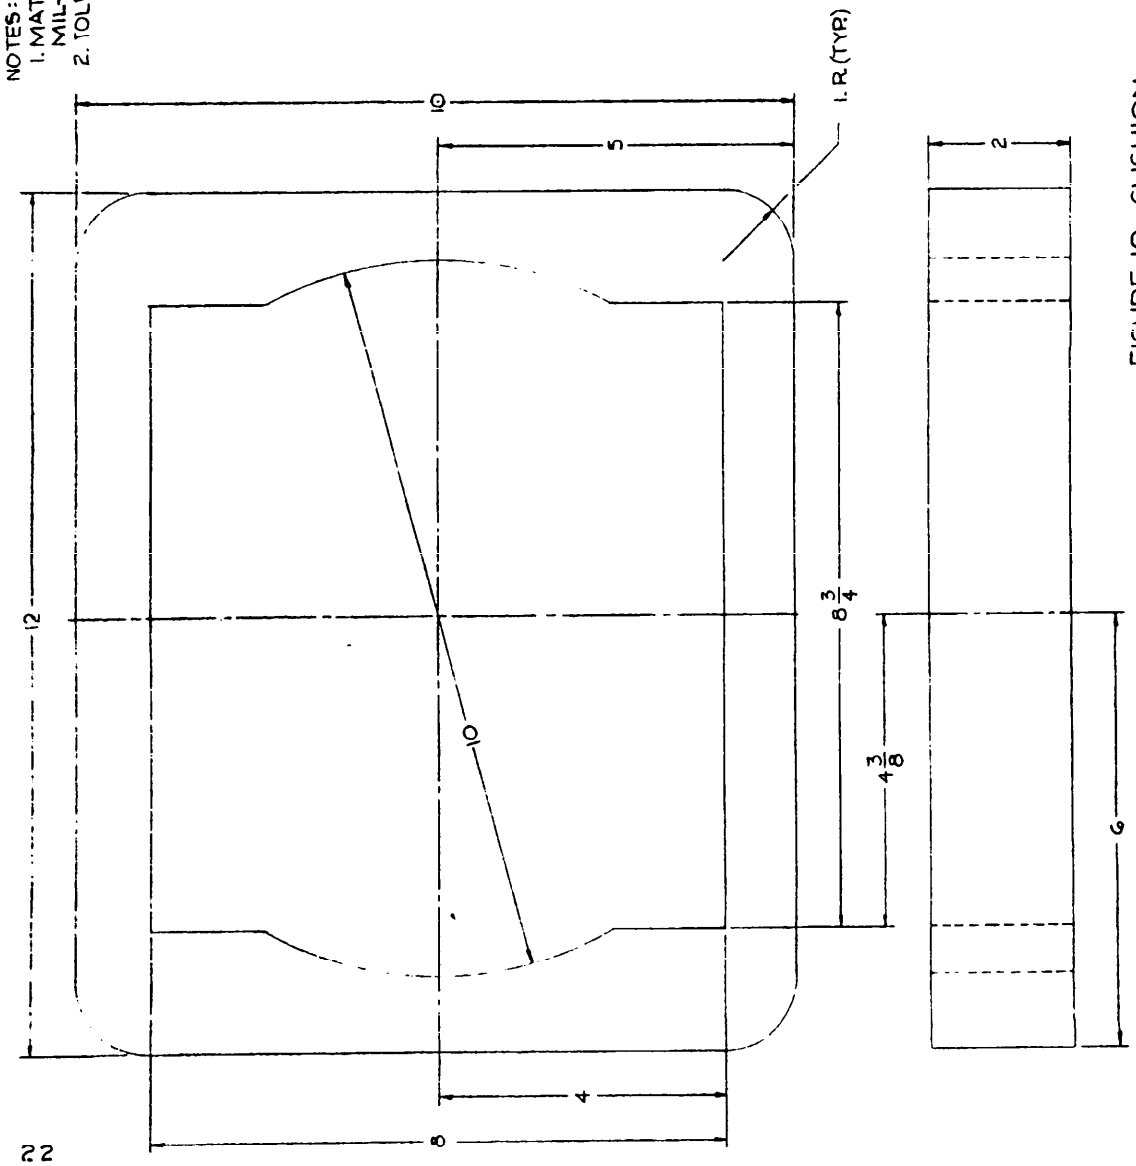


FIGURE 10-CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD, FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-8278

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES
NAVY DEPARTMEN

OFFICIAL BUSINESS

COMMANDING OFFICER
FRANDFORD ARSENAL
ATTN: SMUFA-N1100
PHILADELPHIA, PA. 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the currentversion before use.