MILITARY SPECIFICATION

CASE, CARRYING: 10543310

1. SCOPE

1.1 This specification covers the fabrication and testing of one type carrying case for fuze setter sets (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

TT-E-529	Enamel, Alkyd, Semi-Gloss

Military

MIL-A-5092	Adhesive, Rubber Base, General Purpose
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-W-8604	Welding of Aluminum Alloys, Process For
MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection Of
MIL-P-14232	Parts, Equipment, and Tools for Ordnance Materiel; Packaging of
MIL-C-21567	Compound, Silicone, Soft Film
MIL-B-23362	Brazing of Aluminum, and Aluminum Alloys
MIL-I-45607	Inspection Equipment, Supply and Maintenance Of
MIL-C-46842	Cushioning Material, Unicellular Polyethylene Foam (For Packaging Purposes)

STANDARDS

Federal

FED-STD-595	Colors

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-108	Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-171	Finishing of Metal and Wood Surfaces
MS-15795	Washers, Flat-Metal, Round, General Purpose
MS-16535	Rivet, Tubular Oval Head

DRAWINGS

U.S. Army, Frankford Arsenal

A8268711	Body
A10543310	Case, Carrying: 10543310
A10555898	Plate
A10555906	Primer, Silicone Adhesive
B8644392	Packing, Preformed
B10553445	Clamp Assembly
B10553999	Extrusion (Female)
B10554000	Extrusion (Male)
B10555903	Plate
B10555904	Adhesive, Silicone
C10543309	Hinge Assembly
C10550000	Handle Assembly

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from procuring activity or as indicated by contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American Society of Testing Materials

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Test for Specific Gravity and Density of Plastics

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society of Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

3. REQUIREMENTS

3.1 General.- The carrying case shall be fabricated in accordance with the requirements specified herein and Figures 1, 1A, 2, 3, 4, 5 and 6, to provide a lightweight watertight case with provisions for containing the fuze setter and associated equipment.

3.2 Material.- Material used for forming case shells shall be extruded or pressed laminated sheets formed of polymers or blends of polymers, produced from acrylonitrile-butadiene-styrene. The material shall not be adulterated, extended, or in any way modified with materials other than pigments which shall not exceed 5% by weight exclusive of pigments. Materials used shall be virgin stock and shall be capable of passing the fungus resistance requirements specified in 3.2.3. Certification of materials of each lot procured for production requirements shall be available to the Government. The property values shall meet the minimum requirements specified in Table I.

TABLE I

REQUIREMENTS FOR ABS PLASTIC SHEET

	ASTM METHOD*	
Tensile strength, Min. psi	D638	3,500
Modulus of elasticity in tension, min. psi	D638	160,000
Rockwell hardness ("R" scale), Min.	D785	80
Heat deflection, temperature under load, min. (264 psi, fiber stress)	D648	180°F
Impact strength (izod), Min. ft. lb. per inch of notch	D256 Method A	
23° ± 2°C (73.4° ± 3.6°F)		5.5
-40° ± 2°C (-40° ± 3.6°F)		2.0
Specify gravity		
Min.	D792	1.0
Max.	Method A	1.2
Chemical resistance 40 hour immersion in heptane 23° ± 2°C weight change, max. percent	D543	5.0

*These designations refer to the following methods of the American Society of Testing Materials:

D256 Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543 Test for Resistance of Plastics to Chemical Reagents
D638 Test for Tensile Properties of Plastics
D648 Test for Deflection Temperature of Plastics Under Load
D785 Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792 Tests for Specific Gravity and Density of Plastics

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

3.2.1 Color.- Material for forming case shells shall be olive drab conforming to Color X24087 of FED-STD-595. Color match comparison shall be made on the smooth surface. A material swatch shall be submitted for approval prior to production.

3.2.2 Finish.- Material for case shells shall have a hair cell grain on the exterior surface and a smooth surface on the interior surface.

3.2.3 Fungus resistance.- The material used for forming the case shells shall show no evidence of damage, deterioration or profuse growth following an incubation period of 28 days after inoculation of surfaces with a mixed spore suspension, when tested in accordance with Procedure I of MIL-E-5272.

3.3 Case forming process.- Case shells shown on Figures 2 and 3 shall be thermo-formed by any proven method normally associated with the plastic industry. Finished formed parts shall be entirely free of blisters, blemishes, or thermo shock stress marks.

3.4 Fabrication.

3.4.1 Extrusion edge assemblies.- The upper extrusion edge (female) Drawing B10553999 and the lower extrusion edge (male) Drawing B10554000 shall be formed in one continuous operation by proven forming techniques and controlled tooling to provide uniformity of alignment, flatness and shall fit freely in each other when case is closed. The formed extrusions shall be free of chatter, tool marks and distortions. The extrusions shall be joined by butt welding or brazing and shall be ground smooth and exhibit soundness of good practices in accordance with MIL-W-8604 and MIL-B-23362 (see Figure 4).

3.4.1.1 Finish.- Prior to assembly to case shells, the extrusion edge assemblies shall be treated by finish 7.3, followed by finish 21.3 of MIL-STD-171, Color X24087 of FED-STD-595.

3.4.1.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the case shells with an air curable adhesive sealant, conforming to Drawing B10555904 with a primer conforming to Drawing A10555906. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and water-tight joints.

3.4.2 Clamp assemblies.- Two (2) clamp assemblies conforming to Drawing B10553445, shall be painted in accordance with finish 21.3 of MIL-STD-171, Color X24087 of FED-STD-595. The clamps shall provide compression in sealing gasket to maintain water-tight closure. The clamps shall be attached to the case assembly with four (4) rivets conforming to MS-16535-118 and two (2) backing plates, Drawing A10555898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

as shown on Figure 1. Manufactured heads of rivets shall be on the exterior of the case. Rivet heads shall be touched up with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.4.3 Handle.- One (1) handle conforming to Drawing C10550000 shall be attached to the case assembly as shown on Figure 1 with three (3) rivets conforming to MS-16535-298 and three (3) washers conforming to MS-15795-804. Manufactured heads of rivets shall be on the exterior of the case. Rivet heads shall be touched up with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.4.4 Hinges.- The body and the cover shall be attached by two (2) hinges conforming to Drawing C10543309 as shown on Figure 1, secured by twelve (12) rivets conforming to MS-16535-118 and four (4) backing plates, Drawing B10555903. Manufactured heads of rivets shall be on the exterior of the case. Rivet heads shall be touched up with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.4.5 Sealing gasket.- Gasket shall be fabricated of material conforming to Part No. 8644392-3. The gasket shall be formed by vulcanizing or butt bonding. Butt bonding shall be accomplished with adhesive conforming to MIL-A-5092, Type II. Prior to inserting the gasket in the female extrusion edge, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied within the well. There shall be no evidence of excess adhesive in the gasket well. The exposed gasket shall be surface treated with a soft film silicone compound conforming to MIL-C-21567.

3.5 Marking.- Marking legend shown on Figure 2 shall be depressed lettering.

3.6 Interior cushion inserts.

3.6.1 Lower cushion insert.- The lower cushion insert shall be fabricated as shown on Figure 6, of polyethylene foam conforming to MIL-C-46842, density 2 lbs/cubic foot, Color Charcoal.

3.6.1.1 The lower cushion insert shall be provided with two (2) plastic bodies, Drawing A8268711 as shown on Figure 1A.

3.6.2 Upper cushion insert.- The upper cushion insert shall be fabricated as shown on Figure 5, of polyethylene foam conforming to MIL-C-46842, density 2 lbs/cubic foot, Color Charcoal.

3.6.3 Bonding of cushion inserts.- Cushion inserts shall be bonded within the case as shown on Figure 1A. Bonding shall be with adhesive conforming to MIL-A-5092, Type II.

3.7 Performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

3.7.1 External components.- External components and assemblies such as latches, handles, shall be correctly positioned, firmly secured and function without interference.

3.7.2 Cover assembly.- The cover shall align properly with case body and shall be opened or closed without interference of mating extrusions.

3.8 Environmental.

3.8.1 Impact resistance (ambient temperature).- The case assembly with dummy loads within cushion cavity, shall show no evidence of cracking, chipping or delamination when dropped from a height of 30 inches. The case assembly shall then be tested for being watertight.

3.8.2 Operating temperature.- Cases shall meet functional requirements of 3.7 while exposed and thermally stabilized at ambient temperatures of plus 150 degrees and minus 65 degrees Fahrenheit.

3.8.3 Watertight.- Cases shall be capable of maintaining a watertight closure when submerged under a head of 3 feet of water for a period of two (2) hours.

3.9 Workmanship.- Cases fabricated to the requirements of this specification, shall be in accordance with proven commercial forming techniques and shall be free of defects that might affect strength, serviceability and protection of contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (preproduction) submission.- Prior to the beginning of regular production, the supplier shall submit preproduction samples to a Government approved facility for test and evaluation in accordance with the contract schedule. The samples shall consist of five (5) case assemblies. The samples shall be manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be the same as used for regular production and shall be obtained from the same

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

source of supply. After inspection and provisional acceptance at source, the preproduction samples shall be inspected at the Government approved facility for all requirements of drawings and specifications. The Government reserves the right to require new preproduction samples until such time as acceptable samples are submitted. Preproduction samples shall have successfully met all inspection provisions of Paragraphs 4.3 and 4.6.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105, and the sampling plans specified in Table II. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

TABLE II - CLASSIFICATION OF DEFECTS

CLASS CHARACTERISTIC CRITICAL: NONE MAJOR: AQL 1.0% defective	REQUIREMENT	TEST PROCEDURES
101. Improper forming of shells	3.3	Visual, SME
102. Edge extrusions improperly formed, welded, or brazed	3.4.1	Visual
103. Extrusion edge assemblies improperly finished	3.4.1.1	Visual
104. Improper bonding of extrusion edge assemblies, improper adhesive	3.4.1.2	Visual
105. Improper clamps or assembly to case	3.4.2	Visual
106. Improper handle or assembly to case	3.4.3	Visual
107. Improper gasket or improperly bonded to extrusion edge assembly	3.4.5	Visual
108. Improper hinges or assembly to case	3.4.4	Visual
109. Incorrect marking	3.5	Visual
110. Cushion inserts improperly fabricated	3.6.1, 3.6.2	Visual SME
111. Cushion inserts improperly bonded within case	3.6.3	Visual
112. Plastic body missing or improper	3.6.1.1	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

TABLE II - CLASSIFICATION OF DEFECTS (CONTINUED)

		REQUIREMENT	TEST PROCEDURES
MINOR:	AQL 4.0 defective		
201.	Color match	3.2.1	Visual
202.	Improper finish	3.2.2	Visual
203.	Excess adhesive on gasket	3.4.5	Visual

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.3.4 Certification.- Certification shall include test data and results for all characteristics specified below. Certification will be required prior to performing final acceptance inspection and shall suffice for the remainder of the production quantities, provided the manufacturing processes and techniques used to produce the items for which certification was issued have not been changed or revised. Any and all changes will require a new certification from the contractor.

NO.	CHARACTERISTIC	TEST DATA TO COMPLY WITH
301.	Material	3.2, 3.2.2 and 3.2.3

4.4 Special sampling.

4.4.1 General.- Four (4) case assemblies shall be selected at random as a special sampling from each 800 produced, or from each month's production, whichever occurs first. The samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

CONTROL TEST		REQUIREMENT	TEST PROCEDURE
401.	Fabrication	3.1 - 3.6.3	SME, Visual, Figures 1, 1A, 2, 3, 4, 5 and 6
402.	Workmanship	3.9	Visual

4.4.2 Environmental and functional.- Four (4) sample case assemblies shall be selected at random as samples from each 800 produced, or from each month's production whichever occurs first. The samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

CONTROL TEST		REQUIREMENT	TEST PROCEDURE
403.	Impact resistance	3.8.1	4.6.2
404.	Operating temperature	3.8.2	4.6.3
405.	Watertight	3.8.3	4.6.4
406.	Performance	3.7.1, 3.7.2	4.7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL), when provided with the Technical Data Package (TDP).

4.5.2.2 Contractor design.- The contractor shall make available inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.6 Test methods and procedures.

4.6.1 Preparation for tests.- The case assembly shall be fitted with dummy loads fabricated as shown on Figure 7.

4.6.2 Impact resistance (ambient temperature).- The sample case fitted with dummy loads shall be subjected to a 30 inch free fall, flat drop, once on the top and once on the bottom onto a steel or concrete surface. Following the test, the case shall be subjected to a watertight test specified in 4.6.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.6.2.1 Results of test.- The case assembly shall be examined and there shall be no evidence of chipping, cracking, delamination or water penetration.

4.6.3 Operating temperature.- The operating temperature test consists of exposing the case to the temperatures indicated in 3.8.2 by means of equipment complying with the requirements of 4.5.2.2. The test shall be conducted in accordance with Procedure II of Specification MIL-F-13926, and the temperature conditions of 3.8.2 shall apply. While exposed to these temperatures, the container shall meet the requirements specified in 3.7.1 and 3.7.2.

4.6.4 Watertight.- The case assembly shall be tested as follows:

The case assembly with latches secured, shall be submerged in a vessel, under a head of 3 feet of water in accordance with MIL-STD-108, Table III. The case assembly shall be submerged for a period of 2 hours. The case shall be thoroughly dried externally prior to opening of cover. There shall be no evidence of water penetration.

4.7 Performance.

4.7.1 External components.- Operability of these devices shall be checked by a functional and visual examination when engaged and disengaged a minimum of 5 times to determine compliance with the requirements specified in 3.7.1.

4.7.2 Cover assembly.- The cover shall be operable as specified in 3.7.2 when subjected to a functional examination by opening and closing the container at least five times and subsequently visually examining the components for defects or poor workmanship.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing.- Unless otherwise specified, the cases shall be prepared for shipment using normal commercial methods, or materials to assure acceptance by common or other carrier for safe transportation at the lowest rate to point of destination.

5.2 Marking.- Marking for shipment shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The carrying case is intended for, but not limited to, the Fuze Setter Set: M63.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Applicable stock number

Custodian:


Army - (AR)


Preparing activity:

Army - (AR)

Project No. 1290-A217

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

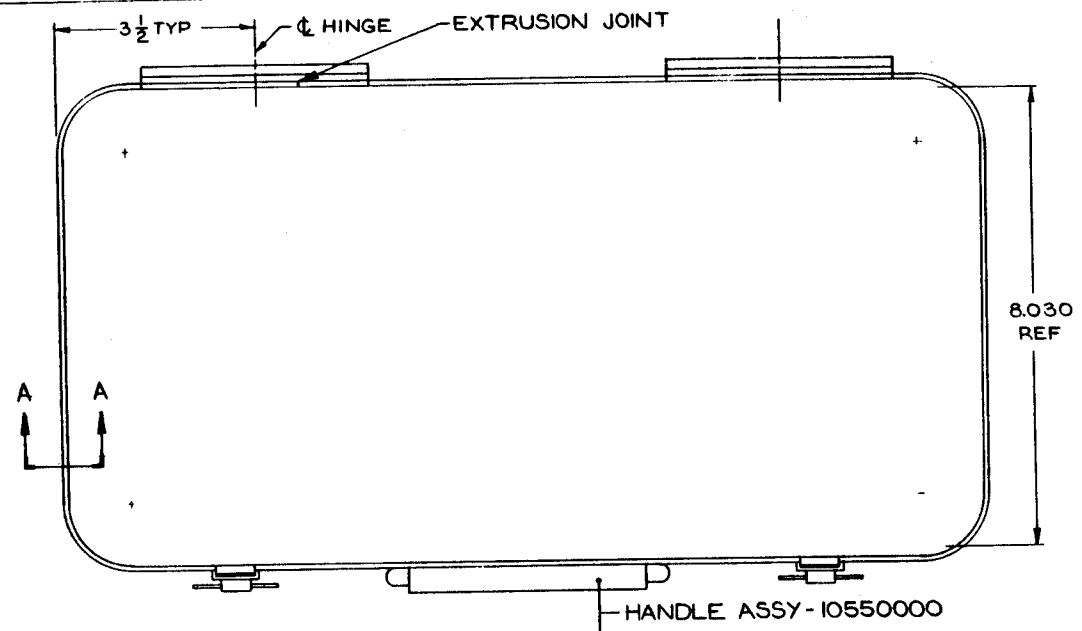

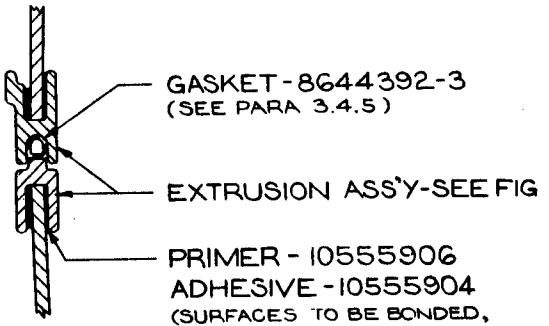

SECTION A-A

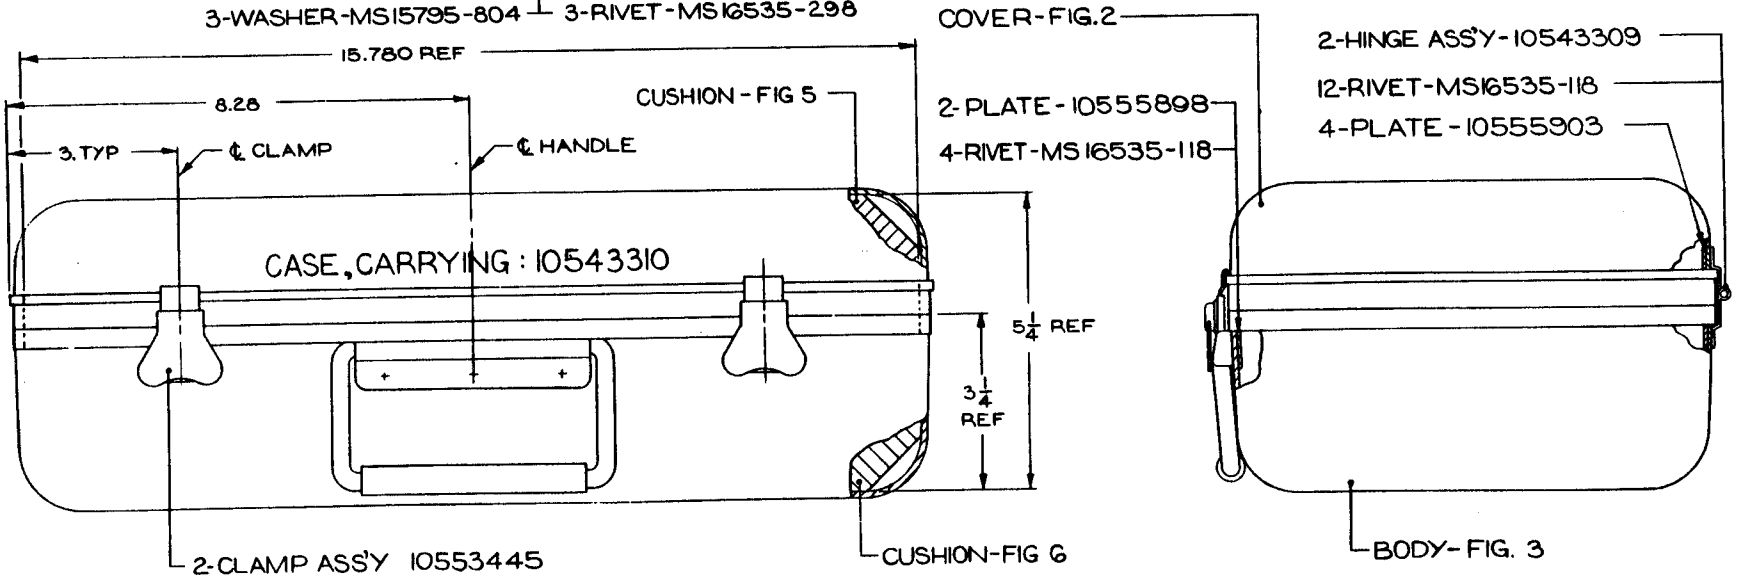


FIG. 1- CASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. BOND IN PLACE WITH ADHESIVE CONFORMING WITH MIL-A-5092, TYPE II

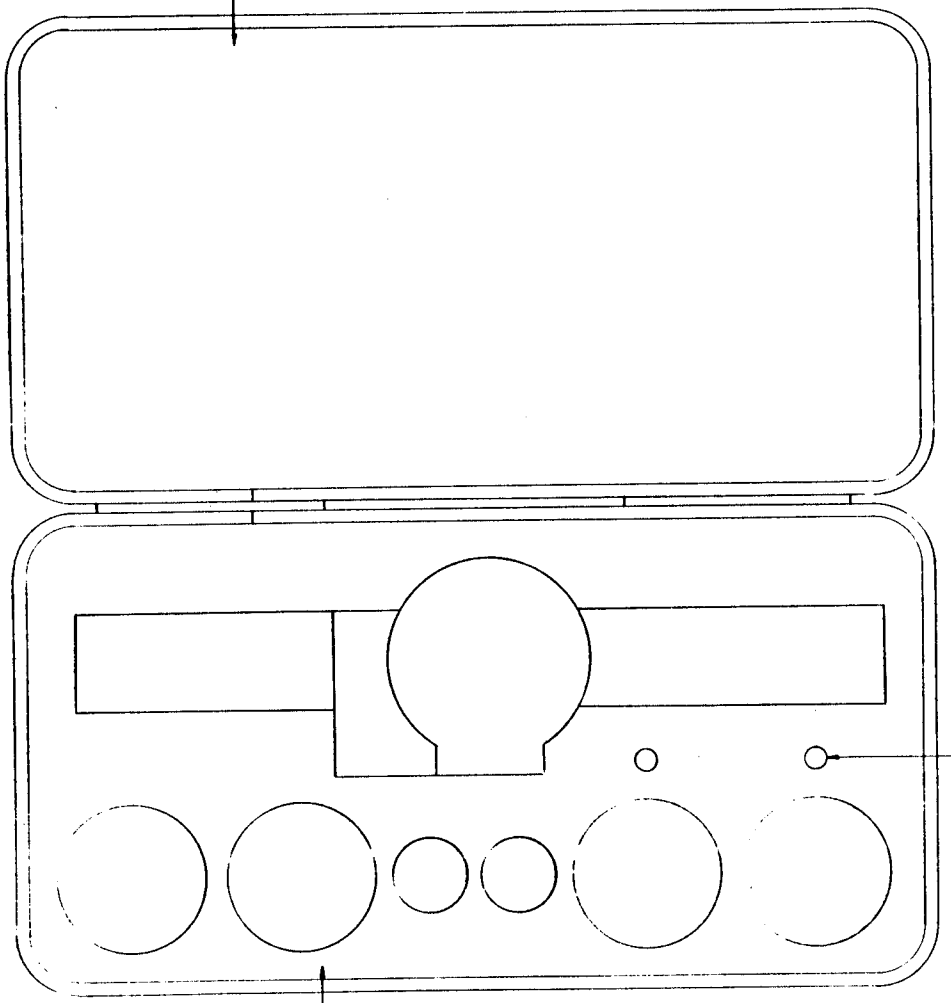


FIG. 1A-CUSHION ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L-AS SPECIFIED IN PARA. 3.2 ; STARTING THICKNESS-.156; FORMED WALL THICKNESS-.095 MIN.; COLOR-OLIVE DRAB-X24087 OF FED-STD-595; FINISH-HAIR-CELL GRAIN EXTERIOR, SMOOTH INTERIOR.
2. TOLERANCES-DECIMAL ±.03, ANGLE ±1°0', FRACTION ± 1/32
3. SEE PARA. 3.5 , .020 ± .010 DEEP.
4. MACHINING OF SHELL SHALL BE APPLIED TO INNER SURFACES ONLY, AND SHALL NOT EXHIBIT PITTED OR ROUGH SURFACES.

SUGGESTED MAT'L SOURCE

U.S. RUBBER CO., CHICAGO, ILL.
PART # R40-4313-CPA 1492


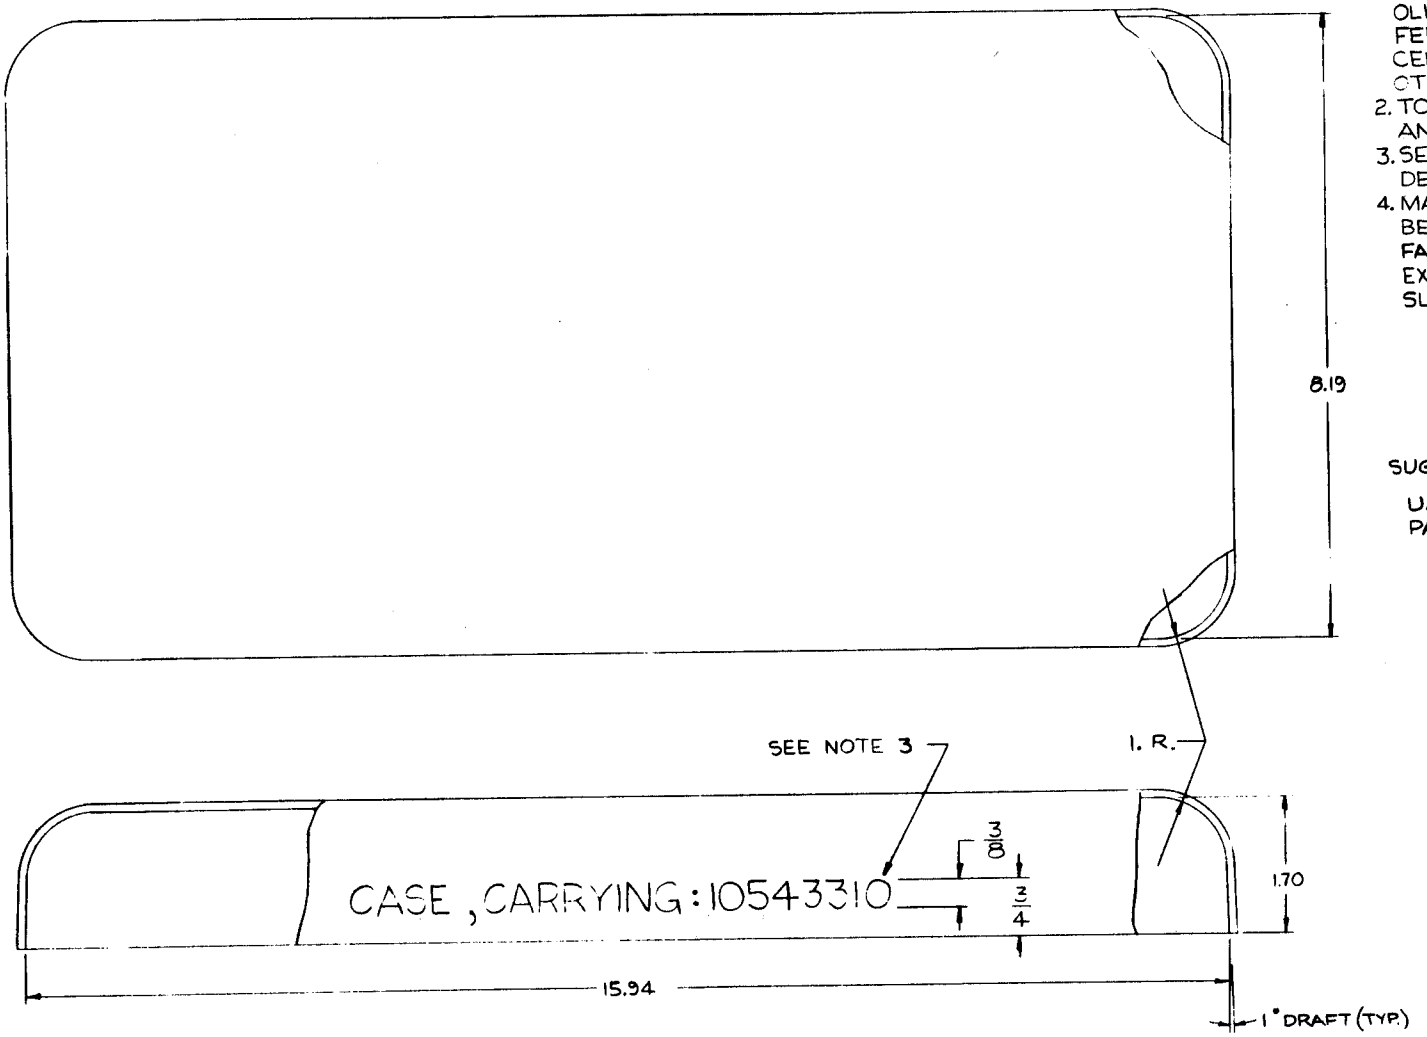


FIG. 2-COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

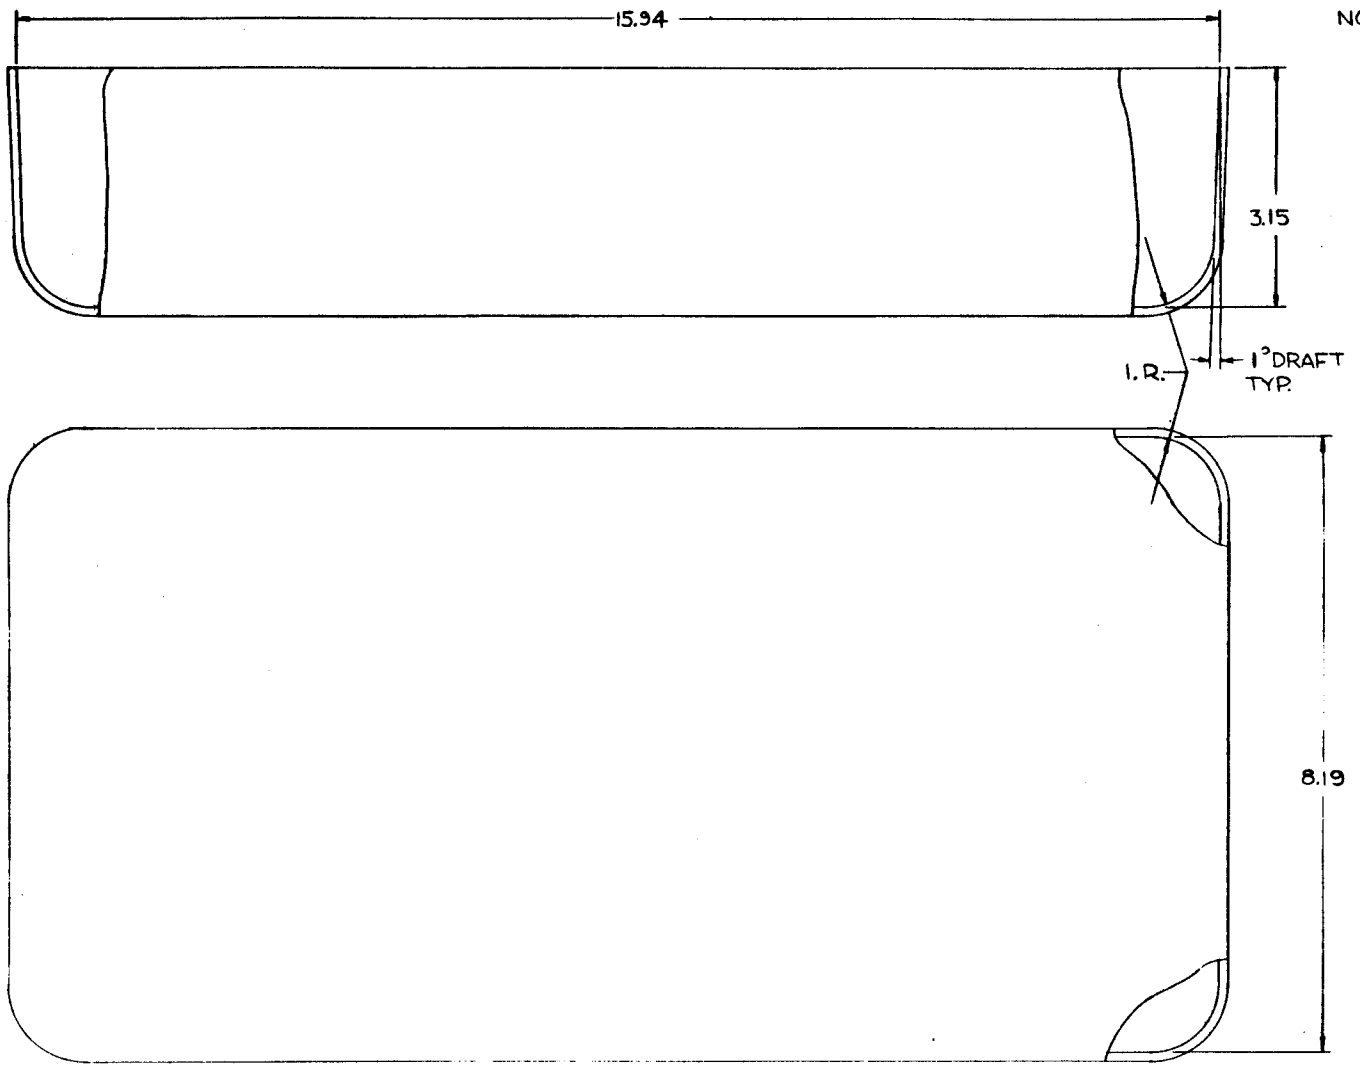

NOTES:

1. MAT'L-AS SPECIFIED IN PARA. 3.2 ; STARTING THICKNESS-.187 ; FORMED WALL THICKNESS-.095 MIN. ; COLOR-OLIVE DRAB-X24087 OF FED-STD-595 ; FINISH- HAIR-CELL GRAIN EXTERIOR , SMOOTH INTERIOR.
2. TOLERANCES-DECIMAL ±.03, ANGLE +1°0°, FRACTION ± 1/32
3. MACHINING OF SHELL SHALL BE APPLIED TO INNER SURFACES ONLY, AND SHALL NOT EXHIBIT PITTED OR ROUGH SURFACES.


SUGGESTED MAT'L SOURCE


U.S. RUBBER CO, CHICAGO, ILL.
PART #R40-4313-CPA 1492

FIG. 3- BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. COMPLETED EDGE FRAMES SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN SECTION "A-A" AND MUST MATCH SHELLS SHOWN IN FIGURES 2 AND 3
2. EXTRUSIONS SHALL BE FORMED, WELDED OR BRAZED AND FINISHED IN ACCORDANCE WITH PARA 3.4.1 AND 3.4.1.1

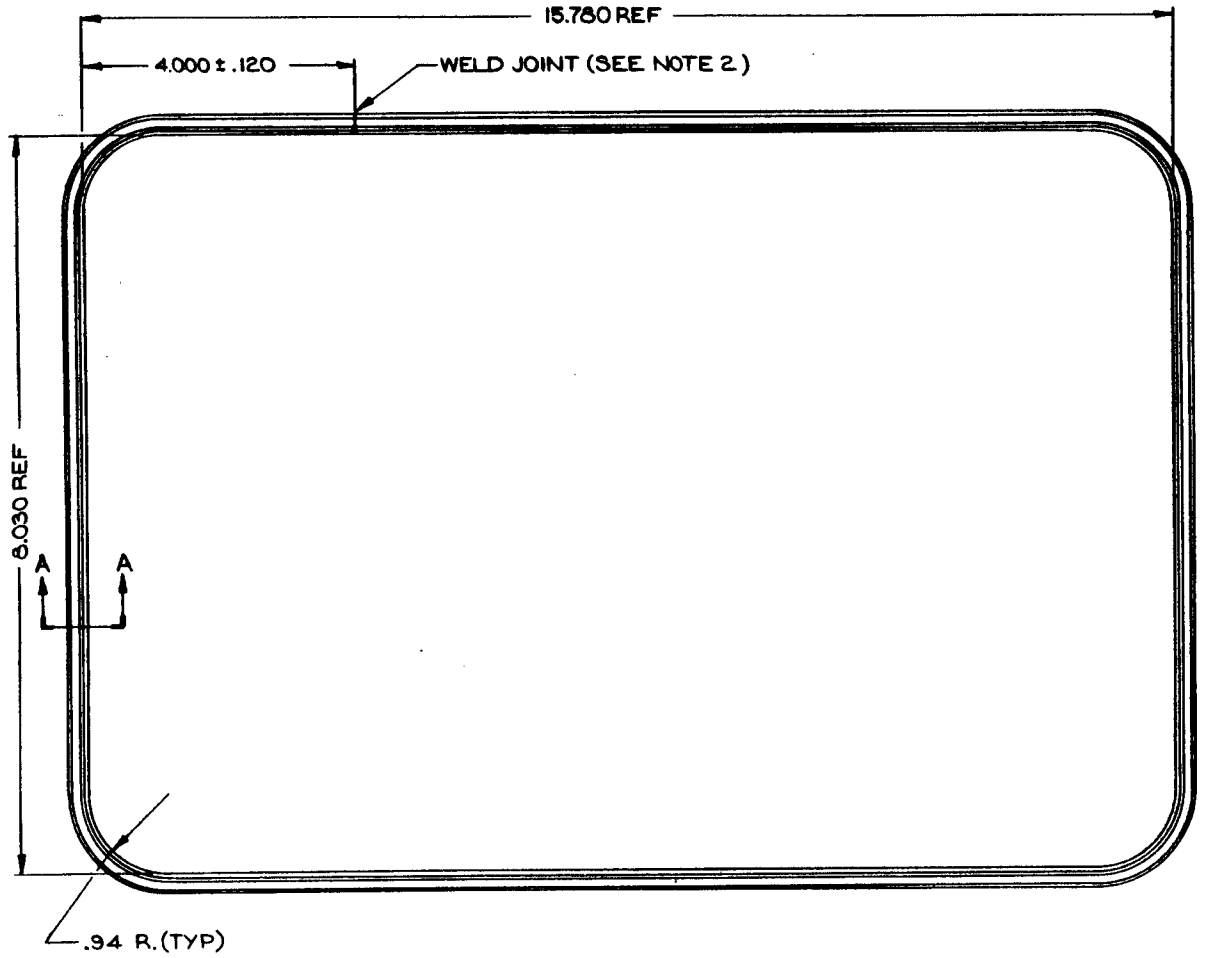

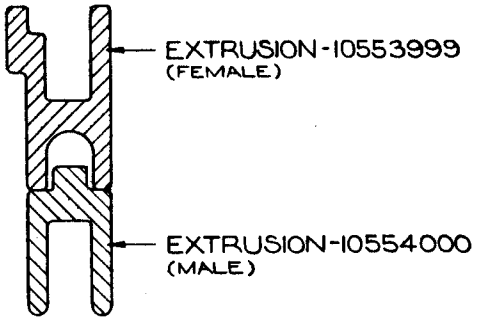

SECTION A-A

FIGURE 4-EXTRUSION ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L-POLYETHYLENE FOAM CONFORMING TO MIL-C-46842, DENSITY-2 LB/CU.FT., COLOR-CHARCOAL.
2. TOLERANCES- FRACTIONS ±1/16 ANGLES ±5°


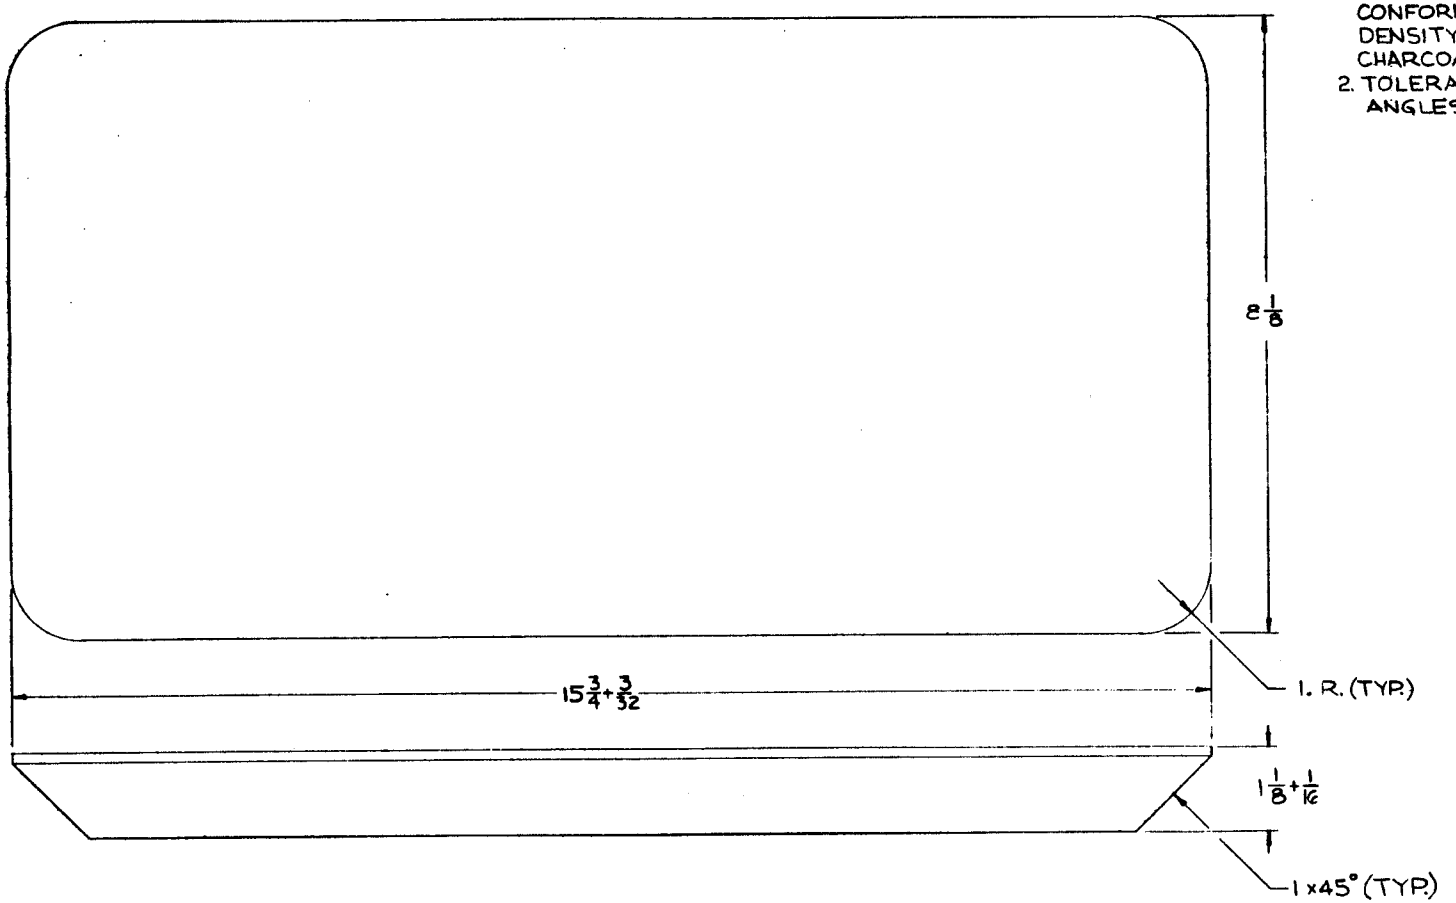


FIG. 5- UPPER CUSHION INSERT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

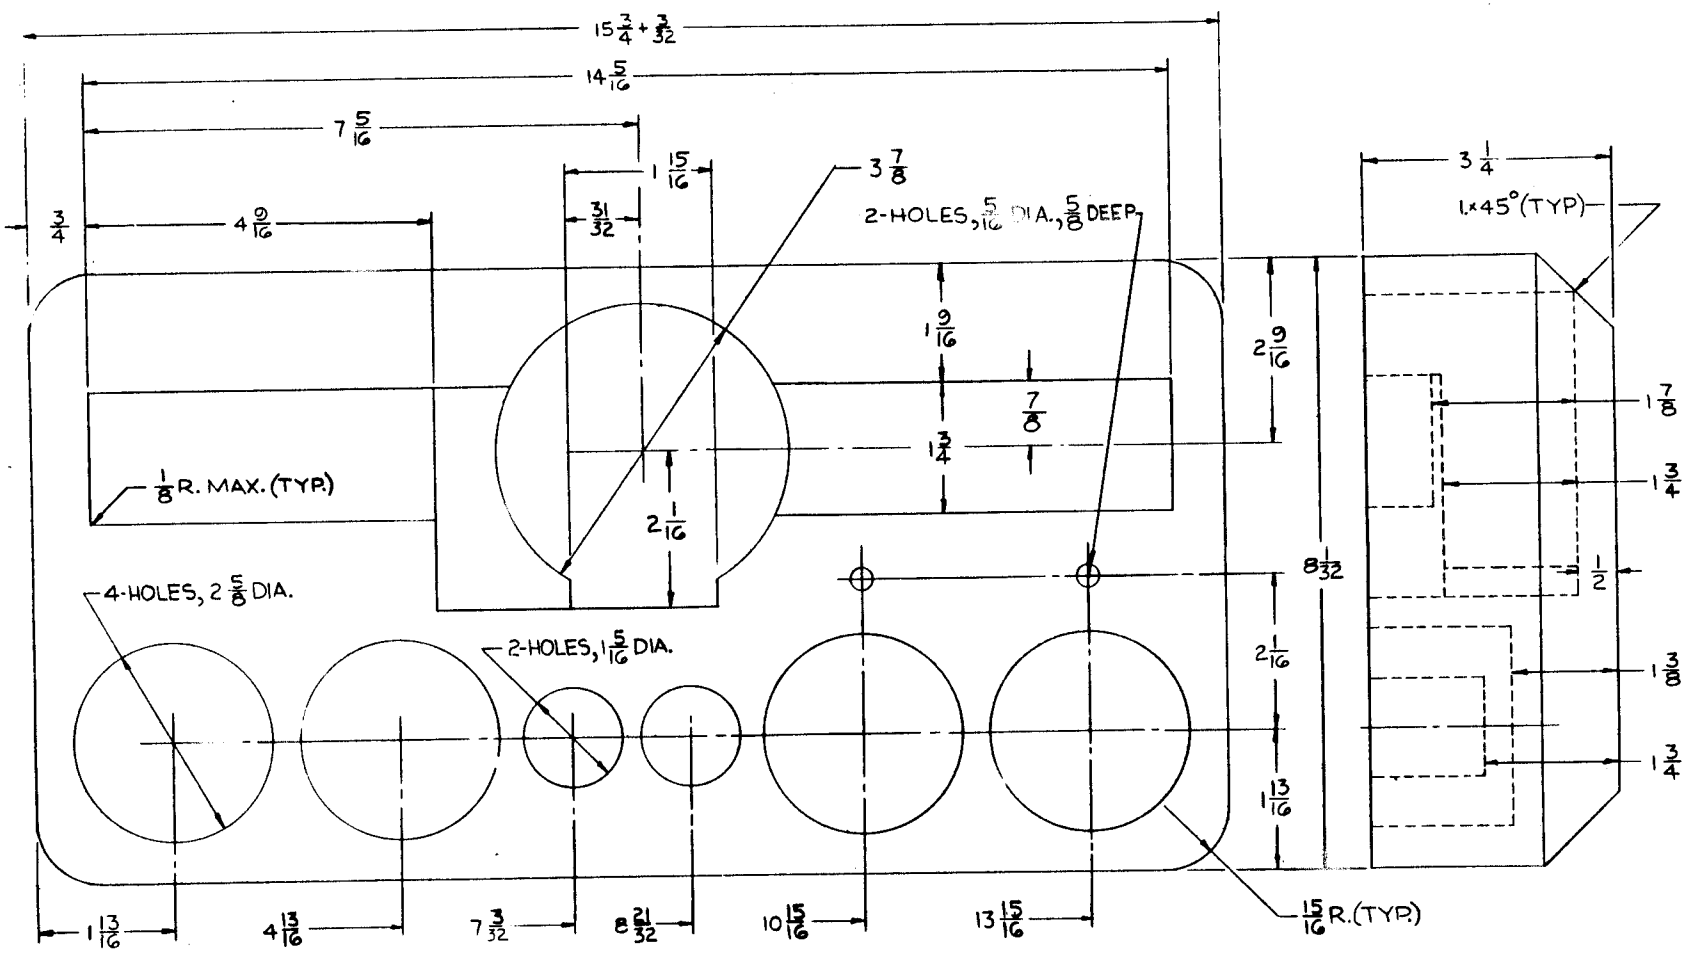


NOTES:
1. MAT'L - POLYETHYLENE FOAM CONFORMING TO MIL-C-4GB42; DENSITY - 2 LBS/CU.FT.; COLOR CHARCOAL.
2. INSERT SHALL BE FABRICATED BY LAMINATION AND FUSED BONDED BY HEAT APPLICATION.
3. TOLERANCES: FRACTIONS ± 1/16, ANGLES ± 5°.


FIG. 6 - LOWER CUSHION INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

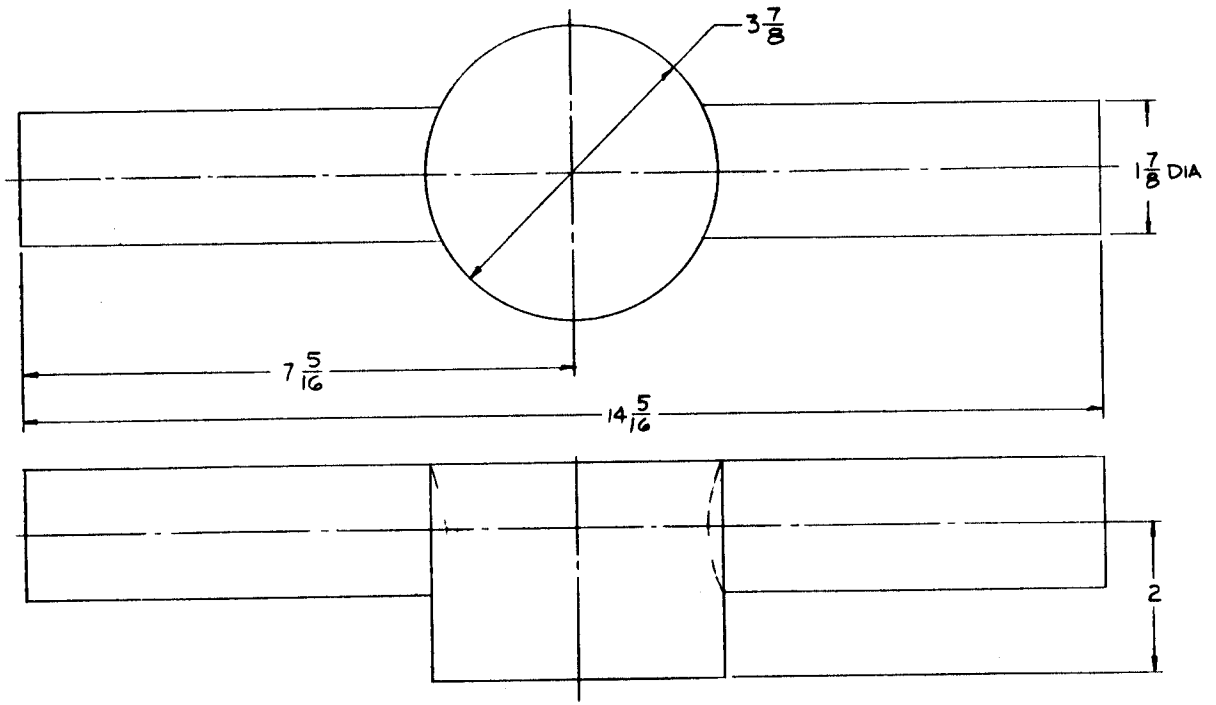

WRENCH (3.67 LBS-DISTRIBUTE EVENLY)





SOCKET (.43 LBS)- 4 REQ'D

MAT'L-OPTIONAL

FIG. 7 DUMMY LOADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-60651A (AR)	2. DOCUMENT DATE (YYMMDD) 13 September 1990

3. DOCUMENT TITLE
CASE, CARRYING: 10543310

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US Army ARDEC Standardization & Specification Office	b. TELEPHONE (Include Area Code) (1) Commercial: (201) 724-6674 (2) AUTOVON: 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.