MIL-C-60683(MU)
17 February 1971
SUPERSEDING
FA-PD-MI-2688
24 August 1965

MILITARY SPECIFICATION
CATAPULT, AIRCRAFT EJECTION SEAT: M4A1
REMANUFACTURED METAL PARTS ASSEMBLY

1. SCOPE

1.1 This specification covers Catapult, Aircraft Ejection Seat: M4A1, Remanufactured Metal Parts Assembly. The assembly will ultimately be loaded and used in conjunction with other propellant actuated devices in aircrew emergency escape systems.

1.2 Items to be reworked under this specification to the remanufactured M4A1 Catapult configuration shall be limited to Catapult, M4A1, P.N., which were previously reworked under "Project Nylok" and Catapult, M4A1.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-A-2550	- Ammunition and Special Weapons, General Specification for
MIL-C-5541	- Chemical Films and Chemical Film Material for Aluminum and Aluminum Alloys

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	- Quality Assurance Terms and Definitions

FSC-1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

2.1 (Continued)

DRAWINGS

Munitions Command

F8593670	- Catapult, Aircraft Ejection Seat, M4A1, Metal Parts Assembly
F8797383	- Ammunition, Container, Fiber M301 for Catapult Aircraft Ejection Seat, M4 or M4A1
F8797384	- Box, Packing, Ammunition, for Catapult, Aircraft Ejection Seat, M4 or M4A1 in Fiber Container M301
IEL-8593670	- Inspection Equipment List for Catapult Aircraft Ejection Seat, M4A1, Metal Parts Assembly

(Copies of specification, standards, drawings and publications required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the Contracting Officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASA B46.1 - Surface Texture

(Application for copies should be addressed to the American Standards Association, 10 East 40th Street, New York, N.Y. 10016)

3. REQUIREMENTS

3.1 General.- Materials, parts and assemblies shall comply with the requirements specified on the applicable drawings and specifications.

3.2 Hydrostatic pressure.- The outside, inside and telescoping tubes shall withstand a constant internal pressure of 3000 pounds per square inch (psi), minimum, for 15 seconds, minimum, without application of any external load and shall show no evidence of leakage or mechanical failure (see 6.2).

3.3 Metal parts assembly.- Parts shall be combined to produce an assembly which conforms to the requirements of the metal parts assembly drawing and the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

3.3.1 Remanufactured metal parts assembly shall contain the following new components

O-ring packing, AN6227-11.

Shear pin, 8593654.

Shock washer, 8593653.

Seal, plain, (2 required) 8593658.

Seal, fixed, 8593661.

Pellet, 8594155 for Cap and Ring, Tube Stop.

3.3.2 Conversion of Catapult, M4A1 P.N. to the latest M4A1 Catapult configuration shall be accomplished by replacing the following components, in addition to replacing the components listed under 3.3.1, and modifying components as noted:

3.3.2.1 Stop rings containing the thin flange (approximately .072 thick) shall be replaced with Ring, Stop and Pellet Assembly, Part No. 8593676.

3.3.2.2 Blocks which contain three 1/8 inch diameter holes on body diameter at the internal threaded end shall be replaced with Block, Part No. 8593672.

3.3.2.3 Ring, tube stop.- Modify in accordance with instructions in 6.3.

3.3.2.4 Tube, inside.- Inside tubes containing three nylon pellets and the original 4 staking slots shall be considered acceptable. If new pellets are required on these tubes, pellet protrusion requirements shall comply with Drawing C8593683.

3.3.3 Torque requirements.- Torque requirements shall be as specified in Table I. No loosening or deformation shall occur upon application of the breakaway torque.

3.3.3.1 Bottoming.- The bottoming torque between block and inside tube and between stop ring and tube stop ring shall not exceed the running torque by more than 50 inch-pounds (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

TABLE I

Components	A Run-On (Inch-Pounds)	B Seating or Bottoming (Including A) (Inch-Pounds)	C Breakaway (Inch-Pounds)
Spacer and Telescoping Tube	75 min.	300 + 50	200 min.
Cap and Outside Tube	75 min.	500 + 50	400 min.
Ring, Tube Stop and Outside Tube	75 min.	500 + 50	400 min.
Ring, Stop and Ring, Tube Stop	75 min.		
Block and Inside Tube	75 min.		

3.4 Protective finish.- Protective finish shall be in accordance with the applicable specifications and drawings and shall apply to all surfaces of the component regardless of configuration. Remanufactured exterior components shall have the existing protective finish stripped and the specified protective finish re-applied (see 6.4).

3.5 Residual magnetism.- The metal parts assembly shall not deflect the indicator of the compass more than three degrees in either direction when passed in front of the compass at a distance of six inches (see 6.5).

3.6 Workmanship.- The requirements for workmanship are as specified on the applicable drawings, referenced specifications and the following:

3.6.1 Metal defects.- The component shall be free from cracks, splits or other metal defects.

3.6.2 Burr.- The component shall not have a burr which might interfere with the assembly or function of the item or which might be injurious to personnel handling the item.

3.6.3 Foreign matter.- The component or assembly shall not contain chips, dirt, grease, rust, corrosion or other foreign matter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Quality assurance terms and definitions.- Reference shall be made to MIL-STD-109 to define the quality assurance terms used.

4.1.2 Inspection.- Inspection shall be in accordance with MIL-A-2550.

4.2 Inspection provisions.

4.2.1 Lot.

4.2.1.1 Submission of product.- The product shall be submitted in accordance with MIL-STD-105.

4.2.1.2 Size of lot.- For the purpose of identification and shipment, the shipping lots of metal parts assemblies shall consist of 1200 catapult, maximum, exclusive of test samples, provided the homogeneity of remanufacturing process has been retained throughout the inspection lot. A smaller lot may be shipped upon approval of the contracting officer.

4.2.2 Examination.- The roughness comparison specimen, prescribed in ASA B46.1 shall be used as a basis of comparison for surface roughness determination. Four power (4X) magnification may be used in performing visual examination for such defects as burr and foreign matter.

4.2.2.1 Reclaimed parts.- Examination of reuseable parts, which require no reprocessing, shall be limited to inspection of defects that require visual type inspection. One hundred percent examination shall be performed for such defects. All nonconforming parts shall be reprocessed or rejected.

4.2.2.2 Reprocessed parts.- One hundred percent examination shall be performed for all critical defects. Examination for major and minor defects shall be performed on a defect basis in accordance with the classification of defects contained herein, using the sampling plan and associated criteria

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.2 (continued)

in Tables II and III. For an individual defect (single characteristic) the criteria in Table II shall be used. For total defects within a major or minor group, the criteria in Table III shall be used. All nonconforming material shall be rejected.

TABLE II

Lot Size	Sample Size	Major Accept	Major Reject	Minor Accept	Minor Reject
1 - 300	100% Examination				
301 - 1,300	110	1	2	2	3
1,301 - 3,200	150	2	3	3	4
3,201 - 8,000	225	3	4	4	5
8,001 - 22,000	300	4	5	5	6

TABLE III

Total Allowable Defects Per Sample Size

Sample Size for Major Defects Number of Defects in Class	110	150	225	300
2 - 3	1	2	3	4
4 - 7	2	3	4	5
8 - 19	3	4	5	7
20 - 43	4	5	8	10
over 43	6	8	11	14

Sample Size for Minor Defects Number of Defects in Class	110	150	225	300
2 - 3	2	3	4	5
4 - 7	3	4	5	7
8 - 16	4	5	8	10
17 - 48	6	8	11	14
over 48	8	11	17	20

4.2.2.3 Latch, Drawing C8593645 covering a detail of Drawing F8593670.

Defects	Methods of Inspection
CRITICAL	
1. Metal defective	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.3 (Continued)

Defects	Methods of Inspection
MAJOR	
101. Angle at large end	Gage
102. Protective finish inadequate or defective	Visual
103. Burr or sharp corner	Visual
104. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.4 Pin, Firing, Drawing C8593657 covering a detail of Drawing F8593670.

CRITICAL	
None defined.	
MAJOR	
101. Metal defective	Visual
102. Protective finish inadequate or defective	Visual
103. Burr or sharp corner, except as permitted	Visual
104. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.5 Block, Drawing F8593672 covering a detail of Drawing F8593670.

CRITICAL	
None defined.	
MAJOR	
101. Pitch diameter of thread, max.	Gage
102. Minor diameter of thread, max.	Gage
103. Diameter of mounting hole in rectangular section	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.5 (Continued)

Defects	Methods of Inspection
MAJOR	
104. Thread damaged including pipe thread	Visual
105. Metal defective	Visual
106. Protective finish inadequate or defective	Visual
107. Burr	Visual
108. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.6 Ring, Tube, Stop, Drawing D8593673 covering a detail of Drawing F8593670.

CRITICAL	
None defined.	
MAJOR	
101. Pitch diameter of internal thread, max.	Gage
102. Minor diameter of internal thread, max.	Gage
103. Pitch diameter of external thread, min.	Gage
104. Major diameter of external thread, min.	Gage
105. Depth of small thread, cavity, min.	Gage
106. Thread damaged	Visual
107. Metal defective	Visual
108. Protective finish inadequate or defective	Visual
109. Burr	Visual
110. Foreign matter	Visual
MINOR	
201. Diameter of groove, small end	Gage
202. Width of groove, small end	Gage
203. Location of groove at small end	Gage
204. Depth of small thread cavity, max.	Gage
205. Radius, chamfer or both, missing or incorrect	Visual
206. Surface finish, improper	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.7 Ring, Tube, Stop and Pellet Assembly, Drawing C8593674 covering a detail of Drawing F8593670.

Defects	Methods of Inspection
CRITICAL	
None defined.	
MAJOR	
None defined.	
MINOR	
201. Pellet missing, loose or improperly inserted	Visual & Manual

4.2.2.8 Ring, Stop, Drawing C8593675 covering a detail of Drawing F8593670.

CRITICAL		
None defined.		
MAJOR		
101.	Pitch diameter of thread, min.	Gage
102.	Major diameter of thread, min.	Gage
103.	Thread damaged	Visual
104.	Metal defective	Visual
105.	Protective finish inadequate or defective	Visual
106.	Burr or sharp corner	Visual
107.	Foreign matter	Visual
MINOR		
None defined.		

4.2.2.9 Ring, Stop and Pellet Assembly, Drawing C8593676 covering a detail of Drawing F8593670.

CRITICAL

None defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.9 (Continued)

Defects	Methods of Inspection
MAJOR	
None defined.	
MINOR	
201. Pellet missing, loose or improperly inserted	Visual & Manual

4.2.2.10 Spacer, Drawing C8593678 covering a detail of Drawing F8593670.

CRITICAL	
None defined.	
MAJOR	
101. Pitch diameter of thread, max.	Gage
102. Minor diameter of thread, max.	Gage
103. Thread damaged	Visual
104. Metal defective	Visual
105. Protective finish inadequate or defective	Visual
106. Burr or sharp corner	Visual
107. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.11 Plug, Drawing C8593679 covering a detail of Drawing F8593670.

CRITICAL	
None defined.	
MAJOR	
101. Metal defective	Visual
102. Protective finish inadequate or defective	Visual
103. Burr or sharp corner	Visual
104. Foreign matter	Visual
MINOR	
None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.12 Tube, Telescoping, Drawing D8593680 covering a detail of Drawing F8593670.

Defects		Methods of Inspection
CRITICAL		
	None defined.	
MAJOR		
101.	Pitch diameter of thread, min.	Gage
102.	Major diameter of thread, min.	Gage
103.	Thread damaged	Visual
104.	Metal defective	Visual
105.	Protective finish inadequate or defective	Visual
106.	Burr	Visual
107.	Foreign matter	Visual
MINOR		
	None defined.	

4.2.2.13 Tube, Telescoping and Pellet Assembly, Drawing D8593681 covering a detail of Drawing F8593670.

CRITICAL		
	None defined.	
MAJOR		
	None defined.	
MINOR		
201.	Pellet missing, loose or improperly inserted	Visual & Manual

4.2.2.14 Tube, Inside, Drawing D8593682 covering a detail of Drawing F8593670.

CRITICAL	
None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.14 (Continued)

Defects	Methods of Inspection
MAJOR	
101. Pitch diameter of thread, min.	Gage
102. Major diameter of thread, min.	Gage
103. Thread damaged	Visual
104. Metal defective	Visual
105. Protective finish inadequate or defective	Visual
106. Surface finish inadequate or defective	Visual
107. Burr	Visual
108. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.15 Tube, Inside and Pellet Assembly, Drawing D8593683 covering a detail of Drawing F8593670.

CRITICAL	
None defined.	
MAJOR	
None defined.	
MINOR	
201. Pellet missing, loose or improperly inserted	Visual & Manual

4.2.2.16 Tube, Outside, Drawing D8593684 covering a detail of Drawing F8593670.

CRITICAL	
1. Metal defective	Visual
MAJOR	
101. Pitch diameter of thread, max.	Gage
102. Minor diameter of thread, max.	Gage
103. Thread damaged	Visual
104. Protective finish inadequate or defective	Visual
105. Burr	Visual
106. Foreign matter	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.16 (Continued)

Defects	Methods of Inspection
MINOR	
None defined	
4.2.2.17 Cap, Drawing C8593677 covering a detail of Drawing F8593670.	
CRITICAL	
1. Metal defective in mounting lugs	Visual
MAJOR	
101. Pitch diameter of thread, min.	Gage
102. Major diameter of thread, min.	Gage
103. Diameter of mounting hole	Gage
104. Thread damaged	Visual
105. Metal defective	Visual
106. Protective finish inadequate or defective	Visual
107. Burr or sharp corner	Visual
108. Foreign matter	Visual
4.2.2.18 Cap and Pellet Assembly, Drawing C8593685 covering a detail of Drawing F8593670.	
CRITICAL	
None defined.	
MAJOR	
None defined.	
MINOR	
201. Pellet missing, loose or improperly installed	Visual & Manual
4.2.2.19 Ring, Compression, Drawing C8594751 covering a detail of Drawing F8593670.	
CRITICAL	
None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.19 (Continued)

Defects	Methods of Inspection
MAJOR	
101. Metal defective	Visual
102. Protective finish, inadequate or defective	Visual
103. Burr	Visual
104. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.20 Metal Parts Assembly, Drawing F8593670.

CRITICAL	
None defined.	
MAJOR	
101. Any part missing, except as otherwise classified	Visual
102. Improper assembly	Visual
103. "O" Ring not lubricated	Visual
104. Thread damaged	Visual
105. Burr	Visual
106. Foreign matter	Visual
MINOR	
201. Shipping plug missing	Visual
202. Protective finish inadequate or defective	Visual

4.2.2.21 Packing in Fiber Container, Drawing F8797383.

CRITICAL	
None defined.	
MAJOR	
None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.21 (Continued)

Defects	Methods of Inspection
MINOR	
201. Contents loose	Manual
202. Metal ends loose or distorted	Manual
203. Gap between body and cover, max.	Visual
204. Cut or damaged through all impregnated layers	Visual

4.2.2.22 Packing in Wooden Box, Drawing F8797384.

CRITICAL	
None defined.	
MAJOR	
None defined.	
MINOR	
201. Contents loose	Manual
202. Hardware missing, loose, broken or improperly engaged	Visual and Manual
203. Strapping missing, loose, broken or improperly assembled	Visual and Manual
204. Contents of box exposed	Visual
205. Box damaged	Visual
206. Marking missing, incorrect or illegible	Visual
207. Number of units incorrect	Visual

4.2.3 Inspection testing.- The following tests shall be performed in accordance with the provisions of 4.3.

4.2.3.1 Hydrostatic pressure.- Each outside, telescoping and inside tube shall be subjected to an internal hydrostatic pressure. Failure of any tube to comply with the requirements of 3.2 shall be cause for rejection of the tube.

4.2.3.2 Breakaway torque.- A breakaway torque shall be applied to each assembly threaded joint as listed in Table I. Failure of any assembly to comply with the requirements of Column C, Table I shall be cause for rejection of the assembly.

4.2.3.3 Protective finish - Replated Components.- The number of specimens and acceptance criteria for protective finish tests shall be in accordance with the applicable Military Standard listed on the drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.3.4 Residual magnetism.- Each Catapult shall be tested for excessive residual magnetism. Failure of any assembly to comply with the requirements of 3.5 shall be cause for rejection of the catapult.

4.2.4 Inspection equipment.- The examination and tests shall be made using equipment listed on IEL 8593670.

4.3 Test methods and procedures.

4.3.1 Hydrostatic pressure.- Prior to the application of protective finish, the outside, telescoping and inside tubes shall be mounted individually in the device and subjected to the internal hydrostatic pressure. The device used shall internally seal the tube within $1\frac{1}{2}$ inches from each end without applying any axail load other than that applied by the liquid pressure.

4.3.2 Breakaway torque.- A torque wrench set at the torque requirements specified in 3.3.3 shall be used to determine the adequacy of the joints. The assembly shall be secured in the fixture prior to application of the torque.

4.3.3 Protective finish, replated components.- Test procedures for protective finish shall be in accordance with the applicable Military Standard referenced on the drawing.

4.3.4 Residual magnetism.- The catapult shall be tested for excessive residual magnetism using an approved compass type AN-5766, in an area free of local magnetic effects by placing the catapult 6 inches from and at the same height as the compass, in a north-south horizontal position (tube stop ring end at south) with the compass set in an east-west heading. The catapult shall be moved slowly past the compass in a longitudinal direction for its entire length, rotated 90 degrees in the horizontal position about its longitudinal axis and moved slowly back past the compass. This procedure shall be repeated for each 90 degree rotation of the catapult.

5. PREPARATION FOR DELIVERY

5.1 Packing and marking.- Packing and marking shall be in accordance with Drawings F8797383 and F8797384.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data.- Procurement documents should specify the title, number and date of this specification.

6.2 A mechanical failure is defined as any deformation or breakage of a part, the occurrence of which is other than a design function.

6.3 Ring, tube stop.- Tube stop rings which do not contain the .065 + .010 groove on body at internal threaded end shall be modified in accordance with Figure 1.

6.4 Protective finish.

6.4.1 Exterior steel components.- Remanufactured exterior steel components (cap, compression ring and stop ring) shall have the existing protective finish stripped and the specified protective finish re-applied.

6.4.2 Tube, outside.- Remanufactured aluminum outside tube shall have either the exterior surfaces or the entire component stripped of the existing protective finish and the specified protective finish re-applied.

6.4.3 Ring, tube stop.- Remanufactured aluminum tube stop ring shall have either the exterior surfaces, excluding the external thread, or the entire component stripped of the existing protective finish and the specified protective finish re-applied.

6.4.4 Block.- Remanufactured aluminum block shall have the existing protective finish stripped and the specified protective finish re-applied on all surfaces of the rectangular section only, including the adjacent surfaces right angle to the rectangular section and mounting hole, and excluding the 1/8 pipe thread and all other internal surfaces.

6.4.5 Exposure of base metal on all other aluminum components and surfaces shall be treated with a Chemical Film, Grade A or B, Class 1, MIL-C-5541.

6.5 When remanufacturing and loading of assembly are performed by the same facility, the requirements of 3.3.3.1 are waived and the residual magnetism requirement specified in 3.5 performed on the loaded assembly only.

6.6 All components containing nylon pellets in which the existing protective finish is stripped and protective finish re-applied shall contain new nylon pellets in accordance with the applicable drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

6.7 Supersession data.- This specification includes the requirements of Purchase Description FA-PD-MI-2688 dated 24 August 1965.

Custodian:

Army - MU


Preparing activity:


Army - MU

Project No. 1377-A186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

RING TUBE STOP, MODIFICATION

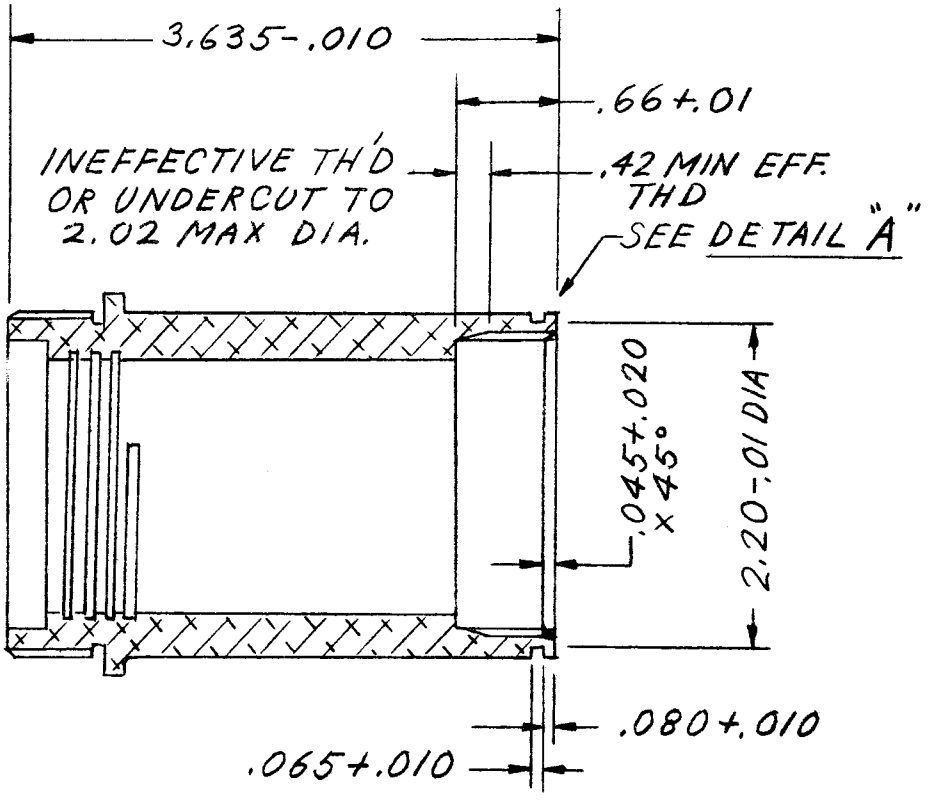

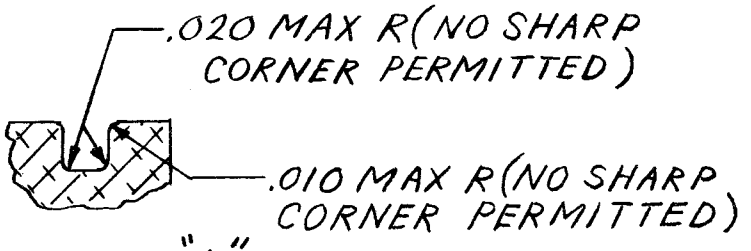

DETAIL "A"

NOTE:

1. FOR ALL OTHER REQUIREMENTS SEE DWG D8593673.

FIGURE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

[ ] YES [ ] NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.