MIL-C-60685(MU)
15 April 1970
SUPERSEDING
FA-PD-MI-2653
18 May 1965

MILITARY SPECIFICATION
CATAPULT, AIRCRAFT EJECTION SEAT: M3A1, REMANUFACTURED METAL PARTS ASSEMBLY

1. SCOPE

1.1 This specification covers Catapult, Aircraft Ejection Seat, M3A1, Remanufactured Metal Parts Assembly. The assembly will ultimately be loaded and used in conjunction with other propellant actuated devices in aircrew emergency escape systems.

1.2 Items to be reworked under this specification to the remanufactured M3A1 Catapult configuration shall be limited to Catapult, M3A1 P.N., which were previously reworked under "Project Nylok" and Catapult, M3A1.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS
Military
- MIL-A-2550 - Ammunition and Special Weapons, General Specification for
- MIL-C-5541 - Chemical Films and Chimeical Film Materials for Aluminum and Aluminum Alloys

STANDARDS
Military
- MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
- MIL-STD-109 - Quality Assurance Terms and Definitions

DRAWINGS
Munitions Command
- F8593636 - Catapult, Aircraft Ejection Seat, M3A1, Metal Parts Assembly

FSC 1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

2.1 DRAWINGS (Cont'd)

F8797431	- Ammunition Container, Fiber M304 for Catapult, Aircraft Ejection Seat, M3A1
F8797432	- Box, Packing, Ammunition for Catapult, Aircraft Ejection Seat, M3A1
IEL-8593636	- Inspection Equipment List for Catapult, Air-Craft Ejection Seat, M3A1, Metal Parts Assembly

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASA B46.1 - Surface Texture

(Application for copies should be addressed to the American Standards Association, 10 East 40th Street, New, N.Y. 10016)

3. REQUIREMENTS

3.1 General.- Materials, parts and assemblies shall comply with the requirements specified on the applicable drawings, referenced specifications and the following:

3.2 Hydrostatic pressure.- The components listed below shall withstand the corresponding internal pressure as indicated in Table I for a period of 15 seconds, minimum, without application of any external load and shall show no evidence of leakage or mechanical failure (see 6.2).

Table I

Component	Hydrostatic Pressure (psi minimum)
Outside Tube	2500
Telescoping Tube	3200
Inside Tube	3200

3.3 Metal parts assembly.- Parts shall be combined to produce an assembly which conforms to the requirements of the metal parts assembly drawing and the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

3.3.1 Remanufactured metal parts assembly shall contain the following new components:

O-ring packing, AN6227-11.
Pin, shear, 8593654.
Washer, shock, 8593652.
Seal, plain, 8593659.
Seal, fixed, 8593662.
Pellet, 8594154 for inside and outside tubes.

3.3.2 Conversion of Catapult, M3A1 P.N. to the latest M3A1 Catapult configuration shall be accomplished by replacing the following components, in addition to replacing the components listed under 3.3.1 and by modifying components as noted:

3.3.2.1 Stop rings containing the thin flange (approximately .072 thick) shall be replaced with Ring, Stop, Part No. 8593643.

3.3.2.2 Blocks which contain three 1/8 inch diameter holes on body diameter at the internal threaded end shall be replaced with Block, Part No. 8593648.

3.3.2.3 Trunnion.- See 6.4.1.

3.3.2.4 Tube, inside.- See 6.4.3.1.

3.3.2.5 Tube, outside.- See 6.5.

3.3.3 Torque.- Torque requirements shall be as specified in Table II. No loosening or deformation shall occur upon application of the breakaway torque.

Table II

Component	A Run-On (Inch Pounds)	B Seating or Bottoming (including A)(Inch-Pounds)	C Breakaway (Inch-Pounds)
Cap and Outside Tube	75 min	550 + 50	400 min
Trunnion and Outside Tube	75 min	550 + 50	400 min
Spacer and Telescoping Tube	---	---	200 min
Block and Inside Tube	75 min	---	---
Stop Ring and Trunnion	75 min	---	---

3.3.3.1 Bottoming torque.- The bottoming torque between block and inside tube and between stop ring and trunnion, shall not exceed the running torque by more than 50 inch-pounds. (see 6.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

3.4 Protective finish.- Protective finish shall be in accordance with the applicable specification and drawings and shall apply to all surfaces of the component regardless of configuration (see 6.4.4).

3.5 Residual magnetism.- The metal parts assembly shall not deflect the indicator of the compass more than three degrees in either direction when passed in front of the compass at a distance of 6 inches (see 6.3).

3.6 Workmanship.- The requirements for workmanship are as specified on the applicable drawings, referenced specifications and the following:

3.6.1 Metal defects.- The part shall be free from cracks, splits, or other metal defects.

3.6.2 Burr.- The part shall not have a burr which might interfere with the assembly or function of the item or which might be injurious to personnel handling the item.

3.6.3 Foreign matter.- The part or assembly shall not contain chips, dirt, grease, rust, corrosion or other foreign matter.

3.7 Special instructions.- See notes in 6.4.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Quality assurance terms and definitions.- Reference shall be made to MIL-STD-109 to define the quality assurance terms used.

4.1.2 Inspection.- Inspection shall be in accordance with MIL-A-2550.

4.2 Inspection provisions.

4.2.1 Lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.1.1 Submission of product.- The product shall be submitted in accordance with MIL-STD-105.

4.2.1.2 Size of lot.- For the purpose of identification and shipment, the shipping lots of metal parts assemblies shall consist of 1200 catapults, maximum, exclusive of test samples, provided the homoegneity of remanufacturing process has been retained throughout the inspection lot. A smaller lot may be shipped upon approval of the contracting officer.

4.2.2 Examination.- The roughness comparison specimens prescribed in ASA B46.1 shall be used as a basis of comparison for surface roughness determination. Four power (4X) magnification may be used in performing visual examination for such defects as burr and foreign matter.

4.2.2.1 Reclaimed parts.- Examination of reuseable parts, which require no reprocessing, shall be limited to inspection of defects that require visual type inspection and gaging of mounting hole in block, trunnion lugs and wall thickness in de-staked area of outside tube. One hundred percent examination shall be performed for all such defects. All nonconforming parts shall be either reprocessed or rejected.

4.2.2.2 Reprocessed parts.- One hundred percent examination shall be performed for all critical defects. Examination for major and minor defects shall be performed on a defect basis in accordance with the classification of defects contained herein, using the sampling plan and associated criteria in Tables III and IV. For an individual defect (single characteristic) the criteria in Table III shall be used. For total defects within a major or minor group, the criteria in Table IV shall be used. All nonconforming material shall be rejected.

Table III

Lot Size	Sample Size	Major		Minor	
		Accept	Reject	Accept	Reject
1 - 300	100% Examination				
301 - 1300	110	1	2	2	3
1301 - 3200	150	2	3	3	4
3201 - 8000	225	3	4	4	5
8001 - 22000	300	4	5	5	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

Table IV

Total Allowable Defects Per Sample Size

Sample Sizes for Major Defects Number of Defects in Class	110	150	225	300
2 - 3	1	2	3	4
4 - 7	2	3	4	5
8 - 19	3	4	5	7
20 - 43	4	5	8	10
over 43	6	8	11	14

Sample Sizes for Minor Defects Number of Defects in Class	110	150	225	300
2 - 3	2	3	4	5
4 - 7	3	4	5	7
8 - 16	4	5	8	10
17 - 48	6	8	11	14
over 48	8	11	17	20

4.2.2.3 Tube, Outside, Drawing D8593638, covering a detail of Drawing F8593636.

Defect	Method of Inspection
CRITICAL	
1. Metal defective	Visual
MAJOR	
101. Pitch diameter of thread, min.	Gage
102. Major diameter of thread, min.	Gage
103. Thickness of wall in de-staked area (see 6.5)	Gage
104. Thread damaged	Visual
105. Protective finish inadequate or defective	Visual
106. Burr	Visual
107. Foreign matter	Visual
MINOR	
None defined	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.4 Tube, Outside and Pellet Assembly, Drawing C8593639, covering a detail of Drawing F8593636.

Defect		Method of Inspection
CRITICAL		
	None defined	
MAJOR		
	None defined	
MINOR		
201.	Pellet missing, loose or improperly inserted	Manual & Visual

4.2.2.5 Tube, telescoping, Drawing D8593640, covering a detail of Drawing F8593636.

CRITICAL		
	None defined	
MAJOR		
101.	Pitch diameter of thread, min.	Gage
102.	Major diameter of thread, min.	Gage
103.	Thread damaged	Visual
104.	Metal defective	Visual
105.	Protective finish inadequate or defective	Visual
106.	Burr	Visual
107.	Foreign matter	Visual
MINOR		
	None defined	

4.2.2.6 Ring, Stop, Drawing C8593642, covering a detail of Drawing F8593636

CRITICAL	
None defined	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.6 (Cont'd)

Defect	Method of Inspection
MAJOR	
101. Pitch diameter of thread, min.	Gage
102. Major diameter of thread, min.	Gage
103. Thread damaged	Visual
104. Metal defective	Visual
105. Protective finish inadequate or defective	Visual
106. Burr or sharp corner	Visual
107. Foreign matter	Visual
MINOR	
None defined	

4.2.2.7 Ring, Stop, and Pellet Assembly, Drawing C8593643, covering a detail of Drawing F8593636.

CRITICAL	
None defined	
MAJOR	
None defined	
MINOR	
201. Pellet missing, loose or improperly inserted	Manual & Visual

4.2.2.8 Latch, Drawing C8593644, covering a detail of Drawing F8593636.

CRITICAL	
1. Metal defective	Visual
MAJOR	
101. Angle at large end	Gage
102. Protective finish inadequate or defective	Visual
103. Surface finish, improper	Visual
104. Burr or sharp corner	Visual
105. Foreign matter	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.8 (Cont'd)

Defect	Method of Inspection
MINOR	
None defined	
4.2.2.9 Tube, Inside, Drawing D8593646, covering a detail of Drawing F8593636.	
CRITICAL	
None defined	
MAJOR	
101. Pitch diameter of thread, min.	Gage
102. Major diameter of thread, min.	Gage
103. Threads damaged	Visual
104. Metal defective	Visual
105. Protective finish inadequate or defective	Visual
106. Burr	Visual
107. Foreign matter	Visual
MINOR	
None defined	
4.2.2.10 Tube, Inside and Pellet Assembly, Drawing C8593647, covering a detail of Drawing F8593636.	
CRITICAL	
None defined	
MAJOR	
101. Burr	Visual
102. Foreign matter	Visual
MINOR	
201. Pellet missing, loose or improperly inserted	Manual & Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.11 Block, Drawing F8593648, covering a detail of Drawing F8593636.

Defect		Method of Inspection
CRITICAL		
	None defined	
MAJOR		
101.	Pitch diameter of thread, max.	Gage
102.	Minor diameter of thead, max.	Gage
103.	Diameter of hole in rectangular section	Gage
104.	Thread damaged, including pipe thread	Visual
105.	Metal defective	Visual
106.	Protective finish inadequate or defective	Visual
107.	Burr	Visual
108.	Foreign matter	Visual
MINOR		
	None defined	

4.2.2.12 Trunnion, Drawing F8593649, and Figure 2 (for modification), covering a detail of Drawing F8593636.

CRITICAL		
1.	Metal defective in mounting lug	Visual
MAJOR		
101.	Pitch diameter of small thread, max.	Gage
102.	Minor diameter of small thread, max.	Gage
103.	Pitch diameter of large thread, max.	Gage
104.	Minor diameter of large thread, max.	Gage
105.	Diameter of lugs	Gage
106.	Depth of small thread cavity, min.	Gage
107.	Thread damaged	Visual
108.	Metal defective, except as otherwise classified	Visual
109.	Protective finish inadequate or defective	Visual
110.	Burr or sharp corner	Visual
111.	Foreign matter	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.12 (Cont'd)

Defect	Method of Inspection
MINOR	
201. Diameter of groove, small end	Gage
202. Depth of small thread cavity, max.	Gage
203. Length from base of large cavity to small end	Gage
204. Width of groove, small end	Gage
205. Location of groove, small end	Gage
206. Radius, chamfer or both, missing or incorrect	Gage
207. Surface finish, improper	Visual

4.2.2.13 Cap, Drawing C8593650, covering a detail of Drawing F8593636.

CRITICAL

None defined.

MAJOR	
101. Pitch diameter of thread, max.	Gage
102. Minor diameter of thread, max.	Gage
103. Thread damaged	Visual
104. Metal defective	Visual
105. Protective finish inadequate or defective	Visual
106. Burr or sharp corner	Visual
107. Foreign matter	Visual

MINOR

None defined.

4.2.2.14 Spacer, Drawing C8593651, covering a detail of drawing F8593636.

CRITICAL

None defined.

MAJOR	
101. Pitch diameter of thread, max.	Gage
102. Minor diameter of thread, max.	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.14 (Cont'd)

Defect	Method of Inspection
MAJOR	
103. Threads damaged	Visual
104.. Metal defective	Visual
105. Protective finish inadequate or defective	Visual
106. Burr or sharp corner	Visual
107. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.15 Plug, Drawing C8593656, covering a detail of Drawing F8593636.

CRITICAL	
None defined.	
MAJOR	
101. Metal defective	Visual
102. Protective finish inadequate or defective	Visual
103. Burr or sharp corner	Visual
104. Foreign matter	Visual
MINOR	
None defined.	

4.2.2.16 Pin, Firing, Drawing C8593657, covering a detail of Drawing F8593636.

CRITICAL	
None defined.	
MAJOR	
101. Metal defective	Visual
102. Protective finish inadequate or defective	Visual
103. Burr	Visual
104. Foreign matter	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.16 (Cont'd)

Defect	Method of Inspection
MINOR	
None defined.	
4.2.2.17 Metal Parts Assembly, Drawing F8593636.	
CRITICAL	
None defined.	
MAJOR	
101. Spacer not properly positioned	Gage
102. Any part missing, except as otherwise classified	Manual and Visual
103. Improper assembly	Visual
104. Thread damaged	Visual
105. Burr	Visual
106. Foreign matter	Visual
MINOR	
201. Shipping plug missing	Visual
202. Protective finish, inadequate or defective	Visual
4.2.2.18 Fiber Container, Drawing F8797431.	
CRITICAL	
None defined.	
MAJOR	
None defined.	
MINOR	
201. Contents loose	Manual
202. Metal ends loose or distorted	Manual
203. Gap between body and cover, max.	Visual
204. Cut or damaged through all impregnated layers	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.2.19 Packing Box, Drawing F8797432.

Defect	Method of Inspection
CRITICAL	
None defined.	
MAJOR	
None defined.	
MINOR	
201. Contents loose	Manual
202. Hardware missing, loose, broken or improperly engaged	Visual and Manual
203. Strapping missing, loose, broken or improperly assembled	Visual and Manual
204. Contents of box exposed	Visual
205. Box damaged	Visual
206. Marking missing, incorrect or illegible	Visual
207. Number of units incorrect	Visual

4.2.2.20 Sealing and Retaining - Compound Application.- Each telescoping tube and spacer assembly shall be examined for presence of sealant on all surfaces other than the threaded joint of telescoping tube and spacer. Presence of sealant shall be cause for rejection of the assembly.

4.2.3 Inspection Testing.- The following tests shall be performed in accordance with the provisions of 4.3:

4.2.3.1 Hydrostatic Pressure.- Each outside, telescoping and inside tube shall be subjected to an internal hydrostatic pressure. Failure of any tube to comply with the requirements of 3.2 shall be cause for rejection of the tube.

4.2.3.2 Breakaway Torque.- A breakaway torque shall be applied to each assembly threaded joint as listed in Table II. Failure of any assembly to comply with the requirements of column C of Table II shall be cause for rejection of the assembly.

4.2.3.3 Protective Finish, Replated Components.- The number of specimens and acceptance criteria for protective finish tests shall be in accordance with the applicable Military Standard listed on the drawing.

4.2.3.4 Residual Magnetism.- Each catapult shall be tested for excessive residual magnetism. Failure of any catapult to comply with the requirements of 3.5 shall be cause for rejection of the catapult.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.2.4 Inspection equipment.- The examination and tests shall be made using equipment listed on IEL-8593636.

4.3 Test methods and procedures.

4.3.1 Hydrostatic pressure.- The outside, telescoping and inside tube shall be mounted in the device and subjected to the internal hydrostatic pressure. The device used shall internally seal the tube within 1-$\frac{1}{2}$ inches from each end without applying any axial load other than that applied by the liquid pressure.

4.3.2 Breakaway torque.- A torque wrench set at the torque requirements specified in 3.3.3 shall be used to determine the adequacy of the joints. The assembly shall be secured in the fixture prior to application of the torque.

4.3.3 Protective finish, replated parts.- Test procedures for protective finish shall be in accordance with the applicable Military Standard referenced on the drawing.

4.3.4 Residual magnetism.- The catapult shall be tested for excessive residual magnetism in an area free of local magnetic effects by placing the assembly 6 inches from and at the same height as the compass in a north-south horizontal position (trunnion end at south) with the compass set in an east-west heading as shown in Figure 1. The assembly shall be moved slowly past the compass in a longitudinal direction for its entire length, rotated 180 degrees in the horizontal position about its longitudinal axis and moved slowly back past he compass.

5. PREPARATION FOR DELIVERY

5.1 Packing and marking.- Packing and marking shall be in accordance with Drawings F8797431 and F8797432.

6. NOTES

6.1 Ordering data.- Procurement documents should specify the title, number and date of this specification.

6.2 A mechanical failure is defined as any deformation or breakage of a part, the occurrence of which is other than a design function.

6.3 When remanufacturing and loading of assembly are performed by the same facility, the requirements of 3.3.3.1 are waived and the residual magnetism requirement specified in 3.5 performed on the loaded assembly only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

6.4 Special instructions covering modification, repair and assembly of remanufactured components are as follows:

6.4.1 Trunnion.- Trunnions which do not contain the .065 + .010 groove on body at small end shall be modified in accordance with figure 2.

6.4.2 Spacer and telescoping tube assembly.- Spacer shall be secured to telescoping tube with adhesive compound in accordance with Drawing F8593636. (Note: Removal of both nylon pellets from telescoping tube not required.)

6.4.3 Inside tube and pellet assembly.- Nylon pellets shall be removed from inside tube and new pellets shall be inserted in accordance with the following:

6.4.3.1 Inside tubes containing pellets which are located 60 degrees apart and .312 ± .015 from tube end shall be modified to have pellets 180 degrees apart in accordance with figure 3.

6.4.3.2 Inside tubes containing pellets which are located 180 degrees apart and .219 ± .015 and .188 ± .015 from tube end shall contain new pellets in accordance with Drawing C8593647.

6.4.4 Protective finish.

6.4.4.1 Exterior steel components.- Remanufactured exterior steel components (cap, trunnion and stop ring) shall have the existing protective finish stripped and the specified protective finish re-applied.

6.4.4.2 Outside tube.- Remanufactured aluminum outside tube shall have the existing protective finish stripped and the specified protective finish shall be re-applied as described in 6.4.4.2.1 or 6.4.4.2.2.

6.4.4.2.1 The outside diameter only, excluding both threaded ends.

6.4.4.2.2 The entire tube, providing the thread dimensional requirements can still be maintained as required by Drawing D8593638.

6.4.4.3 Block.- Remanufactured aluminum block shall have the existing protective finish stripped and the specified protective finish re-applied on all surfaces of the rectangular section only, including the adjacent surfaces right angle to the rectangular section and excluding the 1/8 pipe thread and internal surfaces.

6.4.4.4 Exposure of base metal on all other aluminum components and surfaces shall be treated with a Chemical Film, Grade A or B, Class 1, MIL-C-5541.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the currentversion before use.

6.4.5 All parts containing nylon pellets in which the existing protective finish is stripped and protective finish re-applied, shall contain new nylon pellets in accordance with the applicable drawing.

6.5 Outside tube (reworked under Project Nylok). Outside tubes containing a de-staking notch at base cap threaded end shall be considered acceptable providing the wall thickness at the notch is not less than .060.

6.6. Supersession data.- This specification includes the requirements of Purchase Description FA-PD-MI-2653 dated 18 May 1965.

Custodian:

Army - MU


Preparing activity:

Army - MU

Project No. 1377-A188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

PILOT'S STANBY COMPASS, TYPE AN-5766

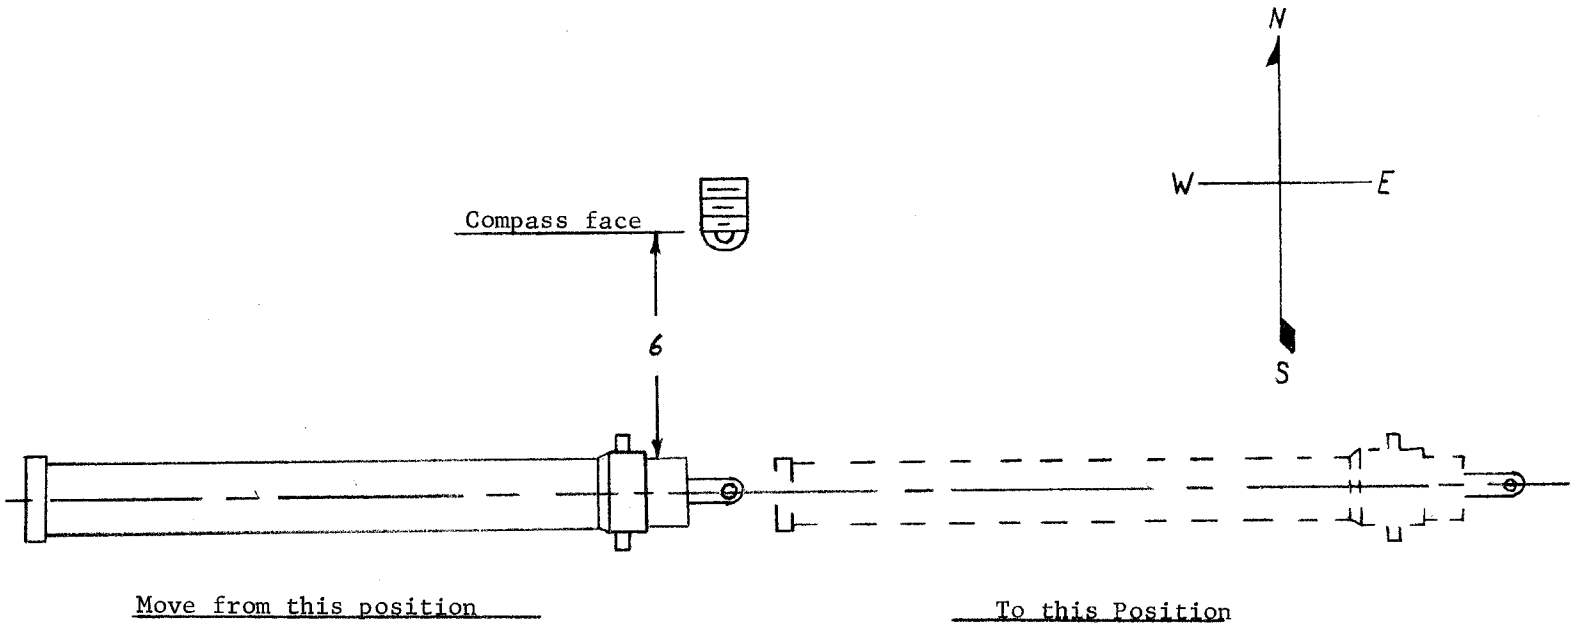

Plan View


NOTE:
1. Catapult and compass shall lie in a horizontal plane

FIGURE 1

LAYOUT FOR DETERMINATION OF RESIDUAL MAGNETISM IN CATAPULT, AIRCRAFT EJECTION SEAT, M3A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

TRUNNION MODIFICATION

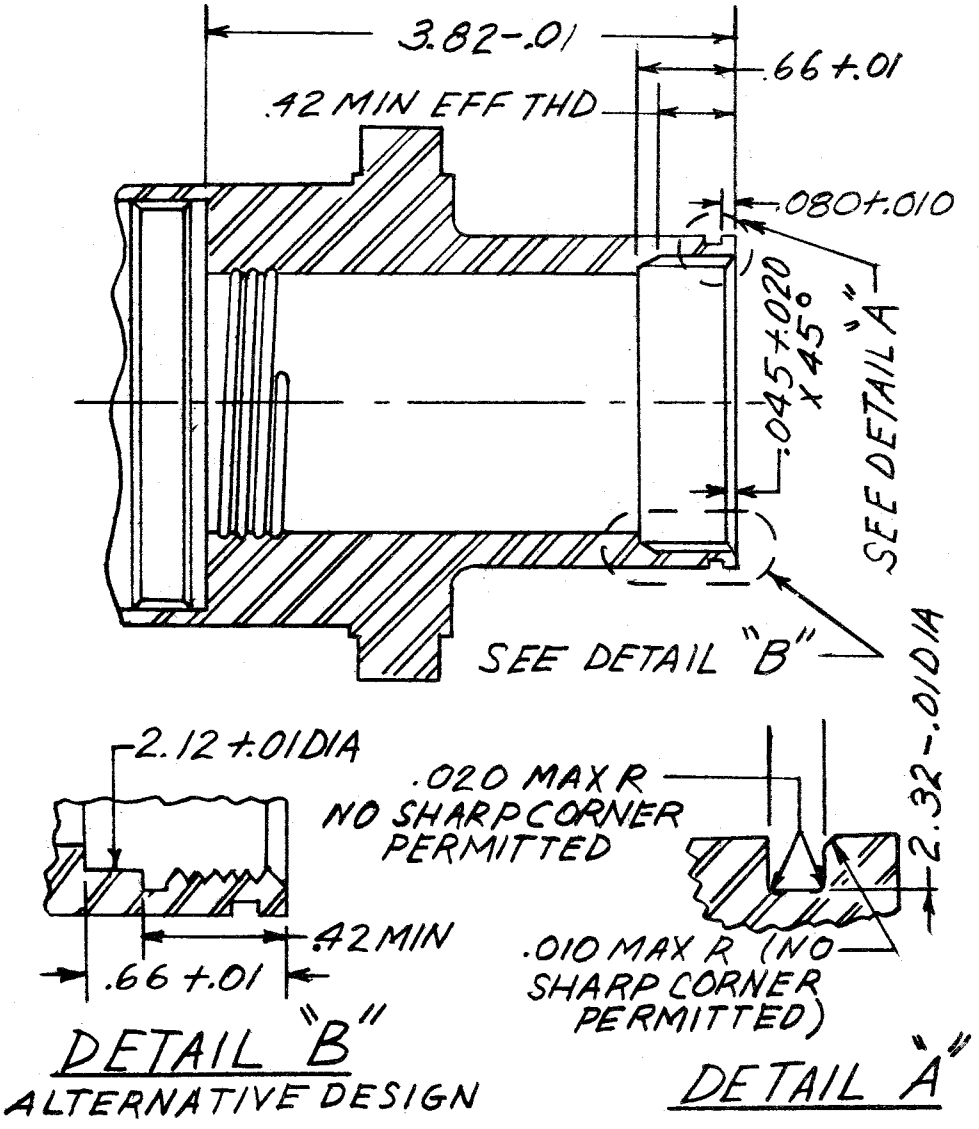


NOTE:
1. **For all other requirements see Drawing D8593649**

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

INSIDE TUBE MODIFICATION

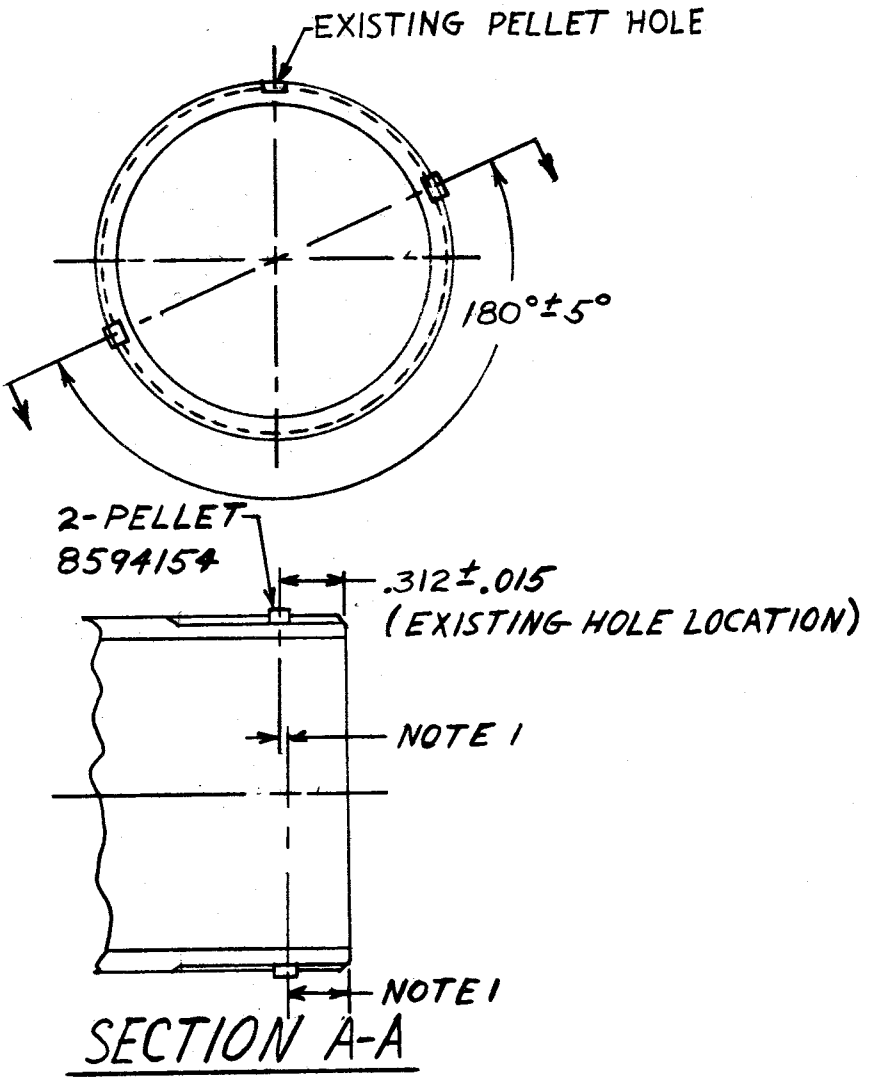

NOTE:
1. Variation in centerline location of pellet shall not exceed .032 in the direction as shown. (One half thread pitch).
2. All other requirements of Drawing C8593647 apply.

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.