INCH-POUND
MIL-DTL-62015G(AT)
30 August 1995
SUPERSEDING
MIL-C-62015F(AT)
24 August 1989

DETAIL SPECIFICATION

CARRIER, CARGO, FULL-TRACKED, M548A1 AND M548A3: PROCESSING FOR STORAGE AND SHIPMENT OF

This specification is approved for use by the US Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the processing of the carrier, cargo, full-tracked, M548A1 and M548A3; for domestic or overseas shipment, including carloading; meeting the requirements of levels A and B processing (see 1.2). All paragraphs within this specification are applicable to all models unless otherwise indicated (see 6.1).

1.2 Classification. Processing shall be of the following levels, as specified (see 6.2).

Level A - Maximum military protection. Level A is the processing required for the protection of vehicle during shipment, handling and storage in excess of 90 days from date of actual processing. This level does not provide for driveaway capability; it does provide for domestic or overseas shipment, including open deck loading.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E, Warren, MI 48397-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A AREA PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

Level B - Minimum military protection. Level B is the limited processing for the protection of vehicle during shipment, handling and storage not to exceed 90 days from date of actual processing. This level provides for driveaway capability, when specified, and domestic or overseas shipment (excluding open deck loading).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are needed to meet the requirements specified in sections 3, 4, and 5 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to assure the completeness of this list, document users are cautioned that they must meet all requirements. Documents cited in sections 3, 4, and 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

O-S-801	- Sulfuric Acid, Electrolyte (for Storage Batteries).
P-D-220	- Detergent, General Purpose.
TT-V-121	- Varnish, Spar, Water-resisting.
UU-P-268	- Paper, Kraft, Wrapping.
UU-T-81	- Tags, Shipping and Stock.
VV-L-800	- Lubricating Oil, General Purpose, Preservative (Water-displacing, Low Temperature).
ZZ-T-416	- Tire, Pneumatic: Retread and Repair Materials.
MMM-A-179	- Adhesive, Paper-Label, Water-resistant.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-621	- Box, Wood, Nailed and Lock-corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-97	- Tape, Packaging/Industrial, Filament Reinforced.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:22Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE

MIL-P-116	- Preservation, Methods of.
MIL-B-117	- Bags, Sleeves and Tubing.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-C-450	- Coating Compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-L-2105	- Lubricating Oil, Gear, Multipurpose (Metric).
MIL-C-5501	- Cap and Plug, Protective, Dust and Moisture Seal.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-B-11188	- Battery, Storage, Lead-Acid, General Specification for.
MIL-A-11755	- Antifreeze, Arctic Type.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application.
MIL-D-16791	- Detergent, General Purpose (Liquid, Nonionic).
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-in.
MIL-T-22085	- Tape, Pressure-Sensitive, Adhesive, Preservation and Sealing.
MIL-B-22191	- Barrier Material, Transparent, Flexible, Heat Sealable.
MIL-T-37402	- Tester, Antifreeze Solutions.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy-Duty, Single Package.
MIL-T-50036	- Talc, Technical, T1 and T3.
MIL-P-52905	- Paint, Camouflage, Removable.
MIL-A-53009	- Additive, Antifreeze Extender, Liquid Cooling System.
MIL-S-53021	- Stabilizer Additive, Diesel Fuel.
MIL-D-81298	- Dye, Liquid, for the Detection of Leaks in Aircraft Fuel Systems.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-2073	- DOD Materiel Procedures for Development and Application of Packaging Requirements.
MS35842	- Clamp, Hose, Low Pressure, Type "F".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTION

A-A-208	- Ink, Marking, Stencil, Opaque (Porous and Nonporous Surfaces).
A-A-374	- Sodium Bicarbonate.
A-A-883	- Tape, Pressure Sensitive Adhesive, Masking.
A-A-55057	- Panels, Wood/Wood Based; Construction and Decorative.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Documents Order Desk, 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DOCUMENTS

DEPARTMENT OF TRANSPORTATION (DOT)

Federal Motor Carrier Safety Regulations

(Application for copies should be addressed to the Department of Transportation, Bureau of Motor Carrier Safety, Washington, DC 20590.)

(Copies of drawings, publications, and other Government documents required by contractors in connections with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.3 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issue of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI 01 - Industrial Wire Cloth.

(Application for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A563 - Standard Specification for Carbon and Alloy Steel Nuts.
ASTM D3953 - Standard Specification for Strapping Flat Steel and Seals.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

ASSOCIATION OF AMERICAN RAILROADS PUBLICATIONS

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Applications for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago, IL 60605.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Level A.

3.1.1 First article. When specified (see 6.2) a sample processed vehicle shall be subjected to the first article inspections specified in 4.2.

3.1.2 Government furnished equipment (GFE). Unless previously accomplished, GFE (other than installed) shall be packaged, packed, and marked in accordance with the individual document for the specific item. GFE shall be stowed with basic issue items (BII).

3.1.3 Preservatives and atomized spray equipment. When atomized spraying of preservative oils is specified, compressed air supply lines shall be equipped with moisture separators every 50 feet or fraction thereof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.1.4 Processing records. Records of vehicle processing shall be maintained and shall be readily available for review by Government representatives.

3.1.5 Disassembly. Projecting parts whose removal will accomplish desired cube reduction and parts susceptible to damage and pilferage shall be removed from the vehicle. Removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. Bare metal surfaces of removed parts shall be preserved, packaged, and packed in accordance with MIL-STD-2073, and identified and stowed securely within the vehicle.

3.1.5.1 Matchmarking. Parts removed from the vehicle shall be matchmarked when necessary to facilitate reassembly. Matchmarking information shall be put on cloth shipping tags conforming to type A of UU-T-81 or on metal tags using waterproofed ink or paint, and attached to mating parts. The marked cloth shipping tags shall be waterproofed with varnish conforming to TT-V-121 or adhesive conforming to MMM-A-179.

3.1.6 Record forms. Two copies of DA Form 2258 shall be provided. Information shall include preservation accomplished and depreservation instructions. The Equipment Log Book Binder and one copy of DA Form 2258 (see 6.4) shall be placed in a bag conforming to type I, class B, style 2, 6 mil of MIL-B-117. The bag shall be closed by heat sealing and securely attached in driver's compartment of vehicle. The other copy of DA Form 2258 shall be waterproofed with adhesive conforming to MMM-A-179 or sealed in a plastic bag and securely attached in a conspicuous location on the exterior of the vehicle.

3.1.7 Cleaning and drying.

3.1.7.1 Interior of vehicle. Interior surfaces of vehicle shall be cleaned with a solution of detergent conforming to P-D-220 or type I of MIL-D-16791 and water. Solution temperature shall not exceed 210 degrees Fahrenheit (°F), and pressure shall not exceed 5 pounds per square inch (psi) measured 4 inches from the nozzle. After cleaning, cleaned surfaces shall be rinsed with clean water and dried. Care shall be taken during cleaning and rinsing operations to assure that no solution or water enters instruments, connections, or other components susceptible to water damage. Solution or water shall not accumulate and remain in cavities that cannot be drained. Vehicles with decals, markers, straps, and floor plates installed shall only be hand-cleaned with solution of P-D-220 or type I of MIL-D-16791 and water to prevent damage to these components. Cleaned surfaces shall be hand-rinsed and dried (see 4.6.2.1).

3.1.7.1.1 Cleaning and drying of battery supports and retainers. Battery supports and retainers shall be cleaned with a solution of one-half pound of sodium bicarbonate conforming to A-A-374 per gallon of water. After cleaning, cleaned surfaces shall be flushed with clean water, then thoroughly dried. Dried surfaces shall then be preserved in accordance with 3.1.8.2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

3.1.7.1.2 Cleaning and drying backrests and seats. Backrest and seat cushions shall be cleaned with a solution of detergent conforming to P-D-220, or type 1 of MIL-D-16791, in warm water. After cleaning, cushions shall be wiped with cloths saturated with clean water to remove cleaning solution. Care shall be taken not to saturate the cushions with cleaning solution or water. After rinsing, cushions shall be dried, then protected in accordance with 3.1.9.3.

3.1.7.2 Exterior of vehicle. The exterior of vehicle, including cargo bed, shall be cleaned using a solution of detergent conforming to P-D-220, or type 1 of MIL-D-16791, in warm water or steam. Cleaning shall remove all foreign matter. After cleaning, care shall be taken to avoid entry of water or steam into driver's or engine compartments (see 4.6.2.1).

3.1.8 Preservation.

3.1.8.1 Relubrication. The vehicle shall be lubricated after having been driven more than 75 miles or having been cleaned in accordance with 3.1.7.2, the vehicle shall be relubricated using materials conforming to drawings, specifications or to the lubrication order applicable to the vehicle. All exposed oil can points such as, but not limited to, levers, locking levers, locking bars, locking pins, pintle pins, hinge pins, hinges, strikers, wing nuts, door locks, hand-operated locking knobs, latches, linkages, and threaded ends of yokes and their related clevis pins shall be coated with lubricant conforming to VV-L-800. Excess Lubricant shall be removed after coating.

3.1.8.2 Preservation of battery supports and retainers. Top battery supports and retainers shall be preserved with compound conforming to MIL-C-450.

3.1.8.3 Transmission, transfer assembly, control differential, and final drives. The transmission shall contain lubricating oil conforming to grade 10 of MIL-L-21260 filled to operating level (see 3.2.1). The transfer assembly, control differential, and final drives shall contain lubricating oil conforming to Grade 10 or 30 as applicable, of MIL-L-21260 filled to operating level. DA Form 2258 shall be annotated with type and grade of lubricant used (see 3.1.6).

3.1.8.4 Cooling system. The cooling system shall be protected by one of the following procedures (see 4.6.2.3):

a. For shipment to, and storage in, areas where temperature drops below minus (-) 40°F, systems shall be protected as specified in 3.1.8.4.3.
b. For shipment and storage within the bounds of 30° north latitude and 20° south latitude, except continental United States, systems shall be protected as specified in 3.1.8.4.2.
c. For all other shipments, cooling systems shall be protected as specified in 3.1.8.4.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

NOTE: DA Form 2258 (see 3.1.6) shall be completed to indicate coolant used.

3.1.8.4.1 Water and antifreeze procedure. The cooling system shall be filled to operating level with a clean solution consisting of equal parts by volume of antifreeze (ethylene glycol) conforming to MIL-A-46153, and water. Engine shall be operated until a temperature has been reached that causes the thermostat to open, assuring complete mixing and even distribution of the antifreeze solution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH WATER AND ANTIFREEZE SOLUTION (ETHYLENE GLYCOL) IN EQUAL PARTS BY VOLUME - DO NOT DRAIN," shall be securely attached to radiator filler neck.

3.1.8.4.2 Water and corrosion inhibitor procedure. The cooling system shall be filled with clear water up to, but not including, the radiator upper tank. A corrosion inhibitor conforming to MIL-A-53009 shall be added in the proportion of 5 ounces of the inhibitor for each 10 quarts of water. The inhibitor shall be dissolved in 2 quarts of warm water. More water shall be added, if necessary, to fill radiator to operating level. A warning tag, bearing the information "COOLING SYSTEM DOES NOT CONTAIN ANTIFREEZE - FILLED WITH WATER AND INHIBITOR", shall be securely attached to radiator filler neck.

3.1.8.4.3 Arctic antifreeze compound procedure. The cooling system shall be filled to operating level with arctic antifreeze compound conforming to MIL-A-11755. The compound shall be used without dilution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH ANTIFREEZE (ARCTIC-TYPE) - DO NOT DRAIN," shall be securely attached to radiator filler neck.

3.1.8.5 Engine crankcase. The crankcase of compression ignition engines shall be filled to operating level with lubricating oil conforming to MIL-L-21260 of the seasonal grade specified on the applicable drawing, specification, or lubrication order (see 3.2.2). DA Form 2258 shall be annotated with the type and grade of lubricant used.

3.1.8.6 Compression ignition engine. The compression ignition engine preservation (see 4.6.2.4) shall be in accordance with 3.1.8.6.1 through 3.1.8.6.5 in an uninterrupted sequence with the following two exceptions (see 3.2.3):

a. Engine without turbochargers: Process per all paragraphs with the exception of 3.1.8.6.3.
b. Engines with turbochargers: Process per all paragraphs with the exception of 3.1.8.6.4.

3.1.8.6.1. Initial conditions. Prior to processing, the engine shall be cooled to assure that cylinder head temperature, measured at injector nozzle flange surface of all cylinders, is not more than 100°F. Cooling shall be accomplished by induced air currents, circulation of engine

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

coolant, or by waiting the period of time required to arrive at the above specified temperature. When the ambient temperature exceeds 100°F, engine shall be cooled to a temperature equivalent to the ambient temperature.

3.1.8.6.2 Fuel system and combustion chamber preservation. A portable container with a filtering device and regulator valve, shall be filled with preservative oil conforming to grade 1 of MIL-P-46002 to which has been added an oil soluble red dye conforming to MIL-D-81298, in a concentration sufficient to impart a marked coloring to the oil. Position container to allow gravity feed to the engine. Shut off fuel supply from the fuel tank. Disconnect the fuel pump supply line between the primary fuel filter and the fuel pump at the filter end. Connect this line to the auxiliary container containing preservative oil. Disconnect vehicle fuel return line at quick disconnect coupling. Connect transparent plastic fuel line to the engine end of the disconnected fuel return line. Place the other end of transparent fuel line into a recovery container to collect the return oil. Disconnect the air cleaner hose between the air cleaner and engine intake at the air cleaner outlet. Connect an air restrictor boot (Figure 1) to the engine air intake to completely shut off the supply of air to the engine. It is necessary to eliminate airflow into the engine in order to achieve effective preservation.

Place the engine fuel control in the "ON" position. Open the regulator valve on the auxiliary container. Crank the engine with the starter (NOTE: Engine may fire for approximately 5 seconds) for not less than 30 seconds and not greater than 45 seconds. If the red colored preservative oil is not observed with the 30- to 45-second period, rest the starter for a period of 3 minutes and repeat the cranking procedure.

CAUTION: Special precautions shall be taken to assure that time limits specified shall not be exceeded. Damage to the starter solenoid or hydrostatic lock of the engine may result.

Close the regulator valve on the auxiliary container and disconnect it from the fuel pump supply line. Reconnect the fuel pump supply line to the primary filter. Remove the transparent fuel line, and reconnect the vehicle fuel return at the quick disconnect coupling. Turn on the vehicle fuel supply system. Remove the air restrictor boot and reinstall the hose to the air cleaner (see 4.6.2.4).

3.1.8.6.3 Preservation through air intake and exhaust system, for engine without turbocharger. Atomize 1 ounce of preservative oil conforming to grade 1 of MIL-P-46002 into the exhaust opening. Seal with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085. Disconnect the hose at the air intake, and atomize 1 ounce of preservative oil, conforming to grade 1, MIL-P-46002, into the intake manifold. Seal the opening with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085 (see 4.6.2.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.1.8.13 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted metal surfaces on the exterior of the vehicle except the track shoes, shall be coated with compound conforming to grade 1 of MIL-C-16173. All exposed, unpainted, unplated metal surfaces on the interior of the vehicle shall be coated with compound conforming to grade 4 of MIL-C-16173.

3.1.9 Packaging.

3.1.9.1 Dry charged batteries and cables. Dry charged batteries shall be installed and secured in the vehicle battery carrier. Battery cables shall be secured to battery carrier with 3/4-inch tape conforming to type IV of PPP-T-97. Battery filler cap openings shall be sealed by placing a 2-inch wide by 3-mil thick piece of film conforming to type II of MIL-B-22191 over each filler cap opening with cap removed. The sheet shall be of sufficient length to allow it to be depressed into the opening to the same depth as the filler plug. Filler caps shall be screwed or inserted into opening to form a complete seal without damaging the sheet. If batteries have been processed in accordance with MIL-B-11188, they need not to be reprocessed as above.

3.1.9.2 Electrolyte. Electrolyte shall be packaged and packed in accordance with O-S-801, except that the exterior container shall conform to PPP-B-621, class 2 or PPP-B-601, overseas type. Marking shall be in accordance with O-S-801. The packed electrolyte shall be stowed in the same location as the BII and secured independently to permit separate removal.

3.1.9.3 Packaging of backrests and seats. Cushions of backrests and seats (see 3.1.7.1.2) shall be covered with paper conforming to grade B of UU-P-268 with a minimum basic weight of 60 pounds. Paper shall be secured with tape conforming to type I of A-A-883 (see 3.2.6).

3.1.9.4 Fire extinguishers. Fire extinguishers shall contain 90 percent of rated full charge. All seals shall be intact. DA Form 253 shall be completed and attached securely to each extinguisher (see 6.3).

3.1.9.5 BII, M548A1 and M548A3. If BII and Components of End Item (COEI) are not furnished as a GFE item, BII and COEI items shall then be processed in accordance with Table II. Methods of preservations as called out on tables shall be in accordance with MIL-P-116. Packing of items shall conform to the requirements of MIL-STD-2073. Stowage and securement of BII and COEI items shall be in accordance with 3.1.9.5.1.

3.1.9.5.1 Stowage and securement of BII. BII, COEI and items that have been removed from vehicle for shipment shall be identified to the pertinent vehicle by serial number. (NOTE: BII, COEI and items that have been removed for shipment shall not be identified to the pertinent vehicle by serial number, if vehicle has been rebuilt or revised at depot). BII and COEI shall be stored inside buildings, except during shipment. Packed BII, COEI and removed exterior vehicle

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

items shall be placed within the cargo compartment of the vehicle. Large wooden boxes shall be placed on the vehicle floor and shall be secured with 1-1/4 inch wide strapping conforming to type I, class "Heavy Duty" of ASTM D3953.

(NOTE: If BII, COEI and other containers are placed in fiberboard container and it has been determined 1-1/4-inch wide strapping will cause damage to containers, strapping width shall be reduced to 3/4-inch wide.)

Strapping shall be secured to holding devices within the compartment. Additional strapping may be required if 3/4-inch wide strapping conforming to type I, class "Heavy Duty" of ASTM D3953 is used. All containers shall be secured in such a manner as to prevent any movement during transit and to prevent damage to containers or vehicle interiors. Corner protectors shall be used under all strapping.

3.1.9.6 Tow hooks and tow pintle. Tow hooks, tow pintle, and attaching hardware shall be removed for shipment (see 3.2.8). Removed items shall be packaged in a type CF, class "weather-resistant" box conforming to PPP-B-636. The box shall be closed with tape conforming to type III, class 1, of PPP-T-60, identified as to contents, and securely stowed within the crew compartment.

3.1.9.7 Exhaust pipe. The exhaust pipe and attaching clamps shall be removed for shipment and packaged in a box conforming to type CF, class "weather-resistant" of PPP-B-636 (see 3.2.9). Box shall be closed with tape conforming to PPP-T-60, type III, class 1, identified as to contents, and securely stowed within the crew compartment.

3.1.9.8 Access plate, gasket, drain plugs. Access plate, gasket, preserved drain plugs shall be packaged in a box conforming to type CF, class "weather-resistant" of PPP-B-636. The box shall be closed with tape conforming to type III, class 1 of PPP-T-60, identified as to contents, and securely stowed within crew compartment (see 3.1.8.12.1).

3.1.9.9 Cab cover, windshield, and door windows (M548A1 only). Cab cover, windshield and door windows shall be removed for shipment and storage. Unpainted metal surfaces shall be coated with preservative conforming to MIL-C-16173, grade 4. Removed bolts, nuts, screws, pins and washers shall be placed in one of the mating parts and secured. Fabric cover shall be thoroughly dried, folded and placed in a container conforming to type CF, class "weather-resistant" of PPP-B-636. Box shall be closed with tape conforming to type III, class 1 of PPP-T-60. Windshield wipers shall be placed in a bag conforming to MIL-B-117, type I, class B, style 2, 4 mil. Rubber molding around windows shall be dusted with talc conforming to type

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:22Z
Check the source to verify that this is the currentversion before use.

IV, class C of ZZ-T-416 or talc, technical, MIL-T-50036. Packaged cab cover, windshield, door windows and windshield wipers shall be packed in a box conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. Items shall be blocked, braced and cushioned in container. Box shall be identified and stowed with BII.

3.1.9.10 Cargo cover installation (M548A1 only). Cargo cover installation, except tiedown hooks, shall be removed for shipment. Unpainted metal surfaces shall be coated with preservative conforming to MIL-C-16173, grade 4. Removed screws, nuts and washers shall be packaged separately in bag conforming to MIL-B-117, type I, class B, style 2, 4 mil, and placed within cover assembly container. The Cover assembly with ropes shall be thoroughly dried, folded and wrapped with barrier material conforming to MIL-B-121, type II grade A, class 2, and secured with tape PPP-T-60, type III, class 1. The stanchions shall then be placed with bows in wood box conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. Items shall be blocked, braced and cushioned in container. Box shall be identified and stowed with BII.

3.1.10 Vehicle closure.

3.1.10.1 Closure kit. Unless otherwise specified (see 6.2), each vehicle shall be provided with a protective closure kit. Closure kit shall be fabricated and installed in accordance with appendix A and figure 4 for M548A1 - M548A3 vehicles and appendix B.

3.2 Level B. Vehicles shall be processed in the same manner as specified for level A, with the following exceptions:

3.2.1 Transmission, transfer assembly, control differential, and final drives. Transmission, transfer assembly, control differential, and final drives shall contain operational lubricant as specified on applicable drawings, specifications, or lubrication orders, filled to operating level. If, however, these units contain lubricating oil conforming to type I, grade 10 or 30 of MIL-L-21260, an additional amount of the same oil shall be added to attain operating level. Operating lubricants shall not be mixed with MIL-L-21260 except in an emergency. DA Form 2258 shall be annotated to indicate the grade of operational lubricant or preservative oil used (see 3.1.8.3).

3.2.2 Engine crankcase. Engine crankcase shall contain normal operational lubricant as specified in lubrication order, filled to operational level. DA Form 2258 shall be annotated to indicate grade of lubricant used (see 3.1.8.5).

3.2.3 Engine preservation. The engine shall require no preservation for level B shipment and storage (see 3.1.8.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.2.4 Personnel heater and fuel pump. Personnel heaters and fuel pumps shall be in ready-to-use condition (see 3.1.8.7).

3.2.5 Residual fuel. Unless otherwise specified (see 6.2), vehicles shall be shipped without draining residual fuel from the fuel tanks. Diesel fuel stabilizer additive conforming to MIL-S-53021 shall be added to residual fuel in the fuel tank in accordance with the supplier's mixing instructions. Mixing instructions and the appropriate Material Safety Data Sheet must be read prior to handling the additives (see 3.1.8.8).

3.2.6 Backrests and seats. Cushions of backrests and seats may be covered or uncovered. If cushions are received packaged, they shall be stowed as received in the crew compartment (see 3.1.9.3).

3.2.7 Winch assembly. Winch gear shall be filled with operational lubricant. Cable shall not be preserved for level B shipment and storage (see 3.1.8.10).

3.2.8 Tow hooks and tow pintle. Tow hooks and tow pintle shall be removed for overseas shipment only (see 3.1.9.6).

3.2.9 Exhaust pipe. Exhaust pipe and clamps shall be removed and packaged for overseas shipment only (see 3.1.9.7).

3.2.10 Vehicle closure. Vehicle closure kit shall not be provided for level B shipment and storage. Opening to vehicle interior shall be sealed in accordance with appendix C, figure 6 for M548A1 - M548A3 vehicles.

3.3 Materials. Materials shall be as specified herein and in referenced specifications and drawings. Materials shall be free from all defects and imperfections that might affect the serviceability and appearance of the finished product (see 4.6.1).

3.3.1 Recycled, virgin and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 4.6.1).

3.4 Loading.

3.4.1 Loading on flat cars. Loading of vehicles on open top railroad cars shall be in accordance with the applicable requirements of Section 1, General Rules Governing the Loading of Commodities on Open Top Cars, and figure 87 or 87A, section 6, Rules Governing the Loading of Department of Defense Material on Open Top Cars, of the Association of American Railroads publication.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.2 Highway shipment. Loading of vehicles for shipment by haulaway and rules for shipment by driveaway or towaway shall be in accordance with Department of Transportation publication, "Federal Motor Carrier Safety Regulations," and applicable military publications.

3.4.3 Reprocessing engine after loading.

3.4.3.1 Level A. If engine is operated in connection with the moving of vehicle to loading area or during the loading itself, the engine shall be reprocessed as specified in 3.1.8.6 through 3.1.8.6.5.

3.4.3.2 Level B. If engine is operated in connection with movement of vehicle for loading and unloading, there shall be no additional processing of engine.

3.5 Marking. In addition to any special marking required in the contract (see 6.2), vehicle shall be marked in accordance with MIL-STD-129.

3.5.1 Lifting points. The legend "LIFT HERE" with arrow pointing to the lifting eye shall be stenciled adjacent to each lifting eye using black ink conforming to A-A-208.

3.6 Drive-on/drive-off capability. When vehicles are to be operated for loading and unloading (see 6.2), the following provisions shall apply:

3.6.1 Additional fuel. As specified (see 6.2), additional fuel shall be added, as required, to accomplish movement of vehicle.

3.6.2 Batteries and electrolyte. Batteries shall be filled with electrolyte, fully charged, and battery cables connected. After vehicle self-movement for loading or placement in storage, the ground cable at battery shall be disconnected and then secured to battery carrier with 3/4-inch tape conforming to type IV of PPP-T-97. A tag bearing the following message, "VEHICLE PRESERVED FOR DRIVE-AWAY CONDITION. BEFORE CRANKING, CONNECT GROUND CABLE TO BATTERY TERMINAL. ENGINE AND FUEL TANKS NOT PRESERVED", shall be located in a conspicuous place in the driver's compartment.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the currentversion before use.

4.2 First article inspection. When specified (see 6.2), one of the first ten production processed vehicles (see 3.1.1) shall be subjected to the inspections specified in 4.6. Approval of the first article sample by the Government shall not relieve the contractor of the obligation to process vehicles that are fully representative of the one inspected as a first article sample. Any changes or deviations of the production processed vehicles from the first article sample shall be subject to the approval of the contracting officer.

4.3 Conformance inspections. Unless otherwise specified (see 6.2), all production processed vehicles shall be subjected to the inspections specified in 4.6.2 through 4.6.2.4.

4.4 Failure. Failure of the first article, or any production processed vehicle, to conform to the applicable requirements of this specification shall be cause for rejection of the vehicles by the Government. No vehicles shall be accepted until objective evidence that the contractor has corrected the condition causing the failure has been provided to the Government. A complete or partial reinspection may be required by the procuring activity at the contractors expense to substantiate any implemented corrective action.

4.5 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed under the following conditions:

a. Temperature: 77 + 18°F.
b. Relative humidity: Uncontrolled room ambient.
c. Atmospheric pressure: Site pressure.

4.6 Methods of inspections.

4.6.1 Materials. Except for materials that have been inspected by the Government at source, all materials to be used in processing of vehicles shall be inspected in accordance with the applicable material specifications or shall be certified to comply with those material specifications (see 3.3). Recoverable materials shall conform to the same specifications (see 6.5.1). When materials are listed on a Qualified Products List (QPL), they shall be obtained from one of the approved sources indicated.

4.6.2 Processing. Except as otherwise specified herein, vehicle processing shall be inspected to determine conformance to this specification. Inspection of processing shall include all items specified in Table I and 4.6.2.1 through 4.6.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection - Continued.
(See indicated paragraphs for Levels A & B requirements.)

Component	Cleaning Levels A & B	Preservation		Packaging/Stowage	
		Level A	Level B	Level A	Level B
Stowage and securement of BII				3.1.9.5.1	3.1.9.5.1
Tow hooks				3.1.9.6	3.2.8
Exhaust pipe				3.1.9.7	3.2.9
Cab cover, windshield and door windows		3.1.9.9		3.1.9.9	3.1.9.9
Cargo cover installation		3.1.9.10		3.1.9.10	3.1.9.10
Vehicle closure kit				3.1.10.1	3.2.10
Loading on flat cars				3.4.1	3.4.1
Highway shipment				3.4.2	3.4.2
Reprocessing engine after loading				3.4.3.1	3.4.3.2
Marking				3.5	3.5
Lifting points				3.5.1	3.5.1

1/ Inspect DA Form 2258

4.6.2.2 Fuel tank. To determine conformance to 3.1.8.8, visual inspection of fuel tank interior shall assure that complete preservative application has been accomplished.

4.6.2.3 Cooling system. To determine conformance to 3.1.8.4, one processed vehicle shall be selected at random from each day's production. The engine coolant shall be tested using a hydrometer-thermometer type anti-freeze tester, with a range of minus 60°F to plus 160°F, conforming to MIL-T-37402.

4.6.2.4 Engine. To determine conformance to 3.1.8.6 through 3.1.8.6.6, the interior of the engine from one of the first ten production processed vehicles shall be examined for surface coverage. The engine shall be disassembled to the extent necessary to permit visual examination of all surfaces within the combustion chamber. (NOTE: The combustion chamber shall be considered as all surfaces within the cylinder, from and including the crown of the piston, to and including the surface of the head within the cylinder.) All surfaces within the combustion chamber shall have a "wet" coating or preservative oil such as is obtained when an item is dipped or flushed with the oil.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

This section is not applicable to this specification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Vehicle processing covered by this specification is intended to protect the vehicles for storage outside of buildings, for immediate use shipment, and for domestic or overseas shipment, including carloading (see 1.1).


6.2 Ordering data. Procurement documents must specify the following:

a. Title, number, and date of this specification.
b. Issues of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
c. Applicable level of processing (see 1.2).
d. If first article inspection is required (see 3.1.1).
e. Applicable procedure for protection of cooling system (see 3.1.8.4).
f. If BII should be processed, packed, or stored other than as specified (see 3.1.9.5).
g. If vehicle closure kit is required (see 3.1.10.1).
h. If residual fuel shall be drained from the fuel tank prior to shipping (see 3.2.5).
i. If special marking is required (see 3.5).
j. If vehicle should have drive-on, drive-off capability (see 3.6).
k. If additional fuel shall be supplied (see 3.6.1).
l. If first article samples size shall be other than as specified (see 4.2).
m. If production processed vehicles shall be subjected to inspections other than as specified (see 4.3).

6.3 Safety precautions. Caution should be exercised in handling carbon dioxide (CO_2) fire extinguisher cylinders. Cylinders should not be dropped, permitted to strike each other, or handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping the fire extinguisher control trigger (see 3.1.9.4).

6.4 Forms. A copy of the "Equipment Log Book" and all required forms (see 3.1.6) will be furnished to the contractor by the Government at least 30 days before shipment of the vehicles required by the contract delivery schedule.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the currentversion before use.

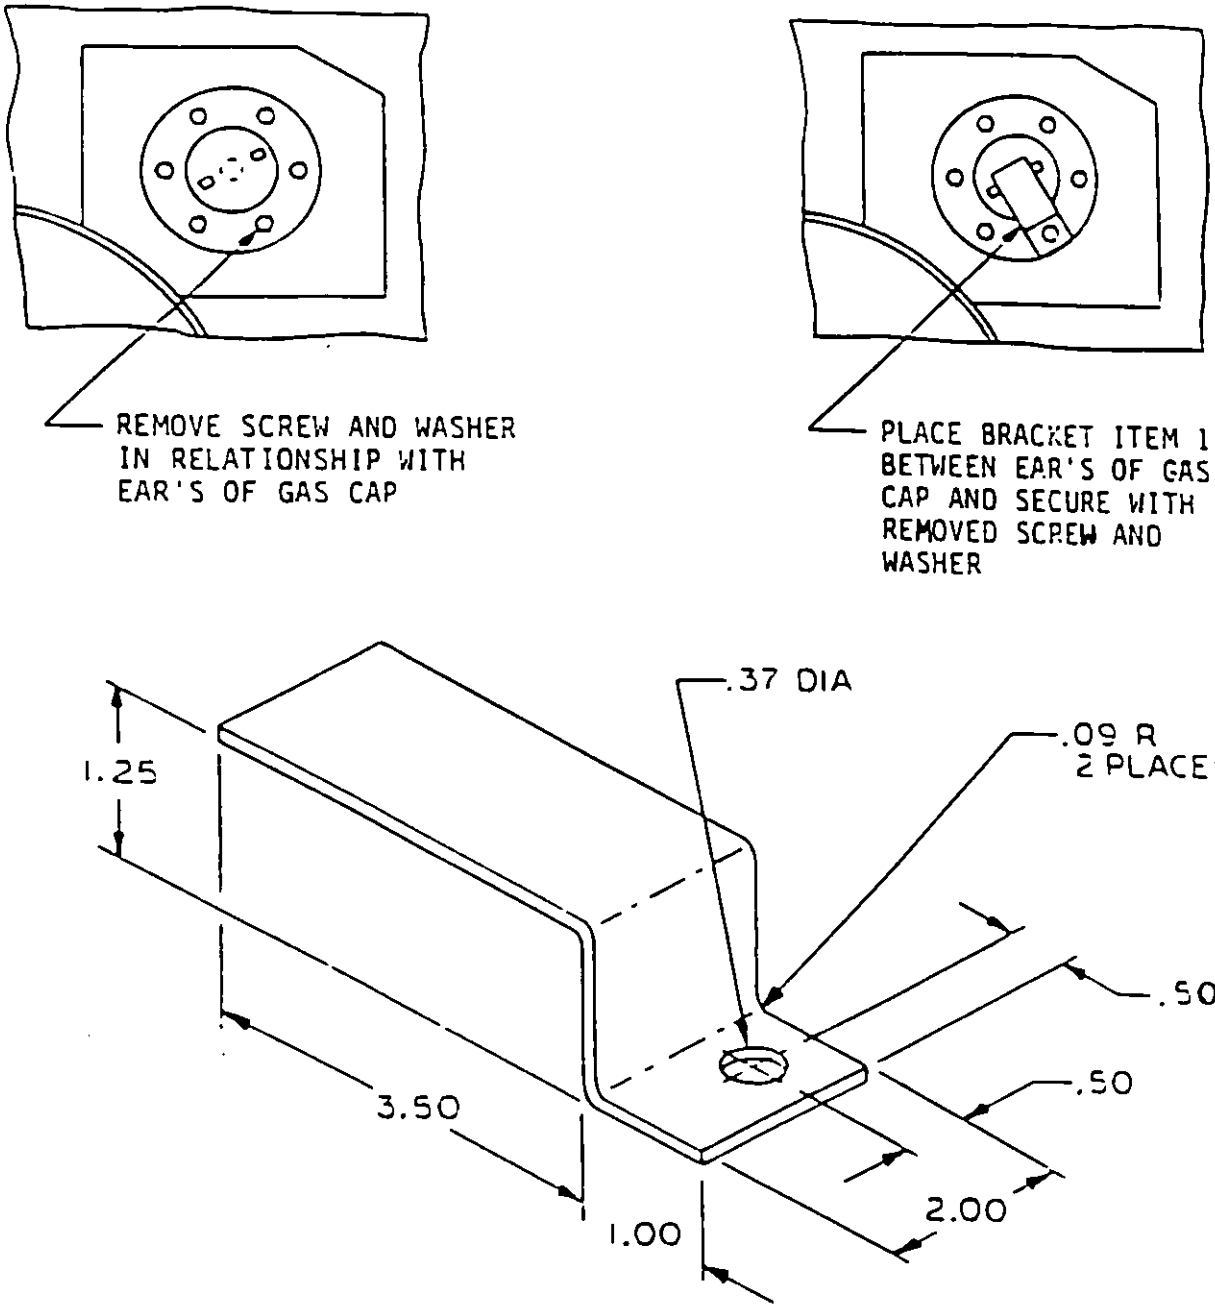


NOTES:

1. Material: Steel, Carbon, HR, ASTM A563, 0.125 thk. Preserve with MIL-C-16173 Grade 1.
2. Dimensions are in inches. Unless otherwise specified tolerances are ± .032 inch.

FIGURE 2. Bracket, fuel cap security.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

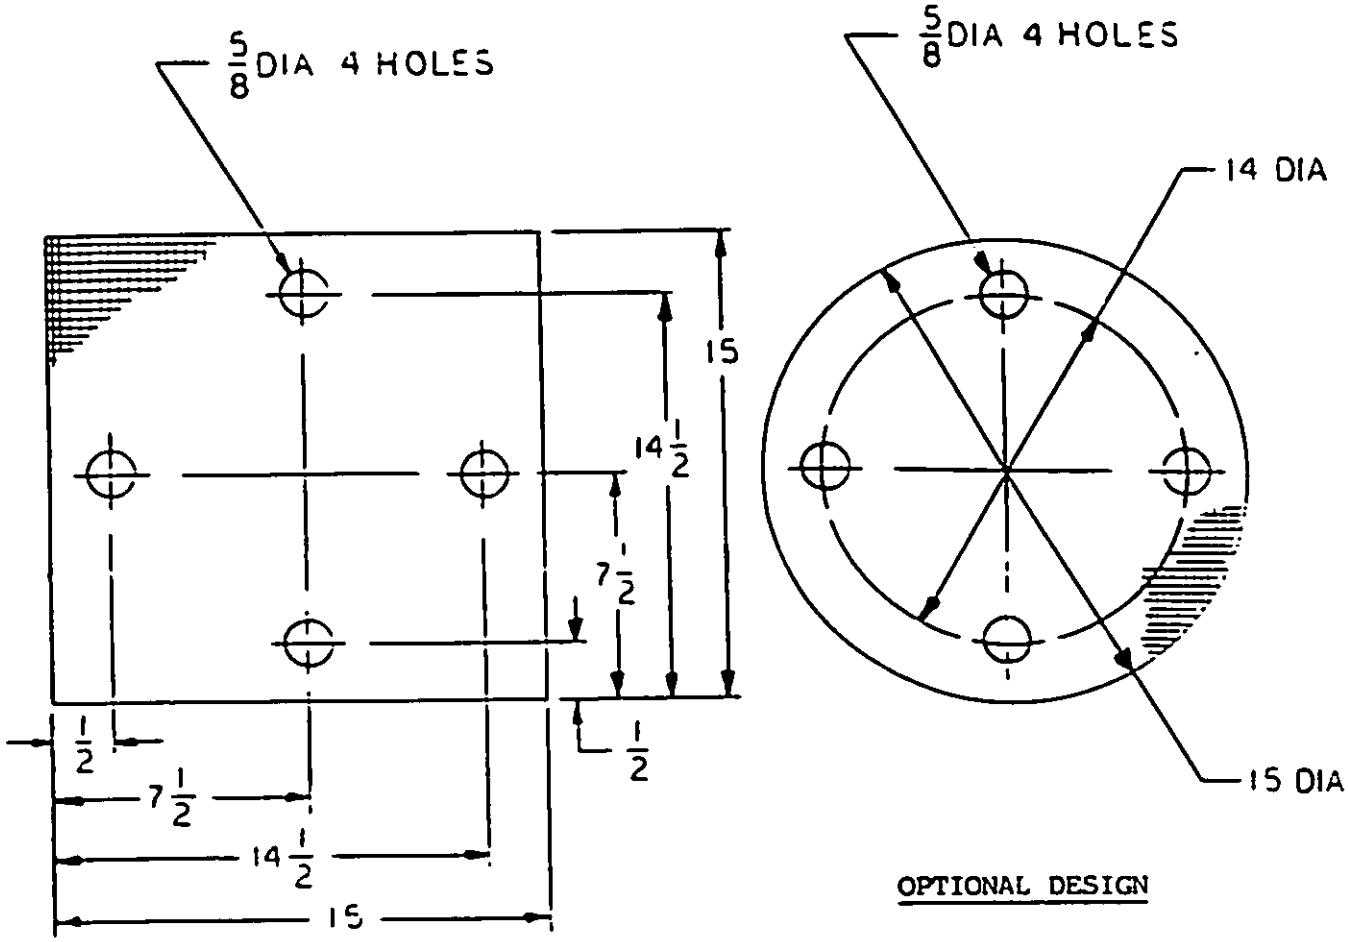

NOTES:

1. Material - Wire Cloth, Type I, Class 1, 4 X 4 Mesh, 0.0348 DIA, Per Spec ANSI 01.
2. Holes may be Formed with Drift Pin at Installation.
3. Dimensions are in inches. Unless otherwise specified tolerances are ± .032 inch.

FIGURE 3. Screen,.engine compartment access.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

TABLE II. Preservation Methods of: Basic Issue Items (BII) M548A1 and M548A3.

IDENTIFICATION NUMBER	ITEM DESCRIPTION	QTY	PRESERVATION METHOD
5120-00-240-6040	Crowbar, Pinch Point, 1" Wide. 48" Long (11677049)	1	I
5120-01-041-4624	Fixture Assy, Track Connecting (12253183)	2	I
5120-01-041-9920	Gage, Track & Sprocket (12253280)	1	IC-3
5120-00-265-7462	Hammer, Hand, Sledge, 6 lb. (41796)	1	I
5120-01-006-8847	Punch, Drive Pin (Track Pin Removal) (11678718)	1	I
2540-00-670-2459	Bag, Pamphlet, Canvas (7961712)	1	III
5140-00-473-6256	Bag, Tool, Satchel (11655979)	1	III
4030-01-369-7612	Shackle (12381884)	4	I
4010-00-767-3149	Cable, Tow (10861718)	1	I
7240-00-242-6153	Can, Water, Military, 5 Gal (11655980)	1	III
5110-00-595-8229	Cutter, Barbed Wire, Insulated Handles, Hand Operated (11655981)	1	IC-3
4930-00-288-1511	Extension, Adapter, Lube Access (6300333)	1	IC-3
6545-00-922-1200	First Aid Kit, Motor Vehicle, 12 Unit (11677011)	1	IC-2
4930-01-253-2478	Grease Gun, Hand, High Pressure, Lever Operated, 15 oz. Cap. 7000 PSI (10915142)	1	I
1005-00-487-4100	Cover, .50 Caliber Machine Gun (11631791)	1	III
2540-00-072-5927	Cover, Intake/Exhaust Grille (11612858)	2	III
7510-00-889-3494	Binder, Loose Leaf (11677003)	1	III
7510-01-065-0166	Folder, Equipment (43986-1)	1	III
L09-2350-247-12	Lubrication Order	1	III
TM9-2350-247-10	Technical Manual (Operator's)	1	III
5120-00-227-8074	Bar, Extension, ½" Drive, 10" Long (11655788-1)	1	IC-3
5120-00-061-8546	Hammer, Hand, Ball Peen, 2 Lb (11677028-3)	1	I

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

TABLE II. Preservation Methods of: Basic Issue Items (BII) M548A1 and M548A3 -Continued.

IDENTIFICATION NUMBER	ITEM DESCRIPTION	QTY	PRESERVATION METHOD
5120-00-236-7590	Handle, Socket Wrench, Hinged, ½" Drive (11655786-1)	1	IC-3
5120-01-119-4173	Pliers, Lineman's W/Side Cutter, Size 8" (11655790)	1	IC-3
5120-00-223-7397	Pliers, Slip Joint, Straight Nose, Combination, W/Cutter, Thin, Size 8" (11655775-3)	1	IC-3
5120-00-234-8913	Screwdriver, Cross Tip, No. 2 (11655777-12)	1	IC-3
5120-00-144-5207	Adapter, Socket Wrench, 3/4" X ½" Female (11655788-3)	1	IC-3
5120-00-278-1283	Screwdriver, Flat Tip, Common, Flared Side, Plastic Handle, 6" Blade (11655777-11)	1	IC-3
5120-00-189-7932	Socket, ½" Drive (12 pt), 9/16" Opening (11677025-1)	1	IC-3
5120-00-189-7946	Socket, ½" Drive (12 pt), 5/8" Opening (11677025-2)	1	IC-3
5120-00-235-5870	Socket, ½" Drive (12 pt), 11/16" Opening (11677025-3)	1	IC-3
5120-00-189-7985	Socket, ½" Drive (12 pt), 3/4" Opening (11677025-4)	1	IC-3
5120-00-189-7934	Socket, ½" Drive (12 pt), 7/8" Opening (11677025-5)	1	IC-3
5120-00-189-7935	Socket, ½" Drive (12 pt), 15/16" Opening (11677025-6)	1	IC-3
5120-00-264-3796	Wrench, Adjustable, 1-5/16" Jaw Opening, Size 12" (11655778-5)	1	IC-3
5120-00-244-3141	Wrench Box, Double Head, (12 pt) 5/8" & 11/16" Openings (11655785-2)	1	IC-3
5120-00-277-2342	Wrench, Engineers, Open End, Double Head, 3/8" & 7/16" Opening, 4" Long (11655789-1)	1	IC-3
5120-00-187-7126	Wrench, Engineers, Open End, Double Head, 9/16" & 5/8" Openings, 6" Long (11655789-2)	1	IC-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

TABLE II. Preservation Methods of: Basic Issue Items (BII) M548A1 and M548A3 -Continued.

IDENTIFICATION NUMBER	ITEM DESCRIPTION	QTY	PRESERVATION METHOD
5120-00-277-8300	Wrench, Engineer's, Open End, Double Head, 11/16" & 13/16" Openings, 7 ½" Long(11655789-3)	1	IC-3
5120-00-293-2336	Axe, Single Bit, 4 LB. 36" Long (6150925)	1	III
5120-00-288-6574	Handle, Mattock Pick (11677021)	1	III
5120-00-243-2395	Pick, Mattock (11677022)	1	III
5120-00-293-3336	Shovel, Round Point, D-Handle, Open Back (11655784)	1	III
4210-00-270-4512	Fire Extinguisher, Portable (7359703)	1	III
7714780	Optional: Fire Extinguisher, Portable		
4930-00-262-8868	Oiler, Hand Pump (6169931)	1	I

TABLE II a. Preservation Methods of: Components of End Items M548A1 and M548A3.

IDENTIFICATION NUMBER	ITEM DESCRIPTION	QTY	PRESERVATION METHOD
2540-00-679-8035	Tow Hook (10861607)	2	III
5315-00-862-2683	Pin, Straight, Headed (10890323)	2	III
5315-00-598-5808	Clip, Retaining (7752865)	2	IC-3

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX A

REQUIREMENTS FOR ASSEMBLY, INSTALLATION AND REMOVAL OF VEHICLE CLOSURE FOR M548A1-M548A3 VEHICLES

10. SCOPE.

10.1 Scope. This appendix covers requirements for assembly, installation and removal of the vehicle closure for M548A1-M548A3 vehicles only (see Figure 4). This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS

20.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this appendix to the extent specified herein.

SPECIFICATIONS

FEDERAL

RR-W-360	- Wire, Fabric, Industrial.
TT-E-527	- Enamel, Alkyd, Lusterless.
TT-P-636	- Primer Coatings, Alkyd, Wood and Ferrous Metal.

DEPARTMENT OF DEFENSE

MIL-R-3065	- Rubber, Fabricated Products.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MS16992	- Bolt (Screw), Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat (Round, Steel, Cadmium Plated) General Purpose.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX A

MS51967	- Nut, Plain, Hexagon, Carbon Steel, Cadmium Plated, UNC-2B (in/mm).
MS51968	- Nut, Plain, Hexagon, Carbon Steel, Cadmium Plated, UNF-2B (in/mm).
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNC-2A.

20.2 Other publications. The following documents form a part of this appendix to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-A36/A36M	- Standard specification for Structural Steel.
ASTM-A576	- Standard Specification for Steel Bars, Carbon, Hot-Wrought Quality.
ASTM-A675/A675M	- Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

30. REQUIREMENTS.

30.1 Vehicle closure.

30.1.1 Installation of closure, M548A1 - M548A3 vehicles.

a. Install two studs, Table III, Item 17, into the two 0.50 inch diameter threaded holes in the top of the vehicle side panels at the engine compartment bulkhead.
b. Place closure on vehicle with the 0.75 inch diameter hoses at the rear located on the studs installed in step a. The two 0.63 inch diameter holes in the forward support are to be located over the windshield mounting holes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

c. Place a rubber washer, Table III, Item 22, and a steel washer (MS27183-19), Item 21, over each of the studs installed in step a. Install nut (MS51968-14), Item 24, on each of the studs and torque securely.
d. Place a steel washer (MS27183-15), Item 20, on each of the two screws (MS90725-74), Item 18, to be next to the screw head. Place rubber washer, Item 22, on each of the screws.

Install screws with washers through the 0.63 inch diameter holes in the forward support and through the windshield mounting holes in the vehicle. Install steel washer (MS27183-15), Item 20, onto each of the screws. Install nut (MS51967-8), Item 23, on each of the screws and torque securely.

30.1.2 Removal of closure.

a. Remove the nuts and washers from the two screws through the closure forward support and the vehicle windshield mounting holes. Withdraw the screws with the remaining washers.
b. Remove the nuts and washers from two studs at the rear of the closure.
c. The closure is now free to be lifted from the vehicle. Remove the closure from the vehicle.
d. After removal of the closure, remove the two studs at the rear of the engine compartment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.


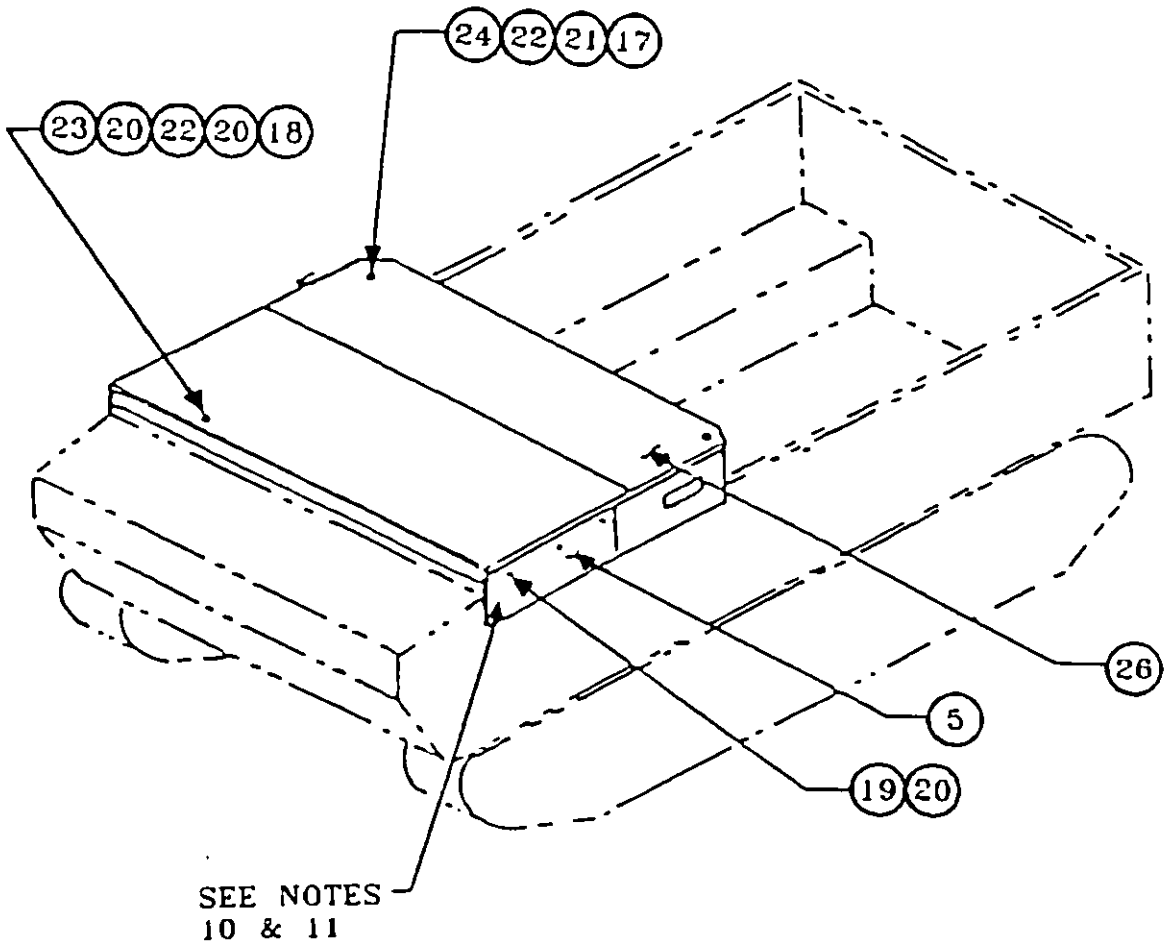


FIGURE 4. Vehicle closure M548A1 - M548A3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

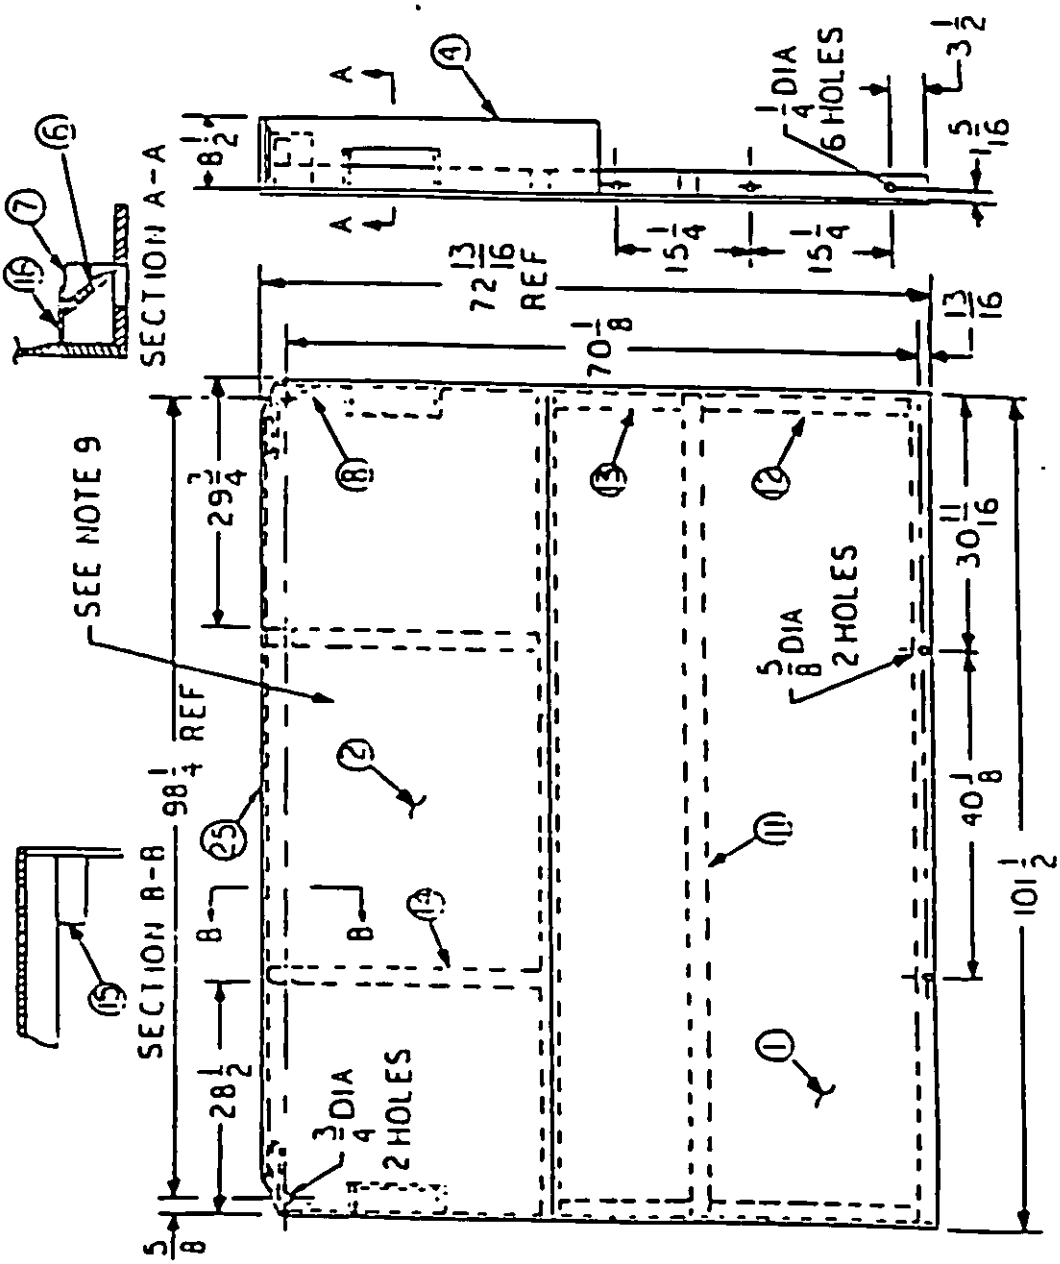

DETAIL 9

NOTES:

1. Dimensions are in inches. Unless otherwise specified tolerances are ± .032 inch.

FIGURE 4. Vehicle closure, M548A1 - M548A3 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX A

TABLE III. Vehicle closure, M548A1 - M548A3.

Item	Part Name	No Req	Description	Material
1	Top Front	1	0.50 X 42.06 X 101.50	See Note 1
2	Top Rear	1	See Detail 1	See Note 1
3	Back Panel	1	0.50 X 8.50 X 93	See Note 1
4	Side Panel	2	See Detail 2	See Note 1
5	Side Panel	2	See Detail 4	See Note 1
6	Deflector	2	See Detail 3	See Note 1
7	End Panel	4	0.50 X 2.75 X 5	See Note 1
8	Block	2	0.50 X 6.63 X 4	See Note 1
9	Block	2	0.50 X 6.63 X 7.25	See Note 1
10	Block	2	0.38 X 6.63 X 4	See Note 1
11	Support	3	2 Nom X 2.63 X 100.50	See Note 2
12	Spacer	2	2 Nom X 2.63 X 23.25	See Note 2
13	Spacer	2	2 Nom X 2.63 X 15	See Note 2
14	Spacer	2	2 Nom X 2.63 X 29.56	See Note 2
15	Block	2	2 Nom X 2.63 X 2.75	See Note 2
16	Screen Vent	2	See Detail 6	See Note 3
17	Stud	2	See Detail 7	See Note 4
18	Screw	2	0.38-16 X 4 UNC-2A	MS90725-74
19	Bolt Lag	6	0.38 X 2 Steel	MS16992-543
20	Washer	10	.44 ID X 1.00 O.D.	MS27183-15
21	Washer	2	.56 ID X 1.38 O.D.	MS27183-19
22	Washer	4	See Detail 8	See Note 5
23	Nut	2	0.38-16 UNC-2B	MS51967-8
24	Nut	2	0.50-20 UNF-2B	MS51968-14
25	Rear Assy	1	See Detail 5	----
26	Cover Assy	1	See Detail 9	----

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX A

NOTES:

1. Plywood, Spec A-A-55057, Type A, Standard Interior With Exterior Glue.
2. Lumber, Standard MIL-STD-731, Group I or II.
3. Wire cloth, steel carbon 0.0348 Dia 4 X 4 mesh Type I, Class I, Spec RR-W-360.
4. Steel, Structural, Carbon, ASTM A36/A36M, or Bars ASTM A576, Steel Bars, Carbon, Quality or Steel Bars, Carbon, Special Quality ASTM A675.
5. Rubber, Grade SB515 A1 B1 C1 Spec MIL-R-3065.
6. Items 3, 9, & 10 shall be laminated together with waterproof glue.
7. All unpainted metal parts (except nails) shall be coated with MIL-C-16173, Grade 1.
8. Nailing shall conform to Spec PPP-B-621.
9. Finish Exterior surfaces.


   Clean per process C-1, MIL-P-116.

   Apply primer, Composition Optional, Spec TT-P-636 0.75 to 1.25 mils thick.

   Apply enamel, olive drab, no. 34087, Composition Optional, Spec TT-E-527.
10. Paint used for marking shall conform to Spec TT-E-527. Color yellow no. 33538.
11. Stencil on removable panel at left door "TO SET OR RELEASE BRAKES - REMOVE THIS PANEL".
12. Dimensions are in inches.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX B

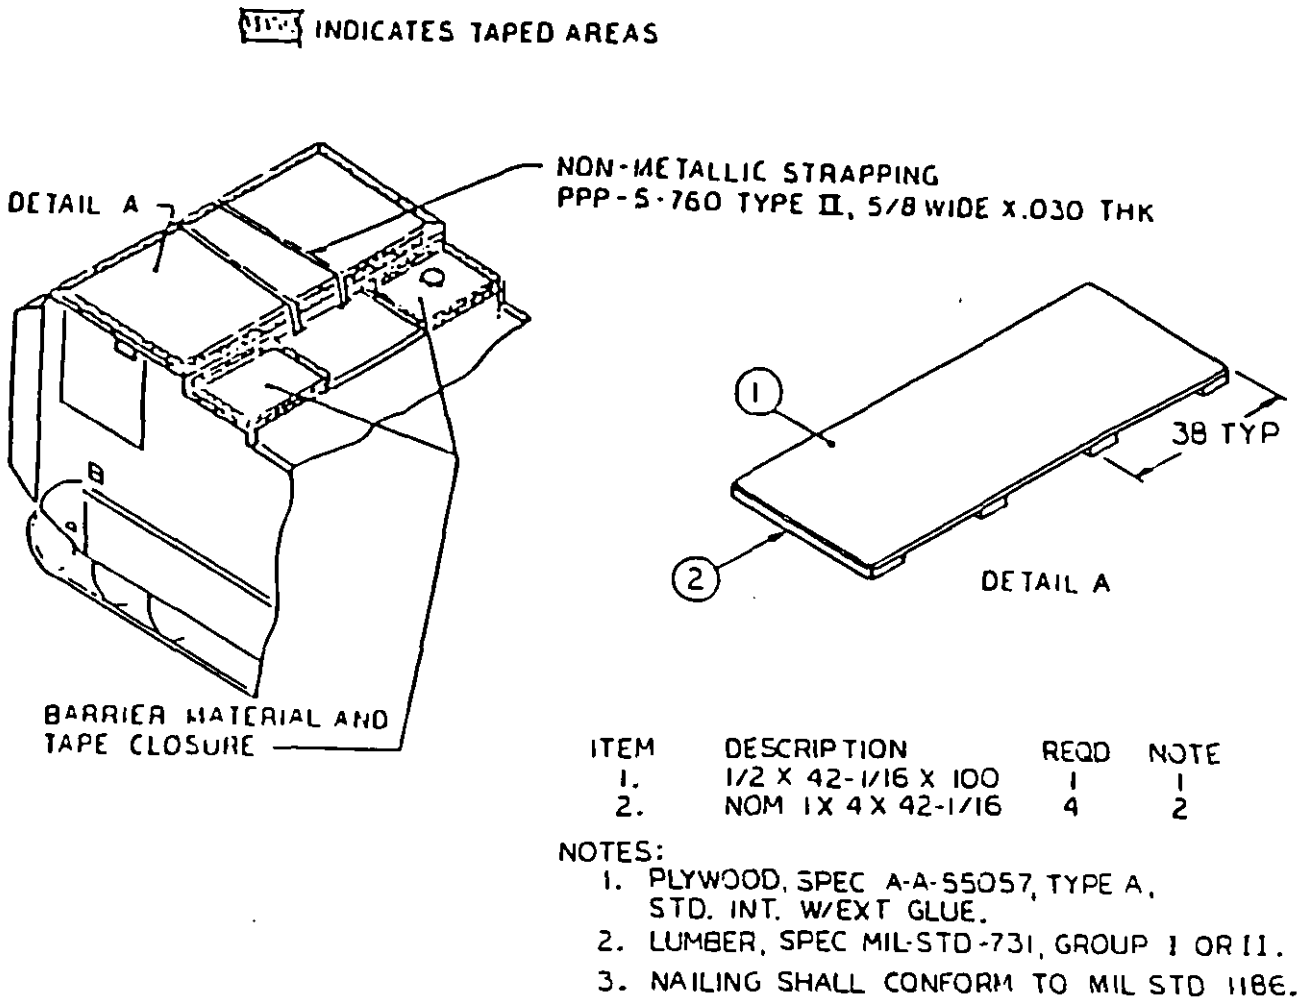

ITEM	DESCRIPTION	REQD	NOTE
1.	1/2 X 42-1/16 X 100	1	1
2.	NOM 1X 4X 42-1/16	4	2

NOTES:
1. PLYWOOD, SPEC A-A-55057, TYPE A, STD. INT. W/EXT GLUE.
2. LUMBER, SPEC MIL-STD-731, GROUP I OR II.
3. NAILING SHALL CONFORM TO MIL STD 1186.

NOTES:

1. Dimensions are in inches. Unless otherwise specified tolerances are ± .032 inch.

FIGURE 5. Level B Closure (M548A1 - M548A3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project PACK-A389)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-62015G(AT)	2. DOCUMENT DATE (YYMMDD) 950830

3. DOCUMENT TITLE
Carrier, Cargo, Full-Tracked, M548A1 and M548A3: Processing for Storage and Shipment of

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON
c. ADDRESS (*Include Zip Code*) Commander U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.