MILITARY SPECIFICATION

STARTER-GENERATOR: 300 AMPERE, 28 VOLTS, DIRECT CURRENT

1. SCOPE

1.1 This specification covers the 300 ampere, 28 volt, direct current starter-generator. This dual purpose unit is belt driven, open construction and not submersible.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

FF-B-171	- Bearings, Ball, Annular (General Purpose).
TT-C-490	- Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-485	- Enamel, Semigloss, Rust-inhibiting.
TT-P-636	- Primer Coating, Alkyd, Wood and Ferrous Metal.

Military

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-C-5541	- Chemical Films and Chemical Film Materials for Aluminum and Aluminum Alloys.
MIL-P-8585	- Primer Coating, Zinc Chromate, Low-Moisture-Sensitivity.
MIL-A-8625	- Anodic Coatings, for Aluminum and Aluminum Alloys.

STANDARDS

Federal

FED. STD. No. 595	- Colors

FSC 2920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	-	Identification Marking of US Military Property.
MIL-STD-461	-	Electromagnetic Interference Characteristics, Requirements for Equipment.
MIL-STD-462	-	Electromagnetic Interference Characteristics, Measurement of.
MIL-STD-810	-	Environmental Test Methods.

DRAWINGS

Army

10919292	-	Starter-Generator, 300 AMPS, 28 Volt.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS
Handbook H28 Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C. 20402).

3. REQUIREMENTS

3.1 First article sample. The sample of the starter-generators to be furnished under this specification shall be produced prior to the manufacture of these items in production quantity. The manufacturer shall subject these starter-generators to the first article inspection specified herein, to determine conformance to the quality assurance provisions of this specification (see 4.2). The first article sample shall be fully representative of the starter-generators to be supplied from production facilities and tooling.

3.2 Design and construction. The starter-generators shall conform to Drawing 10919292.

3.2.1 Interchangeability. To provide for interchangeability, the starter-generators fabricated in accordance with this specification shall have external dimensions that fall within the envelope outline of Drawing 10919292. Electrical connectors, mounting dimensions, and location shall also conform to the detail requirements of the drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.2.2 Materials. Materials shall be as specified herein, on applicable standards or drawings, and in applicable specifications.

3.2.3 Dissimilar metals. Except where necessary to complete an electrical circuit, contact between dissimilar metals, which would encourage galvanic action, shall be avoided. Separation of dissimilar metals shall be accomplished by providing insulation between mating surfaces.

3.2.4 Standard parts. Military standard parts shall be used whenever possible.

3.2.5 Threaded surfaces. All screw threads shall conform to Handbook H28 (see 2.2). The thread form, class and the number of threads-per-inch shall be as specified on the applicable standards or drawings.

3.2.6 Bearings. Bearings included in starter-generators shall meet the requirements of FF-B-171 together with any additional requirements specified on applicable standards or drawings.

3.2.7 Polarity. The starter-generators shall be designed to operate with a negatively-grounded electrical circuit.

3.2.8 Weight. The total weight of the starter-generator shall not exceed 70 pounds.

3.3 Performance.

3.3.1 Output. When tested as specified in 4.5.2, the starter-generators shall meet the performance requirements specified on Drawing 10919292.

3.3.1.1 Output check point (heat stabilized). When tested as specified in 4.5.2.1, the starter-generators shall subsequently meet the requirements at the one checkpoint indicated on figure 1.

3.3.1.2 Output, quality conformance. When tested as specified in 4.3.3.1, the maximum speed at cut-in with no load shall be no more than 3500 revolutions per minute (rpm), maximum speed at 100 amperes (amps) shall be no more than 3600 rpm and maximum speed at 300 amps shall be no more than 4200 rpm.

3.3.1.3 Starter output. When tested as specified in 4.5.4, the starter shall develope a minimum of 20 pound feet (lb. ft.) torque with current limited to 500 amps at 16 volts and 1300 rpm, and a minimum of 12 lb. ft. torque at 300 amps, 16 volts and 1600 rpm. Locked rotor torque at 16 volts shall be not less than 40 lb. ft.

3.3.2 Endurance. When tested as specified in 4.5.3, starter-generators shall deliver rated output for 1,000 hours. During this time, the starter-generators shall require no servicing or replacement of parts. The starter-generators shall subsequently meet the requirements of 3.3.1.1.

3.3.3 Overspeed. When tested as specified in 4.5.5, the starter-generators

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

shall evidence no thrown solder, thrown impregnating compound, damaged insulation, raised armature windings, raised commutator bars, or other damage.

3.3.4 High temperature. When tested as specified in 4.5.6, the starter-generators frame temperature shall not exceed 320°F and the starter-generators shall evidence no thrown solder, thrown impregnating compound, damaged insulation, raised armature windings, raised commutator bars or other damage. The starter-generators shall subsequently meet the requirements of 3.3.1.1.

3.3.5 Low temperature. When tested as specified in 4.5.7, the starter-generators shall evidence no damage. The starter-generators shall subsequently meet the requirements of 3.3.1.1.

3.3.6 Dielectric strength. When tested as specified in 4.5.8, the insulation shall evidence no loosening, cracking, charring, burning, smoking, or reduction in dielectric strength.

3.3.7 Shock resistance. After testing as specified in 4.5.9, the starter-generators shall evidence no breakage, loosened or distorted parts, or other physical damage and shall subsequently meet the requirements of 3.3.1.1.

3.3.8 Vibration resistance. After testing as specified in 4.5.10, the starter-generators shall evidence no breakage, loosening of parts, abrasion, or other physical damage and subsequently meet the requirements of 3.3.1.1.

3.3.9 Electromagnetic interference. When tested as specified in 4.5.11, the starter-generators shall provide interference reduction in accordance with the requirements for class IIC equipment of MIL-STD-461.

3.3.10 Corrosion resistance. After testing as specified in 4.5.12, the starter-generator shall meet the requirements of 3.3.1.1.

3.3.11 Fungus resistance. When tested as specified in 4.5.13, the starter-generator shall evidence no microbial growth that will adversely affect performance and shall subsequently meet the requirements of 3.3.1.1.

3.4 Painting. All exterior surfaces of the starter-generators shall be painted, except the electrical connections and the extended shaft. No paint shall be applied to mating surfaces.

3.4.1 Ferrous surfaces. Ferrous metal surfaces shall be cleaned in accordance with applicable method specified in TT-C-490. The cleaned surfaces shall be treated in accordance with type I or type III of TT-C-490. Exterior surfaces shall be given one coat of primer conforming to MIL-P-8585, 0.40 to 0.60 mil thick. The finish coat shall be olive drab enamel conforming to TT-E-485, type IV, color no. X24087 of FED. STD. No. 595.

3.4.2 Aluminum alloy surfaces. Aluminum surfaces shall be cleaned and treated

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

in accordance with MIL-C-5541 or anodized in accordance with MIL-A-8625. Exterior surfaces shall be given one coat of primer conforming to MIL-P-8585, 0.40 to 0.60 mil thick. The finish coat shall be olive drab gloss enamel conforming to TT-E-485, type IV, color no. X24087 of FED. STD. No. 595.

3.4.3 Zinc and cadmium surfaces. Exterior zinc and cadmium surfaces shall be given one coat of primer conforming to MIL-P-8585, 0.40 to 0.60 mil thick. The finish coat shall be olive drab gloss enamel conforming to TT-E-485, type IV, color no. X24087 of FED. STD. NO. 595.

3.5 Identification of product.

3.5.1 Marking. Marking for identification shall be in accordance with MIL-STD-130.

3.5.2 Nameplate. The starter-generator shall have a nameplate affixed to the exterior of the frame in a location specified on the drawings (see 3.2). The nameplate shall conform to the non-dimensional requirements of MIL-P-514. All nameplates shall include the following information as a minimum:

Starter-generator, 28 Volts DC.
300 amperes.
Military part number.
Federal stock number.
Manufacturer's serial number.
Manufacturer's identification.
US

3.5.3 Permanent mark. When specified (see 6.2), the military part number required on the nameplate shall be permanently inscribed on the starter-generator's frame in such location as to be covered by the nameplate.

3.6 Workmanship. The workmanship shall be such as to assure a product free of rust, burrs, and scratches. All electrical connections shall be mechanically secured before being soldered or brazed, to preclude the possibility of becoming loose due to vibration or shock.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. The first article sample shall consist of three starter-generators. First article inspection and testing shall be performed by the contractor under Government surveillance and shall consist of examination for defects specified in table II and performance of tests specified in table I.

4.2.1 Failure. Failure of a first article sample to pass any of the examinations or tests specified herein, may be cause for the Government's refusal to witness additional examinations or tests until the faults revealed have been corrected.

Table I. Order of first article testing.

Specimen	Para. No.	Test
1	4.5.8	Dielectric strength
	4.5.2	Output
	4.5.5	Overspeed
	4.5.6	High temperature
	4.5.7	Low temperature
	4.5.10	Vibration
	4.5.9	Shock resistance
2	4.5.12	Corrosion resistance
	4.5.13	Fungus resistance
	4.5.11	Electromagnetic interference
	4.5.2	Output
3	4.5.8	Dielectric strength
	4.5.2	Output
	4.5.5	Overspeed
	4.5.6	High temperature
	4.5.7	Low temperature
	4.5.3	Endurance

4.3 Quality conformance inspection.

4.3.1 Sampling for starter-generators.

4.3.1.1 Lot formation. A lot shall consist of all starter-generators from an identifiable production period, from one manufacturer submitted at one time for quality conformance inspection.

4.3.1.2 Sampling for quality conformance examination. Samples for quality conformance examination shall be selected in accordance with MIL-STD-105 and subjected to the examinations specified in table II.

4.3.2 Examination inspection.

4.3.2.1 Acceptable quality level. Each starter-generator selected in accordance

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

with 4.3.1.2 shall be examined for conformance to the following acceptable quality levels (AQL) on the basis of percent defective.

Classification	AQL
Major	1.0
Minor	2.5

Table II. Classification of defects.

Categories	Defects	Method of Insp.
Major		
101	Dimensions affecting interchangeability (see 3.2.1)	Standard equipment
Minor		
201	Dimensions not affecting interchangeability (see 3.2.1)	Standard equipment
202	Improper finish (see 3.4)	Visual
203	Improper marking (see 3.5)	Visual
204	Poor workmanship (see 3.6)	Visual

4.3.3 Testing inspection.

4.3.3.1 Output, quality conformance. To determine conformance to 3.3.1.2, each starter-generator submitted for acceptance shall be operated at 28 volts and the following speeds determined:

1. Cut-in speed with no load.
2. Minimum speed that will produce 100 amps.
3. Minimum speed that will produce 300 amps.

4.4 Control tests.

4.4.1 Sampling for control tests. Control test samples shall be selected at the rate of two starter-generators for every 250 produced (or portion thereof), except that not more than four starter-generators shall be selected in any 30 day period. Samples shall be from a production lot which has passed the quality conformance examination specified in 4.3.2 and quality conformance tests specified in 4.3.3.

4.4.2 Procedure. Control test samples shall be identified as to production period and subjected to the tests specified in table III.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the currentversion before use.

Table III. Control tests in sequence.

Paragraph	Test
4.5.8	Dielectric strength
4.5.2	Output
4.5.5	Overspeed

4.4.3 Failure. Failure of a control test sample to pass any specified examination or test may be cause for the Government to refuse to accept subsequent lots until it has been proved to the satisfaction of the Government that the faults revealed by the tests have been corrected.

4.5 Test procedures.

4.5.1 General.

4.5.1.1 Conditions. Tests shall be conducted under general laboratory conditions acceptable to the Government. The ambient room temperature shall be maintained at 77° ± 15°F. The specimens shall be stabilized for one hour before being subjected to the tests. Readings shall be corrected for variations in the ambient temperature by use of the following formula:

$$\text{Output (corrected)} = \frac{\text{Output (observed)}}{1 + .00214\,(77-T)}$$

Where T = ambient temperature °F.

4.5.1.2 Apparatus. In addition to standard measuring equipment (see table VI, figure 1 and applicable test specifications), test apparatus shall include chambers for conducting low temperature (-80°F), and high temperature (+200°F).

4.5.1.3 Calibration of test equipment. Test equipment accuracy shall be such as to permit measurement of 10 percent of product or test specification tolerance. Records of calibration of test equipment at intervals sufficient to establish required accuracy shall be made available to the Government. The inspector may refuse to conduct an inspection, where accuracy of test equipment has not been established to the satisfaction of the Government. Standard measuring instrument tolerance accuracies are listed in tables IV and V.

Table IV. Measuring instrument tolerances for first article tests.

Measuring instrument	Accuracy
Voltmeter DC	± 0.25 percent (28 volts-full scale)
Ammeter DC	± 0.50 percent (500 amps-full scale)
Tachometer	± 1 percent
Thermocouple system	± 2 percent (400°F full scale)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Table V. Calibration of quality conformance and control test instrumentation

Measuring instrument	Accuracy
Voltmeter DC	± 0.15 Volts
Ammeter DC	± 2.50 Amps
Tachometer	± 50 RPM at 1,800 RPM ± 200 RPM at 10,000 RPM
Thermocouple system	± 2 percent (400°F full scale)

4.5.1.4 Frame temperature. Frame temperature shall be measured by means of a thermocouple inserted in a hole drilled in or adjacent to the pole screw nearest the cooling air outlet of the starter-generator. The poleshoe screw shall not be loosened.

4.5.1.5 Stabilized temperature. The starter-generators shall be considered to be temperature stabilized when operation under constant conditions fails to cause a change in frame temperature in excess of 2°F in any five minute period of any 20 minute test.

4.5.1.6 Polarity. To determine conformance to 3.2.7, observation shall be made of the multi-range ammeter throughout the test procedure.

4.5.2 Output. When output tests are performed, the starter-generator shall be stabilized at the highest attainable frame temperature, not exceeding 165°F above ambient temperature at 30 volts. The starter-generator shall be stabilized at this temperature, unless some factor other than temperature, such as poor commutation, limits the performance at the particular point. To determine conformance to 3.3.1, at least six points shall be established on the performance curve, including the following, as applicable:

(a) Cut-in speed (see 6.3.1). This speed shall be determined with no resistance in series with the field.
(b) Minimum speed at rated output (see 6.3.2). This speed shall be determined with no resistance in series with the field.
(c) Maximum operating speed (see 6.3.5). This shall be the maximum operating speed as shown on the drawing. It shall be established by adjusting the field resistance.
(d) Performance check point (see 6.3.6).

4.5.2.1 Output, checkpoint (heat stabilized). To determine conformance to 3.3.1.1, the starter-generator shall be subjected to the same test procedure specified in 4.5.2 except that the only check required is the output at the performance check-point indicated on the performance curve on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.5.3 Endurance. To determine conformance to 3.3.2, the starter-generator shall be operated as detailed below:

Test Step	Starter-Generator RPM (± 25 rpm)	Starter-Generator volts (± 0.2 volts)	Starter-Generator output AMPS minimum	Time Hours
1	3600	28	300	330
2	4500	28	300	335
3	6000	28	300	335

During the last 100 hours of operation at each test step, the starter-generator shall be operated with armature shaft at an angle of 45 ± 1 degrees above the horizontal for the first 50 hours and 45 ± 1 degrees below the horizontal for the second 50 hours. Output current and voltage, and starter-generator speed and temperature shall be measured during the test. Subsequent to the test the starter-generator shall be subjected to the test specified in 4.6.2.1.

4.5.4 Starter output. To determine conformance to 3.3.1.3, with 1.25 ohms connected external to the shunt field and 16 volts applied, the torque shall be measured at 1300 RPM with a load of 500 AMPS, at 1600 RPM with a load of 300 AMPS and with the rotor locked.

4.5.5 Overspeed. The starter-generator shall be stabilized at maximum operating speed. The field circuit shall then be opened and the starter-generator speed increased to 10 percent above maximum operating speed (6500 RPM) for one minute. The starter-generator shall then be inspected for damage to determine conformance to 3.3.3. Subsequent to the test the starter-generator shall be subjected to the test specified in 4.5.2.1.

4.5.6 High temperature. The starter-generator shall be stored for 24 hours in an ambient temperature of 160° ± 5°F. The starter-generator shall then be stabilized at average speed at rated output at ambient temperature of 160° ± 5°F. The starter-generator frame temperature shall be recorded. After stabilization, the starter-generator shall be operated under these conditions for four hours. The starter-generator shall then be inspected to determine conformance to 3.3.4. Subsequent to the test the starter-generator shall be subjected to the test specified in 4.5.2.1.

4.5.7 Low temperature. The starter-generator shall be stored for 24 hours in an ambient temperature of minus 65° ± 5°F. The starter-generator shall then be stabilized at average speed at rated output at an ambient temperature of minus 65° ± 5°F. After stabilization, the starter-generator shall be operated under these conditions for four hours. The starter-generator shall then be examined to determine conformance to 3.3.5. Subsequent to the test the starter-generator shall be subjected to the test specified in 4.5.2.1.

4.5.8 Dielectric strength. To determine conformance to 3.3.6, the starter-generator shall be subjected to a ground test of 500 volts root-mean-square (rms)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the currentversion before use.

at a frequency of 60 cycles-per-second (cps), applied for one minute. The potential shall be applied to the armature and field terminals with the ground brush raised off the commutator, and with the field ground terminal disconnected.

4.5.9 Shock resistance. To determine conformance to 3.3.7, the starter-generator shall be subjected to tests in accordance with MIL-STD-810, Method 516, 40G, 18 milliseconds per procedure I for ground equipment, figure 516-1 and subsequently tested in accordance with 4.5.2.1.

4.5.10 Vibration. To determine conformance to 3.3.8, the starter-generator shall be subjected to tests in accordance with MIL-STD-810, Method 514, procedure VIII, curve W, figure 5, parts 1, 2 and 3. During the test the starter-generator shall be operated as a motor at a speed of 4,500 ± 500 rpm. Subsequently the starter-generator shall be subjected to the test specified in 4.5.2.1.

4.5.11 Electromagnetic interference. To determine conformance to 3.3.9, the starter-generator shall be tested in conformance with the applicable provisions of MIL-STD-462.

4.5.12 Corrosion resistance. To determine conformance to 3.3.10, the starter-generator shall be subjected to the salt spray test specified in method 509 of MIL-STD-810 except the time shall be 96 hours. All openings shall be sealed prior to testing. After testing the starter-generator shall be rinsed with tap water and dried for one hour before being tested to 4.5.2.1.

4.5.13 Fungus resistance. To determine conformance to 3.3.11, the starter-generator shall be subjected to the fungus resistance test specified in method 508 of MIL-STD-810 except the period of exposure shall be 90 days. All openings shall be sealed prior to testing. The starter-generator shall subsequently meet the requirements of 4.5.2.1.

4.6 Inspection of preparation for delivery.

4.6.1 Materials and processes. All materials and processes involved in the preparation for delivery shall be inspected to determine conformance to requirements of Section 5. Any evidence of deviation from specified requirements shall be cause for refusal to conduct further inspection until objective evidence has been provided by the contractor that corrective action has been taken.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation packaging, packing, and marking for the desired level of protection shall be in accordance with the applicable packaging standard or packaging data sheet specified by the procuring activity (see 6.2).

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the currentversion before use.

6.1 Intended use. The starter-generator covered by this specification is used on military motor vehicles and on other equipment to generate direct current energy for lighting, battery charging and other purposes. It is also used as a starter to activate the gasoline engine connected to it.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Applicable drawing (see 3.2).
(c) If permanent markings are required (see 3.5.3).
(d) Selection of applicable level and packaging standard or packaging data sheet (see 5.1).

6.3 Definitions.

6.3.1 Cut-in-speed. Cut-in speed is the lowest speed that the starter-generator, with frame temperature stabilized, will generate 28 volts with no external load.

6.3.2 Minimum speed at rated output. Minimum speed at rated output is the lowest speed at which rated output can be obtained at 28 volts.

6.3.3 Maximum speed at rated output. Maximum speed at rated output is the highest speed at which rated output is generated at 28 volts.

6.3.4 Average speed at rated output. Average speed at rated output is the speed half way between the "minimum speed at rated output" and "the maximum speed at rated output" at 28 volts.

6.3.5 Maximum operating speed. Maximum operating speed shall be the maximum operating speed as indicated on the drawing.

6.3.6 Performance check point. The performance check point is that point on the speed output curve used as a reference point to check starter-generator output (see figure 1).

Custodian:
Army - AT

Preparing activity:
Army - AT
Project No. 2920-0257

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the currentversion before use.

PERFORMANCE CURVE

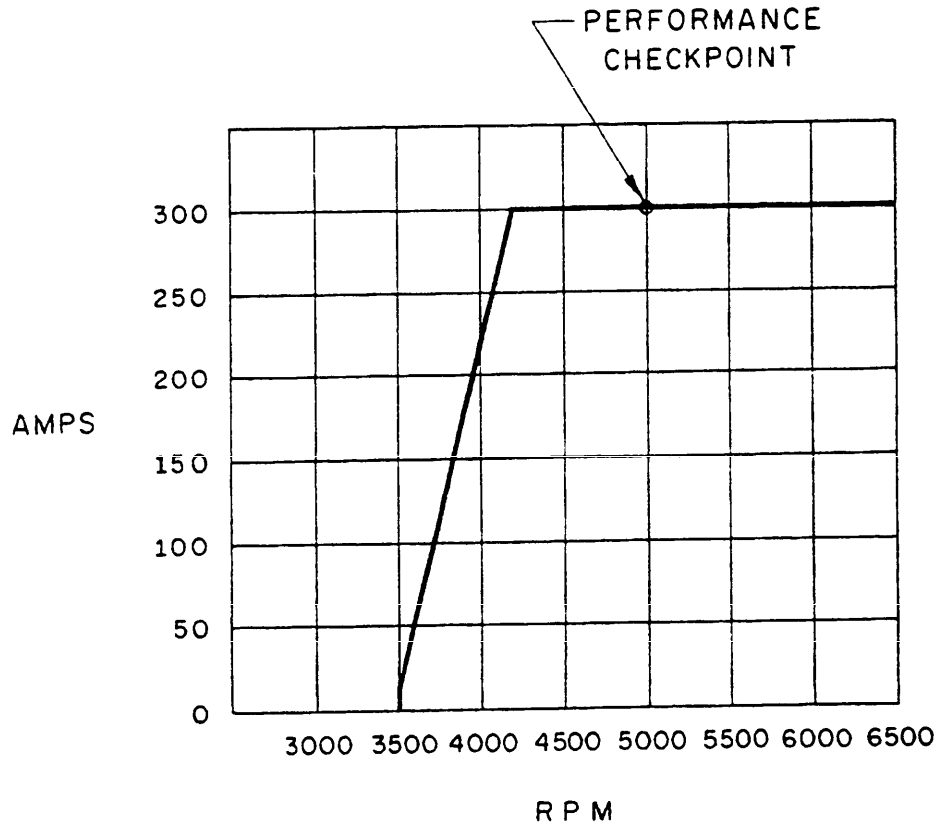


FIGURE 1.

28. VOLTS WITH .75 OHMS IN SERIES WITH SHUNT FIELD TERMINAL "A"

FRAME STABILIZED WITH 140°F MAX. AIR INLET TEMPERATURE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-S-62119(AT)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

Commanding General
U.S. Army Tank-Automotive Comma...
Warren, Michigan 48090
AMSTA-P

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

Commanding General
U.S. Army Tank-Automotive Command
Warren, Michigan 48090
AMSTA-P

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.