MIL-C-60623(MU)
AMENDMENT 3
14 August 1968
SUPERSEDING
AMENDMENT 2
28 September 1967

MILITARY SPECIFICATION

CASE, CARRYING: 10527433

This amendment forms a part of Specification MIL-C-60623(MU) dated 30 November 1966.

Paragraph 2.1: Delete: "MMM-A-132 Adhesives, Heat Resistant, Airframe, Structural, Metal to Metal".

* Paragraph 2.1: Delete: "MS15795 and Drawing B8627549".

Paragraph 3.5.1.2: Delete in entirety and substitute the following:

"3.5.1.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the case shells with an air curable adhesive sealant, conforming to General Electric RTV 118 and Primer SCP 154, General Electric Co., Waterford, N.Y. or equal. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a watertight joint. Minimum cure time for sealant is twenty-four (24) hours. The extrusion edge assemblies shall be tool rolled and crimped around the periphery to assure positive attachment to case shells."

* Delete: "Figures 1, 1A, 6, 7, 8 and 9" and substitute attached Figures 1, 1A, 6, 7, 8 and 9".

Delete: "Figures 3 and 4" and substitute attached"Figures 3 and 4".

* The outside margins have been marked to indicate where additions or deletions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A108

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

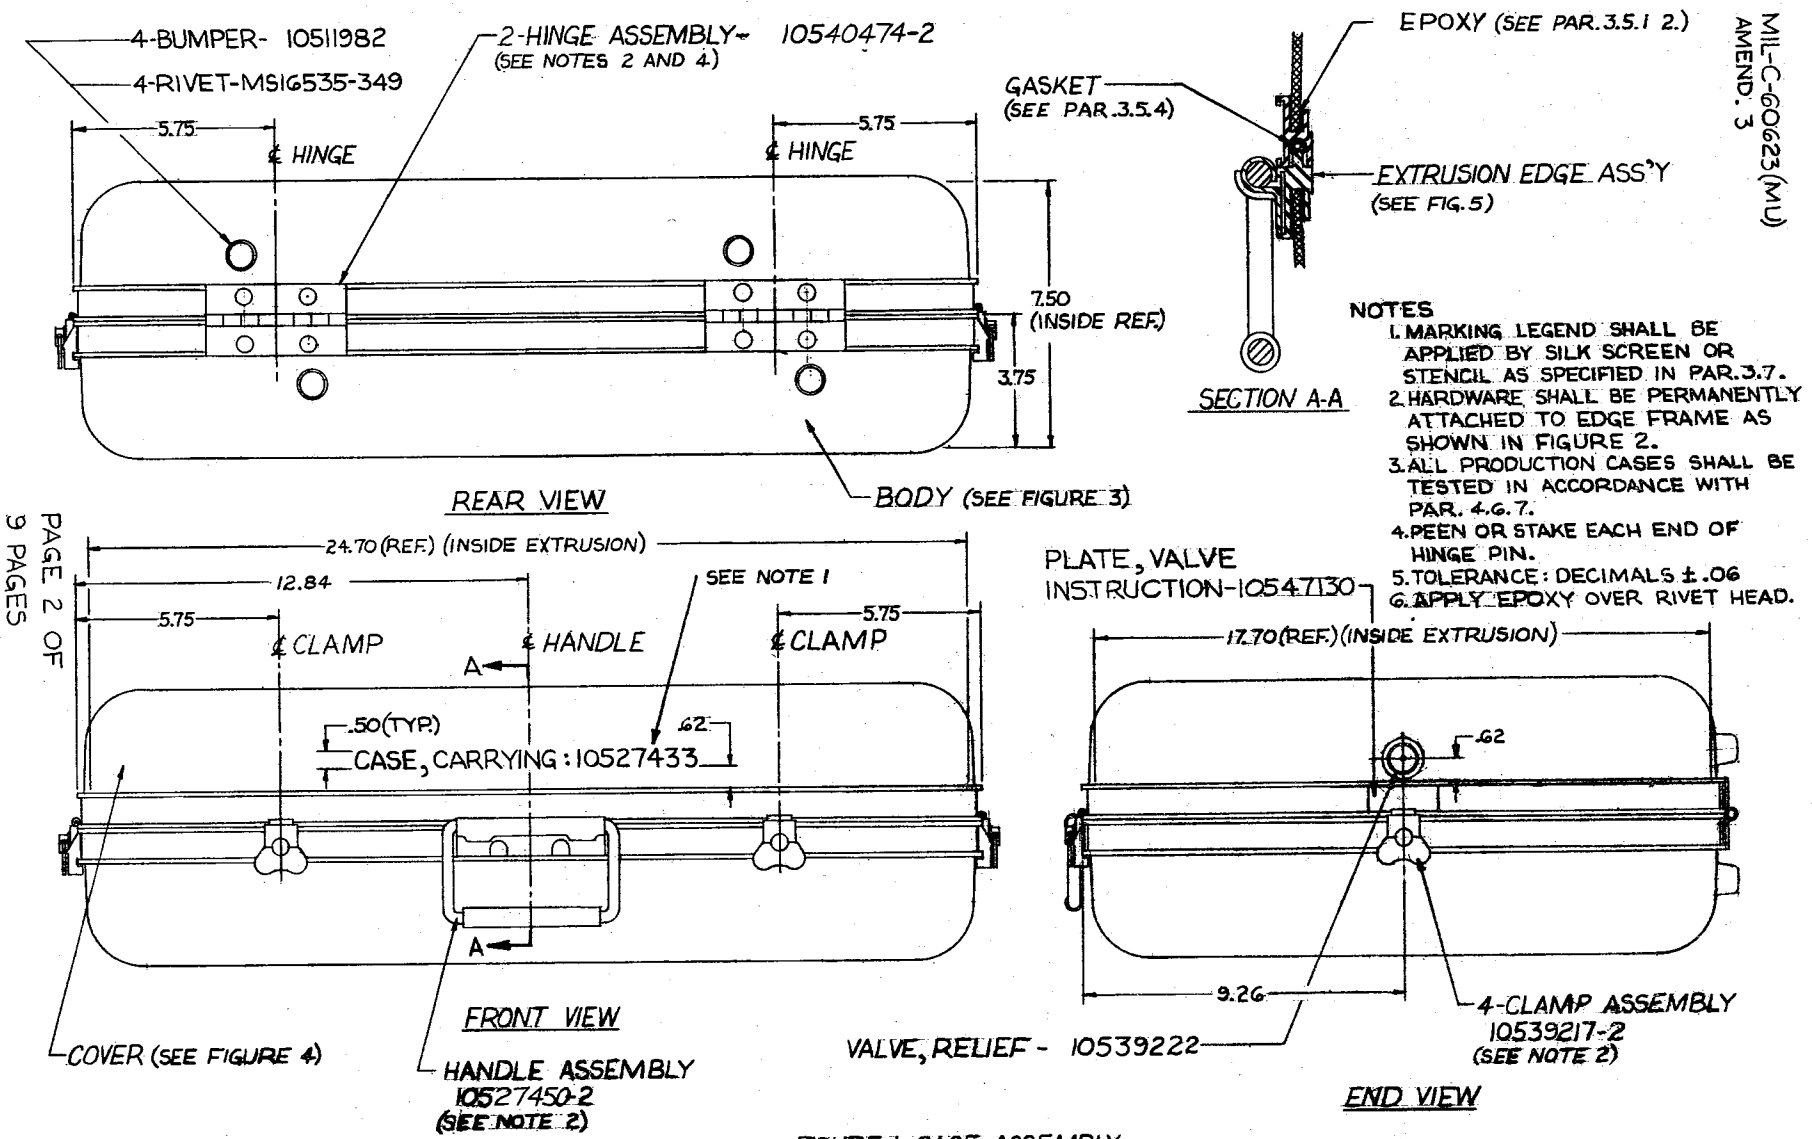


FIGURE 1-CASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

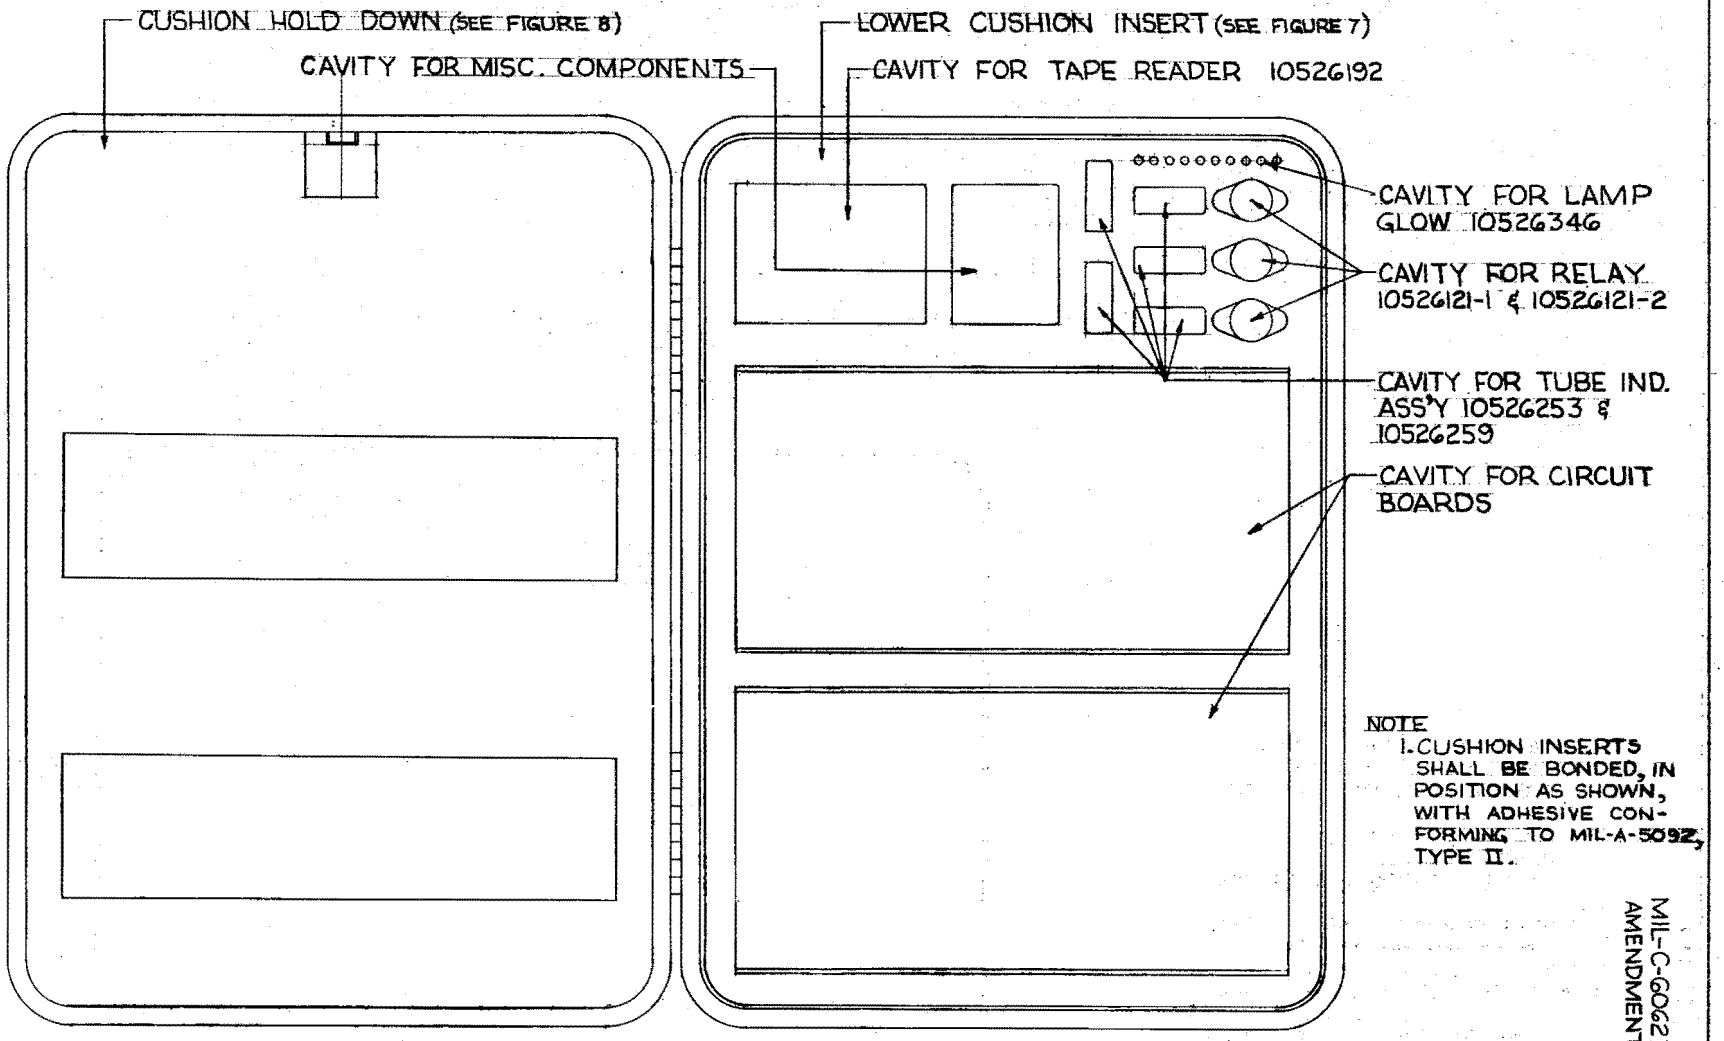


FIGURE 1A-INTERIOR CUSHION ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3. STARTING THICKNESS-.187
COLOR-OLIVE DRAB, NO. X24087 OF FED-STD-595
FINISH- EXTERIOR-HAIRCELL GRAIN
INTERIOR (OPTIONAL)-HAIRCELL GRAIN OR SMOOTH
FORMED WALL THICKNESS- $.120^{+.020}_{-.030}$

2. TOLERANCES- DECIMALS ± .03
FRACTIONS ± 1/32
ANGLES +1°, -0°

SUGGESTED MATERIAL SOURCE.
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-4313-CPA-1492


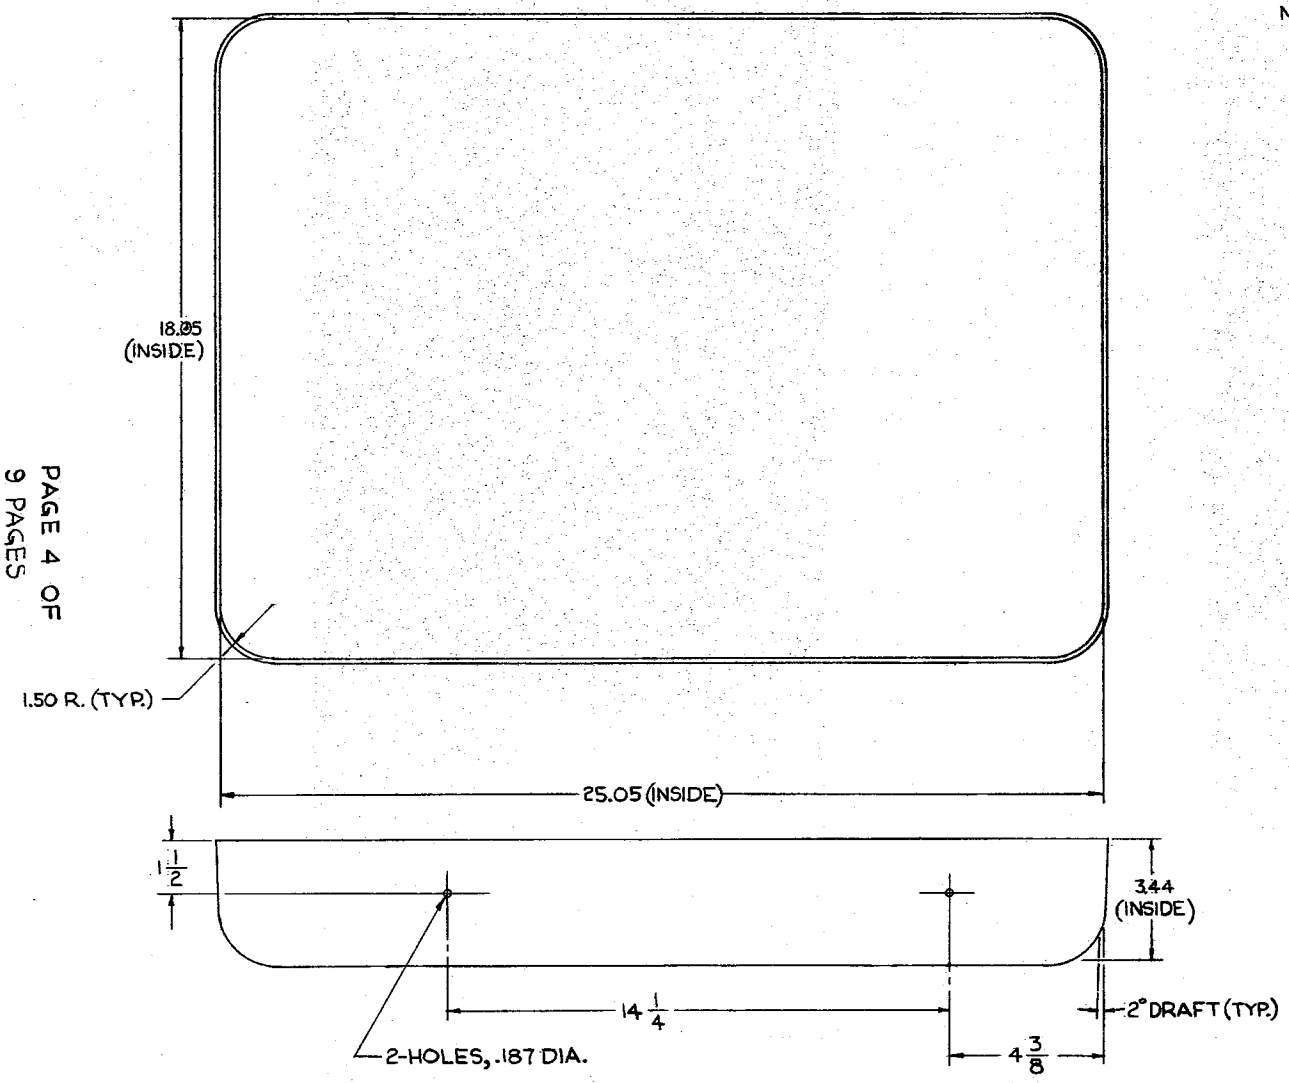


FIGURE 3 - SHELL, BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

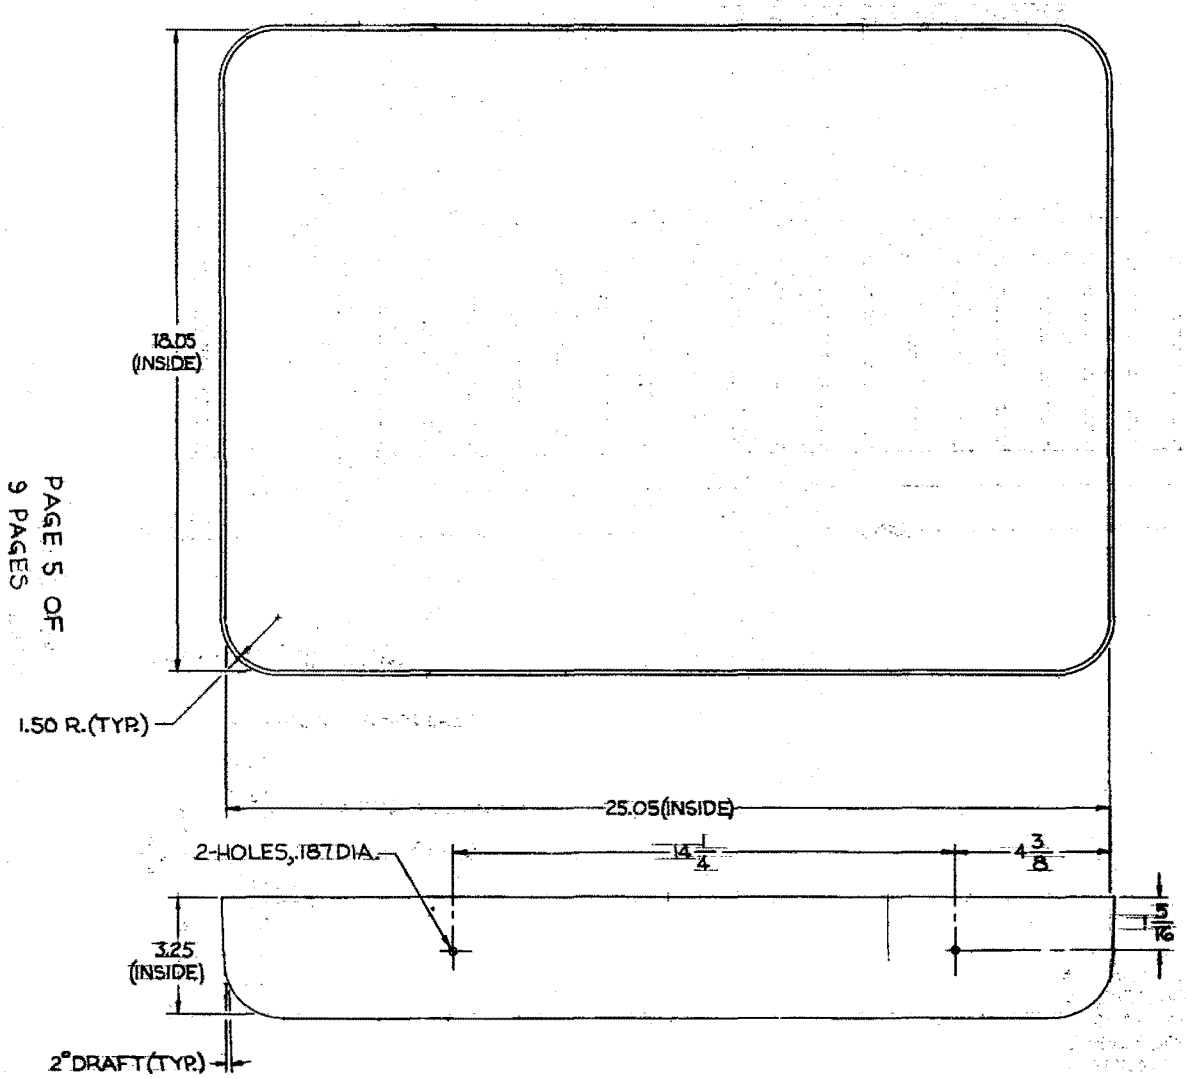

NOTES:

1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3. STARTING THICKNESS - .187
   COLOR - OLIVE DRAB, NO. X24087 OF FED-STD-595
   FINISH - EXTERIOR - HAIRCELL GRAIN
   INTERIOR (OPTIONAL) - HAIRCELL GRAIN OR SMOOTH
   FORMED WALL THICKNESS .120 $^{+.020}_{-.030}$


2. TOLERANCES - DECIMALS ±.03
   FRACTIONS ±1/32
   ANGLES +1°, -0°

SUGGESTED MATERIAL SOURCE
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-4313-CPA-1492

FIGURE 4 - SHELL, COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

NOTES
1. BREAK SHARP EDGES.
2. MATERIAL SHALL CONFORM TO MIL-M-22544, TYPE III. COLOR-GRAY, STARTING THICKNESS .062
3. TOLERANCES ±1/32
4. FINISH-SMOOTH ALL OVER.

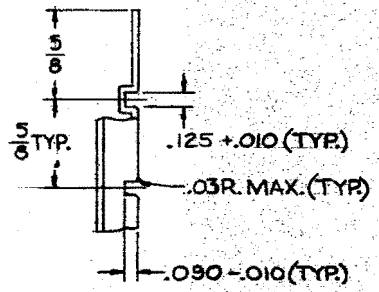

PARTIAL TOP VIEW

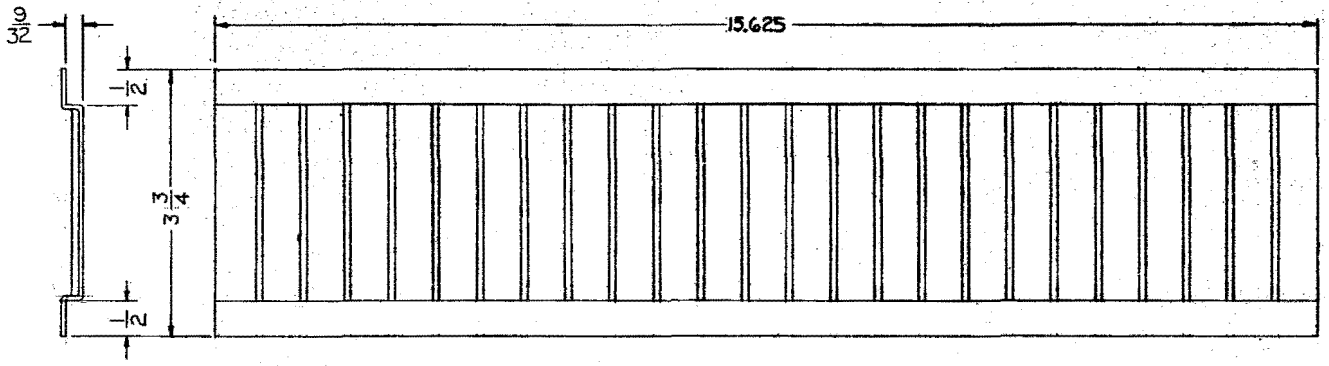


FIGURE 6. - CARD GUIDE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.


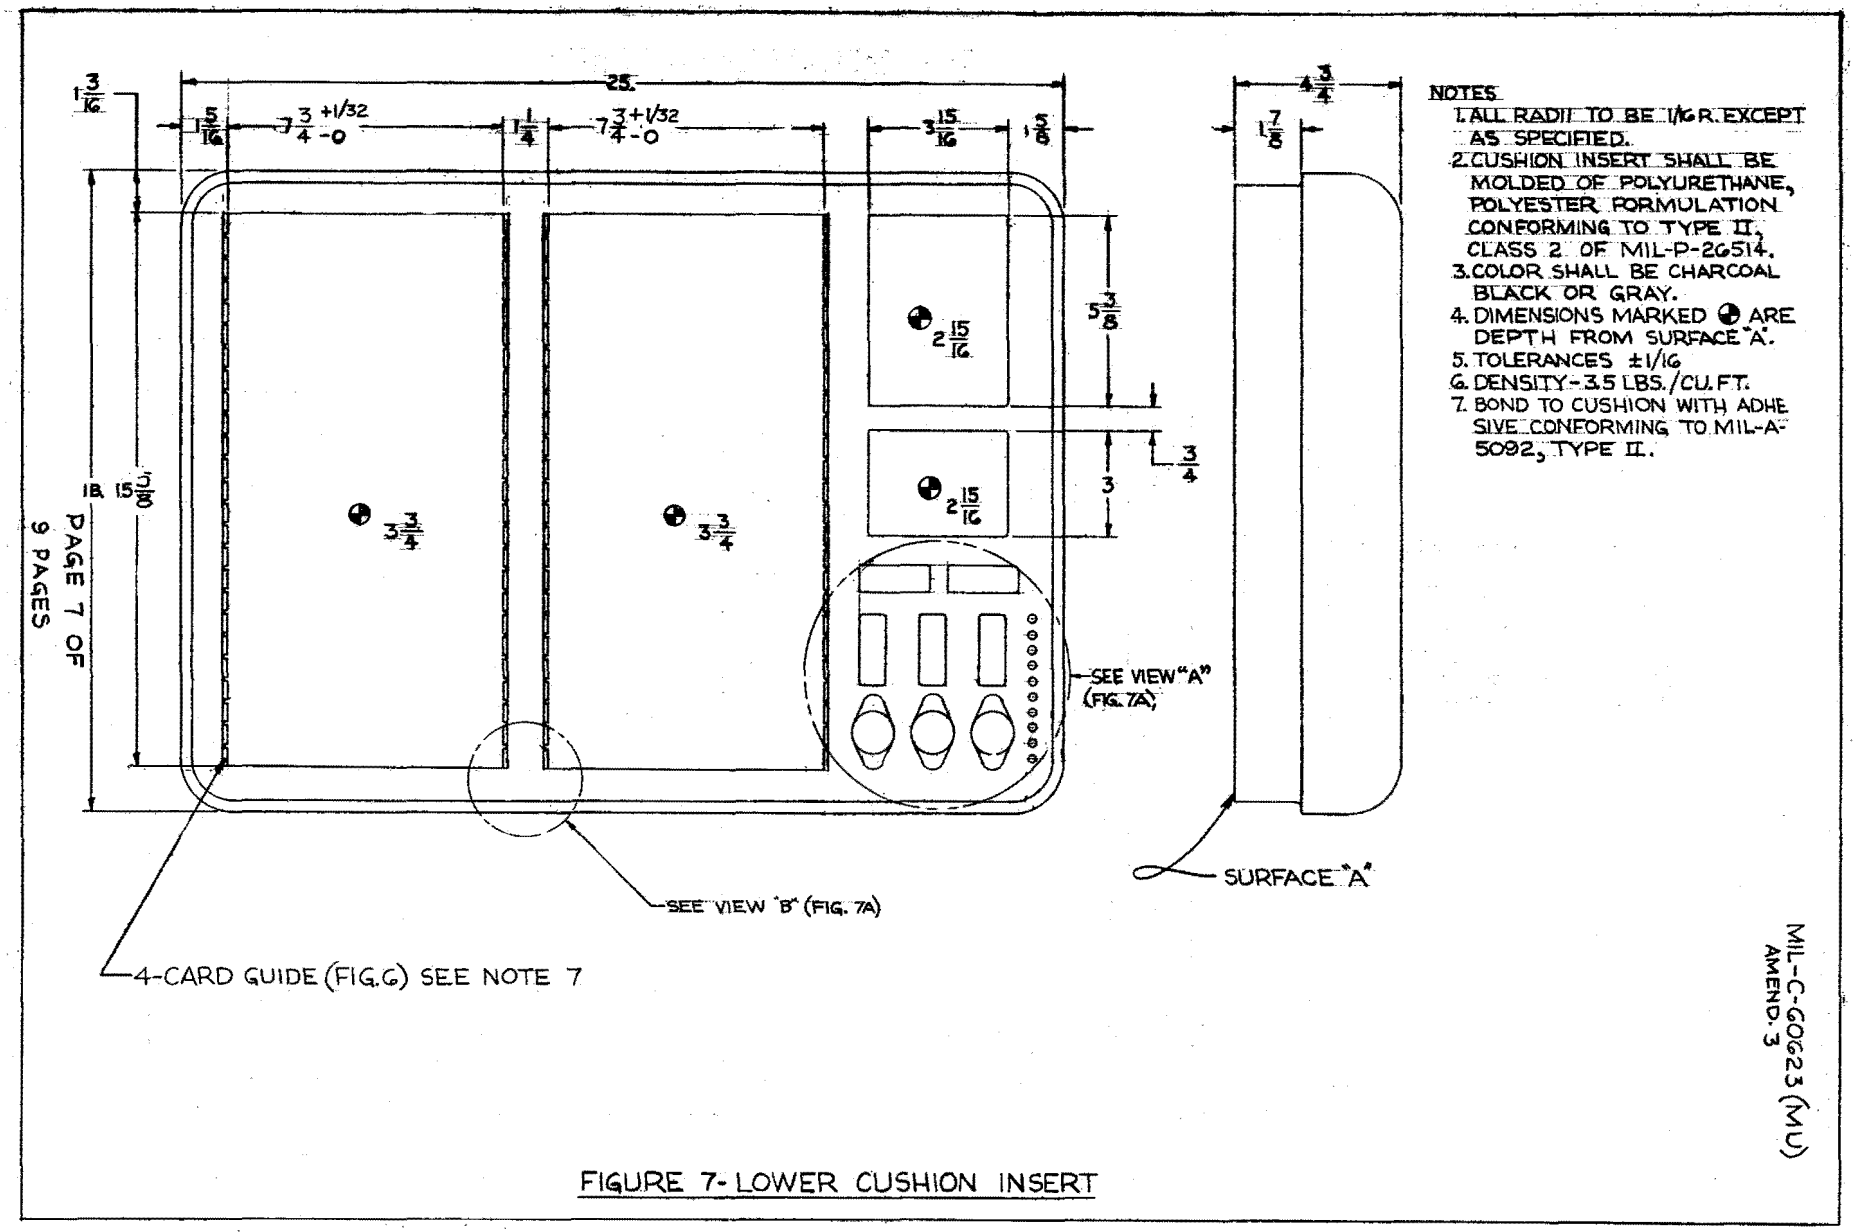


FIGURE 7- LOWER CUSHION INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

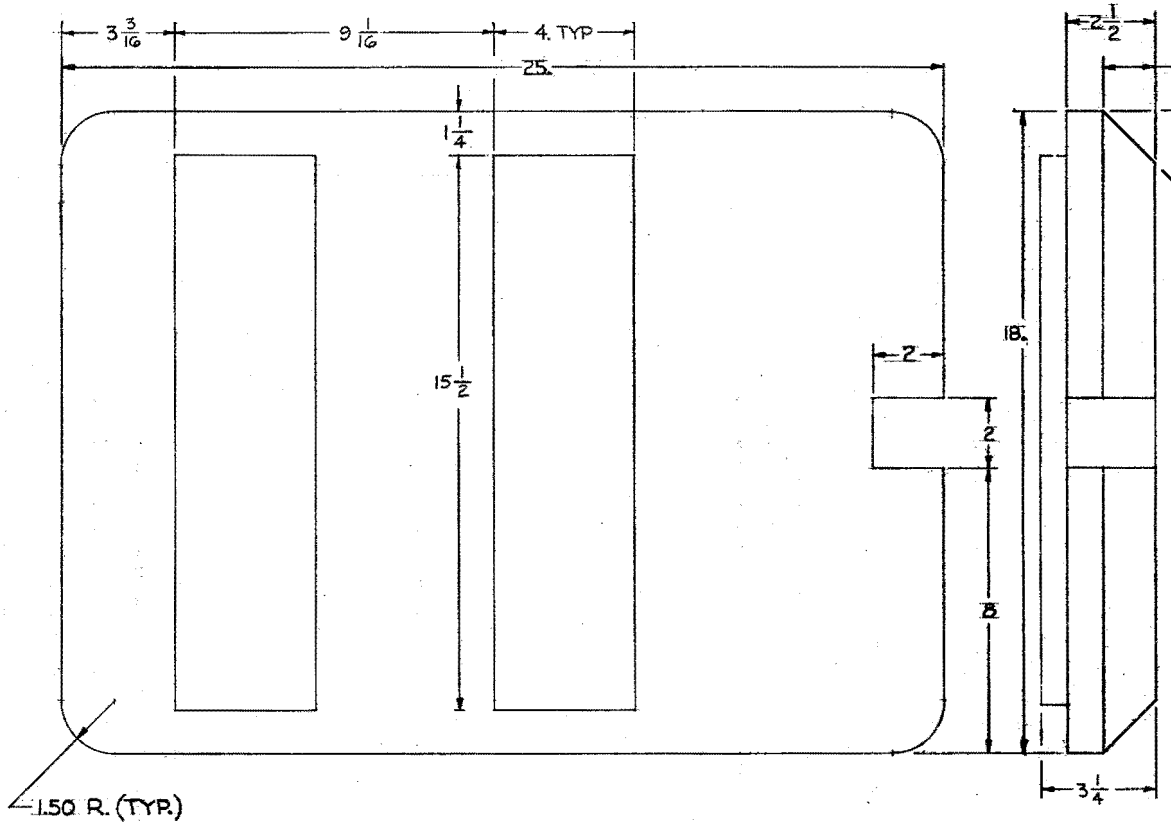

NOTES:
1. CUSHION HOLD DOWN SHALL BE FABRICATED OF POLYURETHANE, POLYESTER FORMULATION CONFORMING TO TYPE I, CLASS 2 OF MIL-P-26514.
2. COLOR-CHARCOAL BLACK OR GRAY.
3. TOLERANCES-FRACTIONS ±1/16
ANGLES ±3°
4. DENSITY-1.8 LBS./CU. FT.

FIGURE 8 - CUSHION HOLD DOWN

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

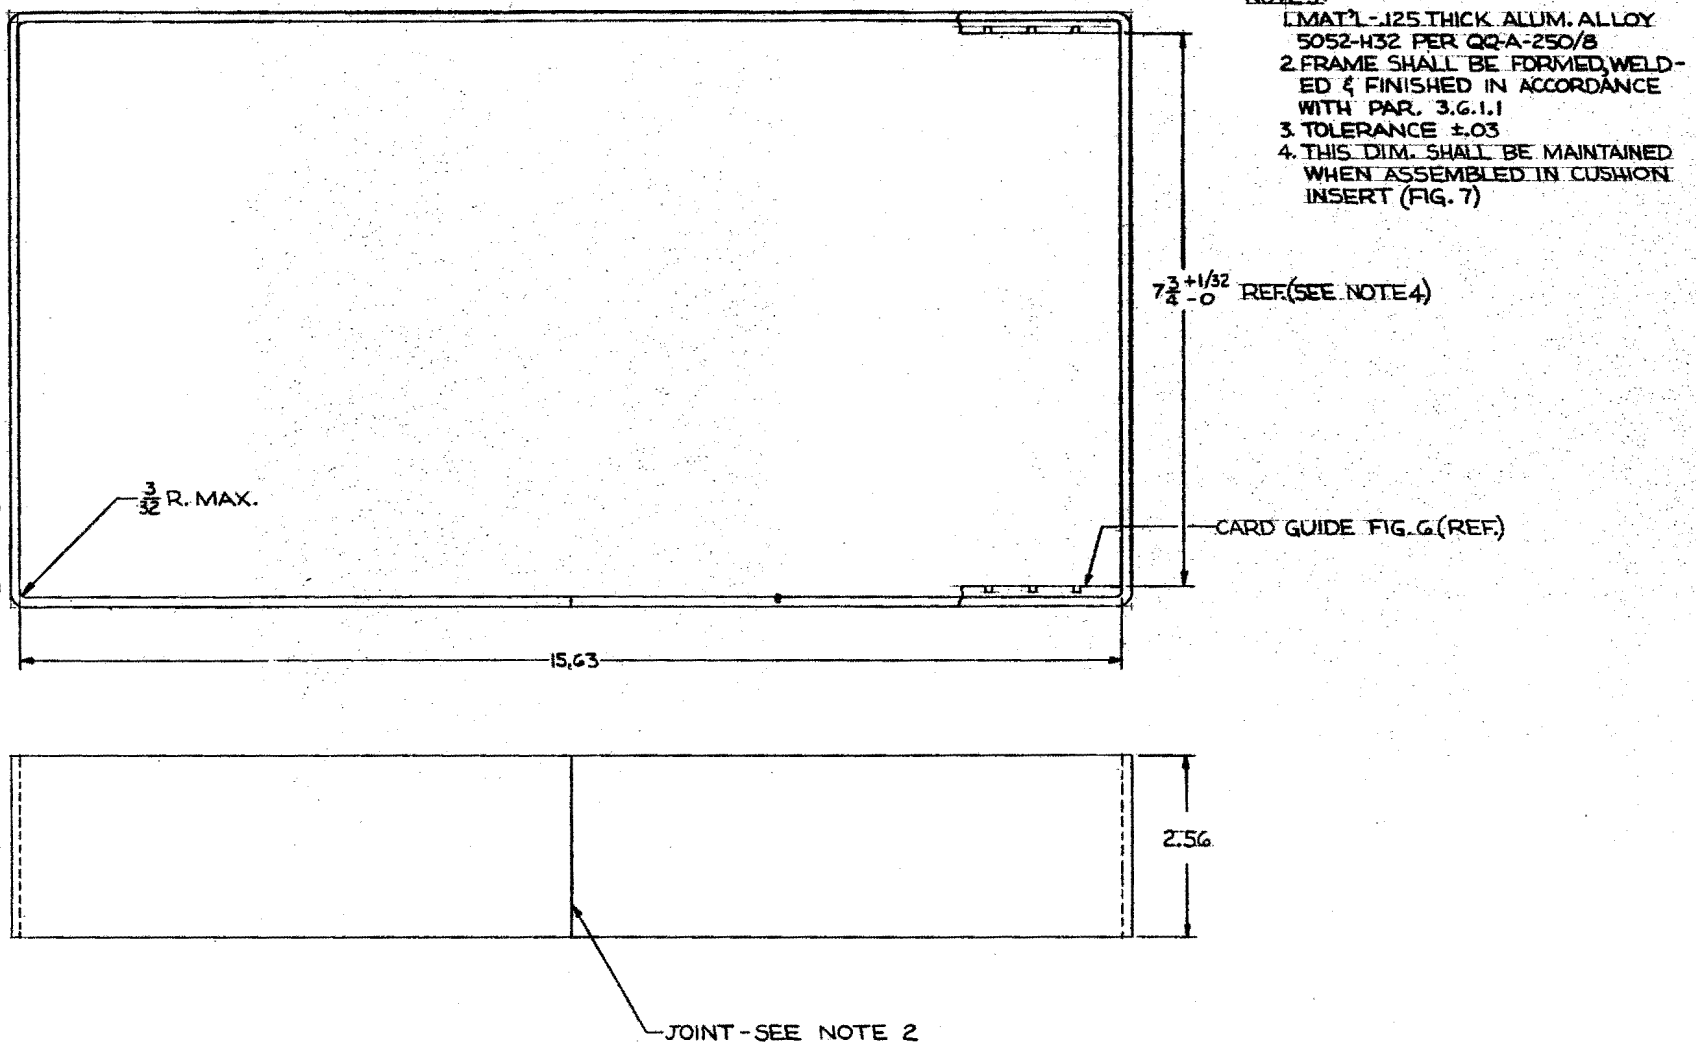


FIGURE 9 - FRAME ASS'Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.