
METRIC
MIL C 55302/164C(CR)
17 March 1995
SUPERSEDING
DOD-C-55302/164B(CR)
18 July 1985

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG AND/OR RECEPTACLE, 160 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS, 2 54 MM X 1 27 MM OFFSET GRID, METRIC

This specification is approved for use within the US Army Communications - Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302 .

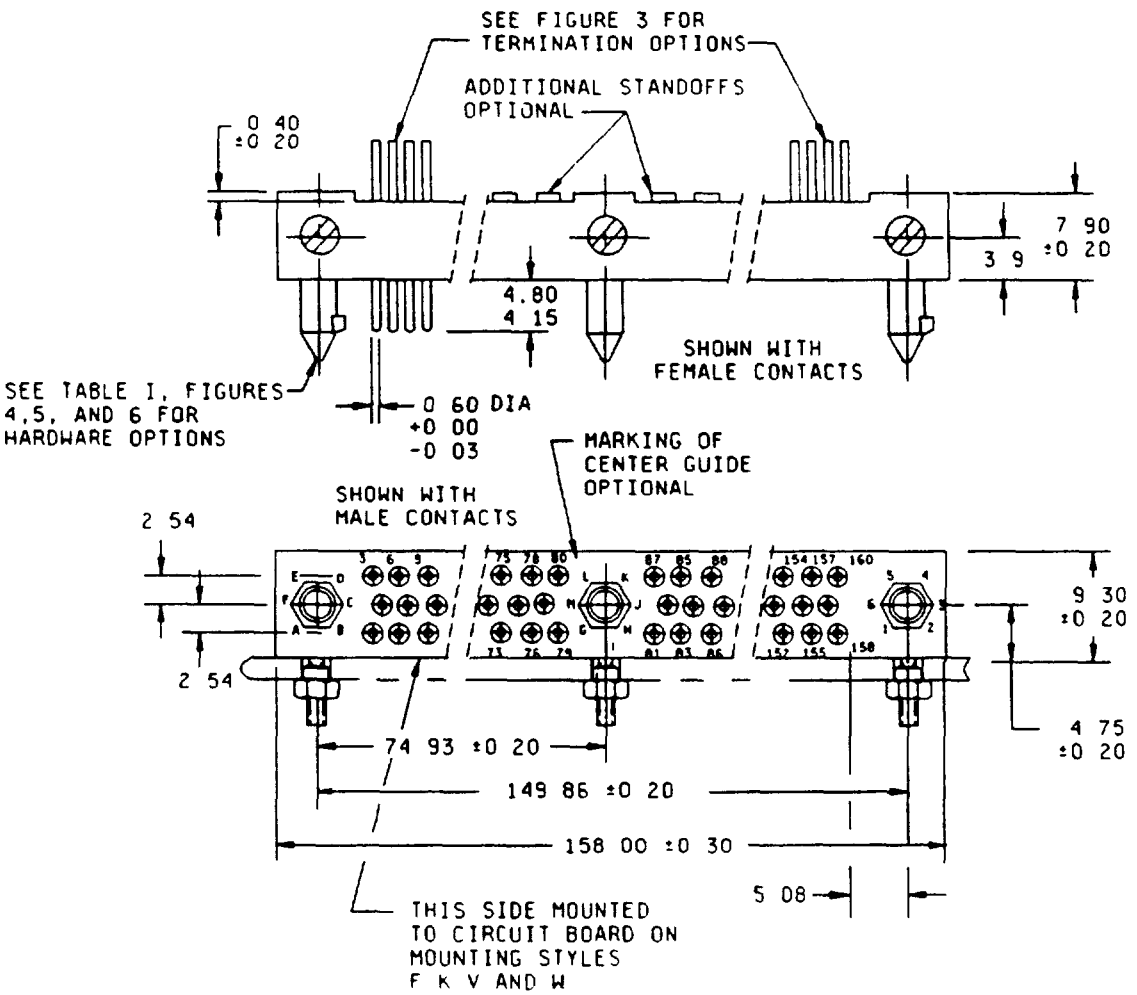


NOTE Dimensions are in millimeters

FIGURE 1 Connector plug

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

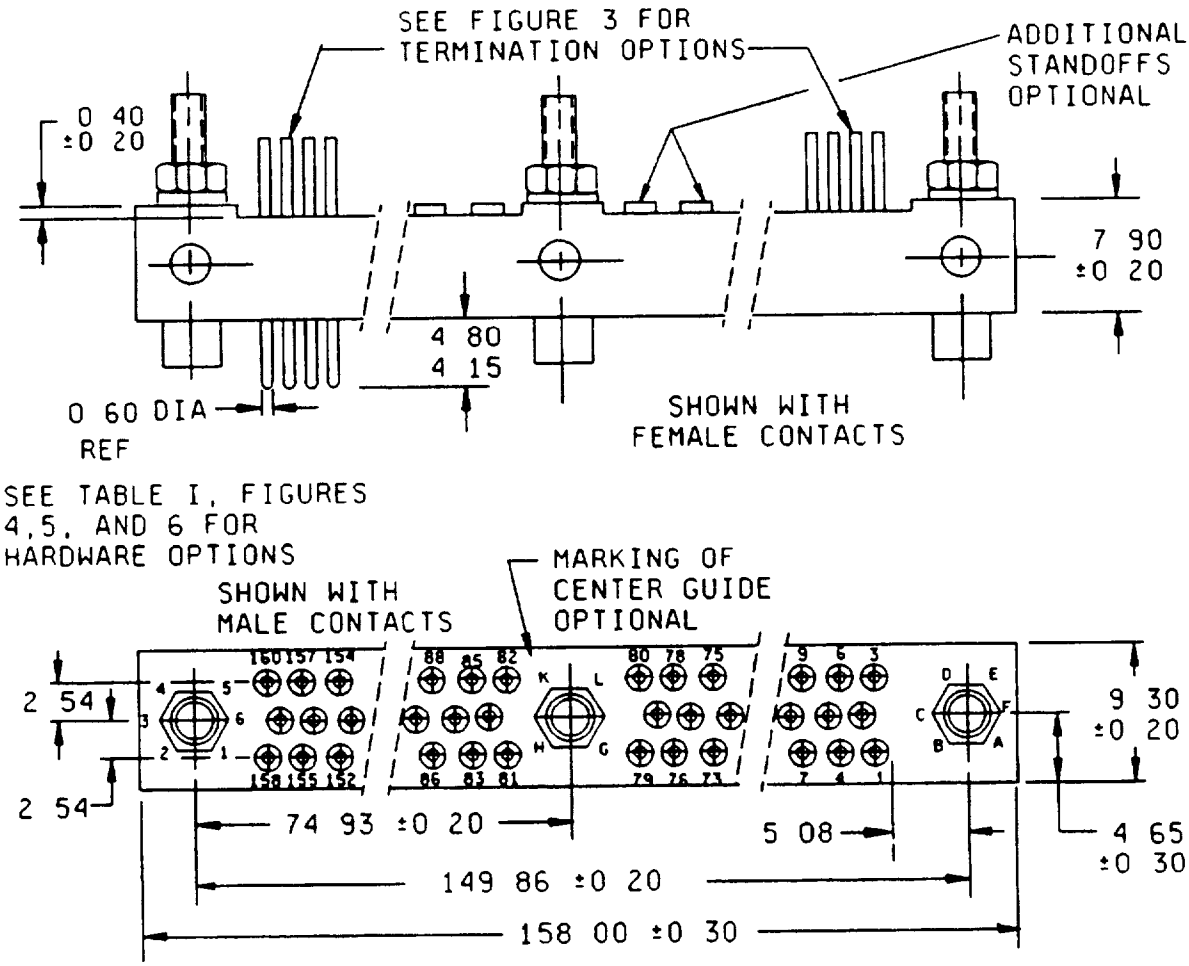

NOTE Dimensions are in millimeters

FIGURE 2 Connector receptacle

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES

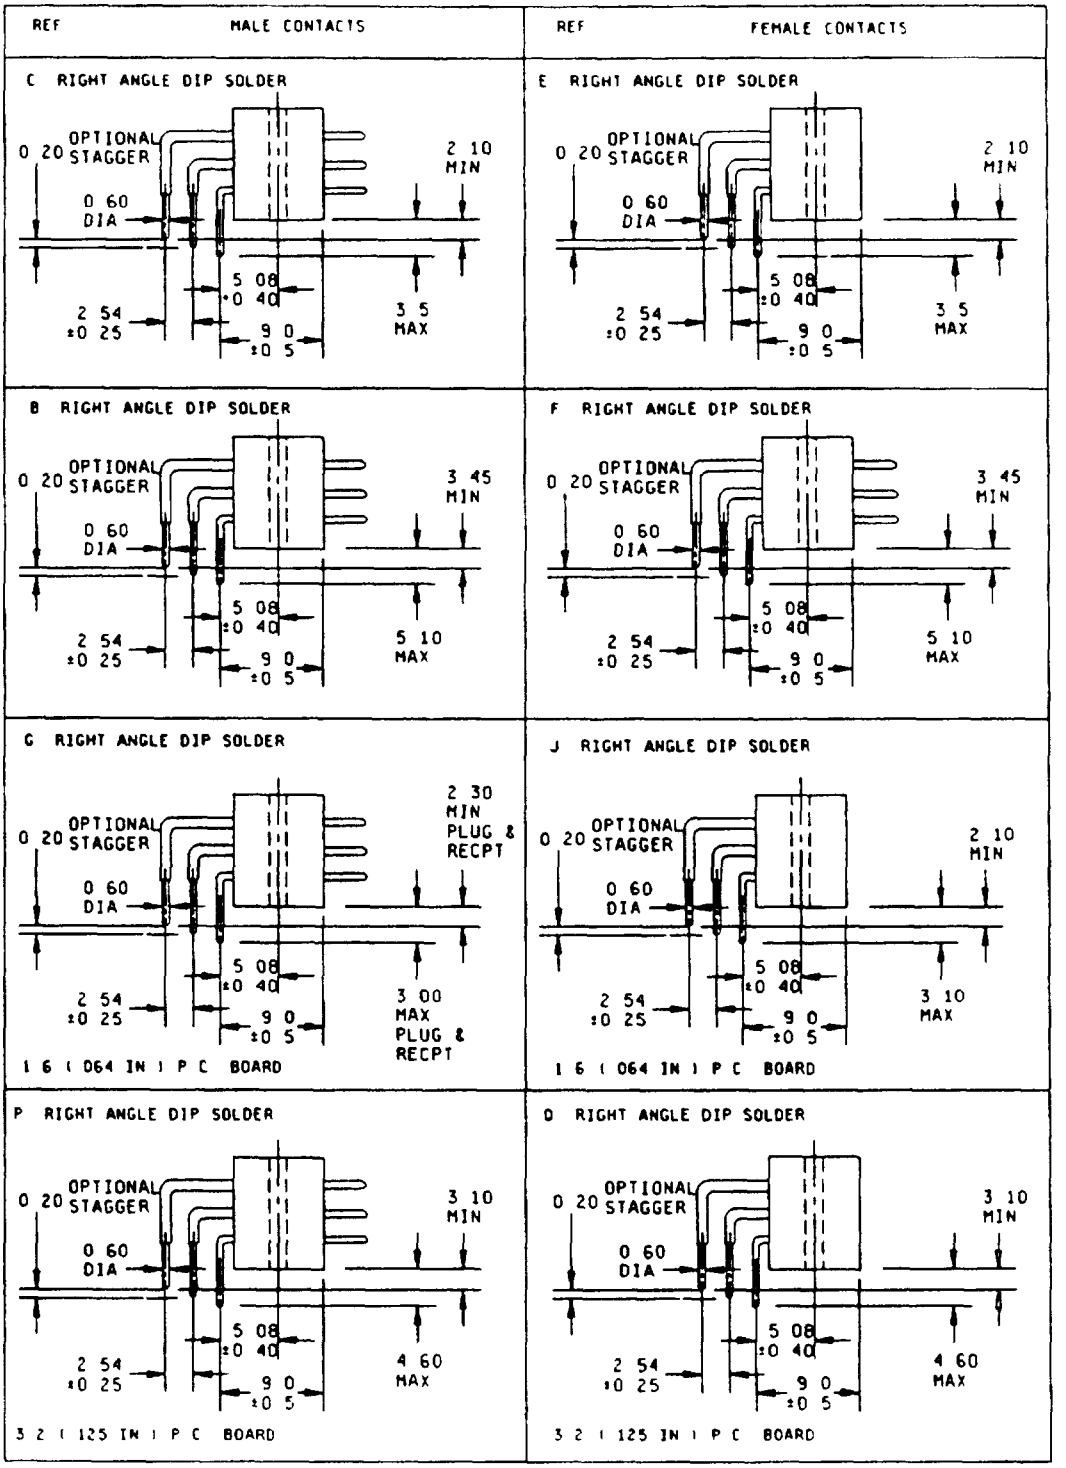


FIGURE 3 Connector termination styles

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES









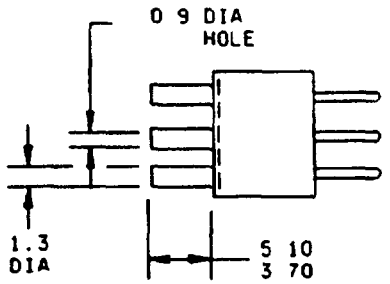
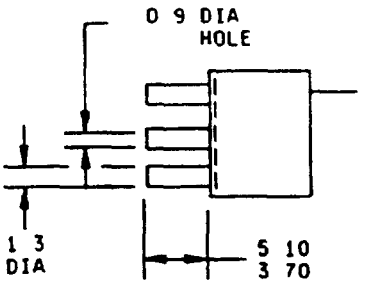
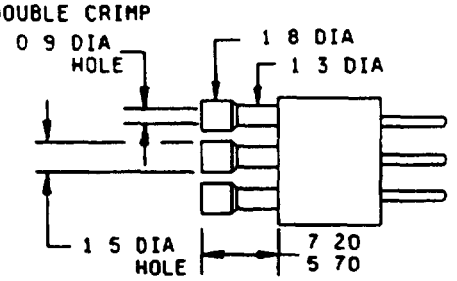
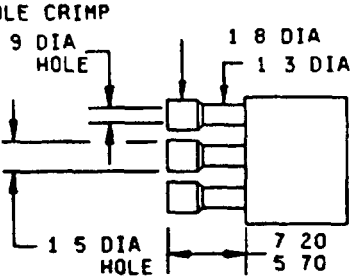
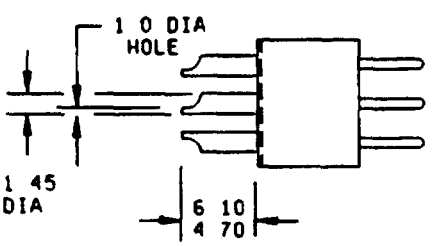
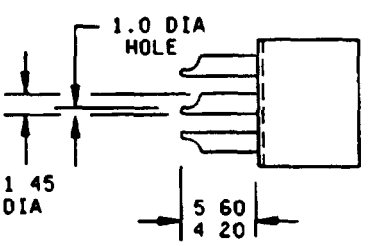

REF	MALE CONTACTS	REF	FEMALE CONTACTS
A	STRAIGHT DIP SOLDER 0 60 DIA  	D	STRAIGHT DIP SOLDER 0 60 DIA 
T	STRAIGHT DIP SOLDER 0 60 DIA  1 6 (064 IN) P C BOARD	U	STRAIGHT DIP SOLDER 0 60 DIA  1 6 (064 IN) P C BOARD
N	STRAIGHT DIP SOLDER 0 60 DIA  2 4 (094 IN) P C BOARD	Z	STRAIGHT DIP SOLDER 0 60 DIA  2 4 (094 IN) P C BOARD
V	STRAIGHT DIP SOLDER 0 60 DIA  3 2 (125 IN) P C BOARD	W	STRAIGHT DIP SOLDER 0 60 DIA  3 2 (125 IN) P C BOARD

FIGURE 3 Connector termination styles Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES


REF	MALE CONTACTS	REF	FEMALE CONTACTS
R	CRIMP  FOR 22,24 AND 26 AWG	K	CRIMP  FOR 22,24 AND 26 AWG
M	DOUBLE CRIMP  FOR 22,24 AND 26 AWG S SOLDER CUP	H	DOUBLE CRIMP  FOR 22,24 AND 26 AWG L SOLDER CUP
	 FOR UP TO 22 AWG		 FOR UP TO 22 AWG
		Y	WRAP POST 

NOTE. Dimensions are in millimeters

FIGURE 3 Connector termination styles Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

MOUNTING STYLES

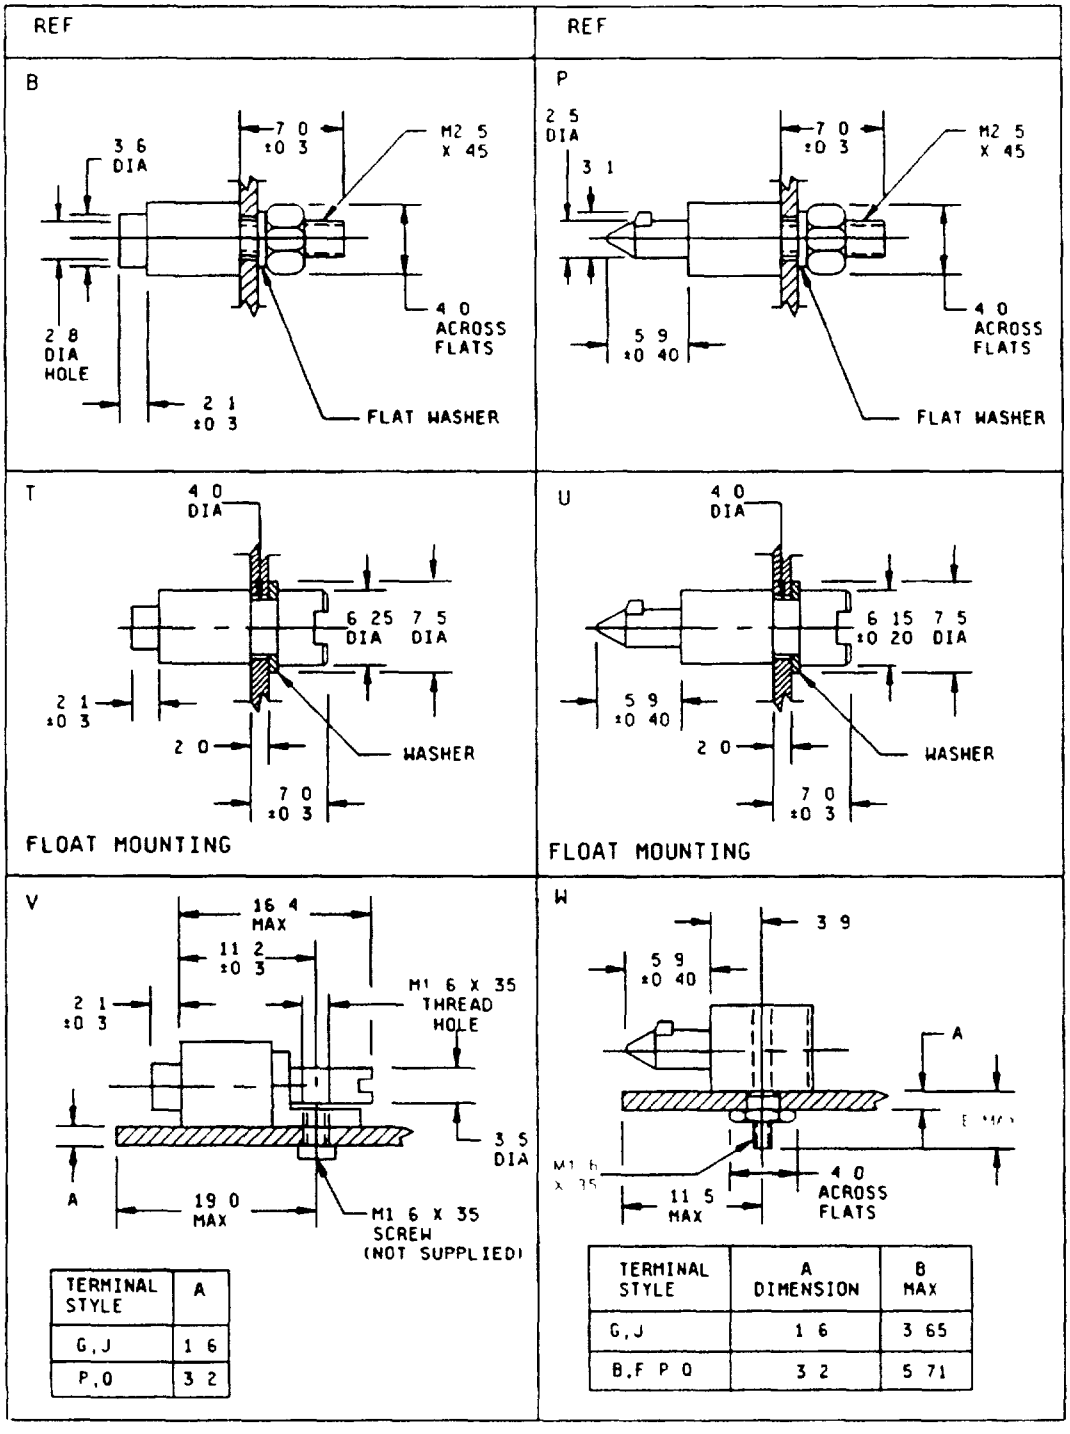

TERMINAL STYLE	A
G, J	1 6
P, Q	3 2

TERMINAL STYLE	A DIMENSION	B MAX
G, J	1 6	3 65
B, F P Q	3 2	5 71

NOTE Dimensions are in millimeters

FIGURE 4 Mounting styles

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

LOCKING HARDWARE


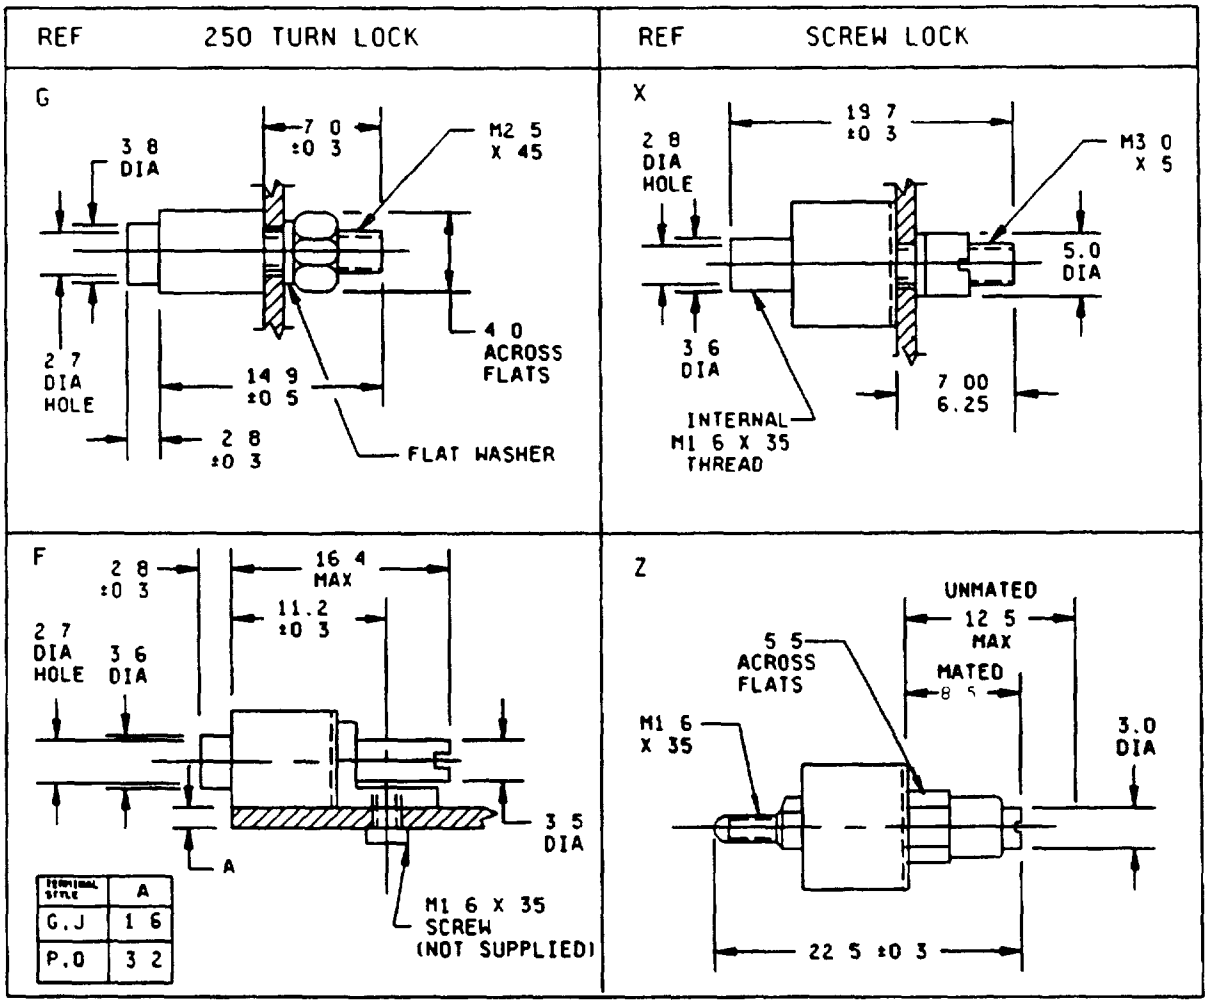


FIGURE 5 Locking hardware

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

LOCKING HARDWARE

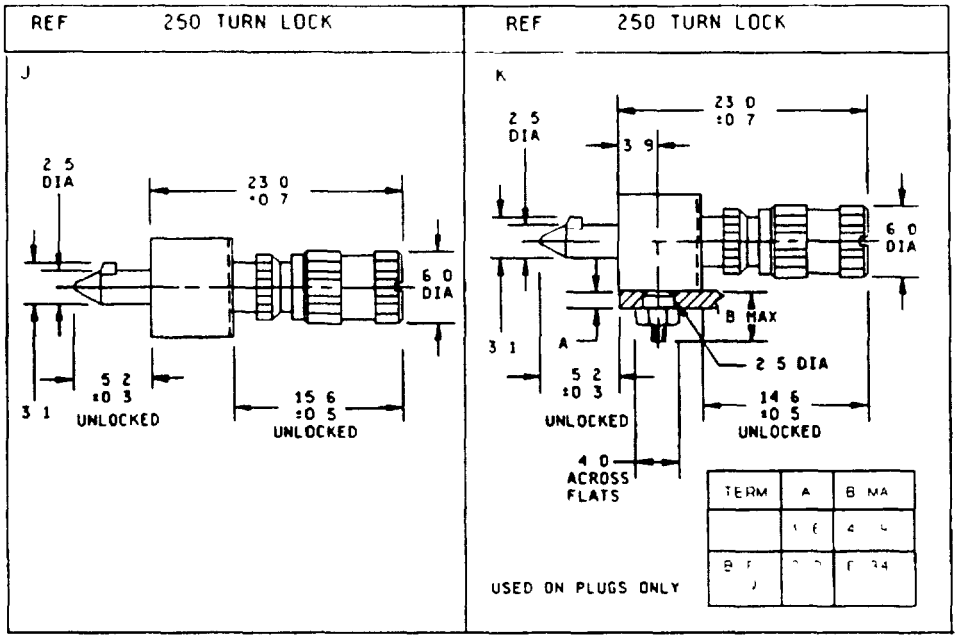

NOTES:

1. Dimensions are in millimeters
2. This is a metric design
3. Unless otherwise specified, tolerance is ±0 10 millimeter
4. These connectors mate with MIL-C-55302/160
5. See table I for mating.
6. Contact identification may be located adjacent to cavity on face or side and may be rotated 180°.
7. Crimp contacts are shipped not inserted into insulator.
8. Use crimp tool M22520/2-01 for R and K terminal styles with Daniels manufacturing positioner K547
9. Use crimp tool M22520/2-01 for M and H terminal styles with Daniels manufacturing positioner K547 and K640.

FIGURE 5. Locking hardware - Continued


TABLE I Mating references.

Type	Will only mate with (see note 4)	Locking method
B	P, U, W	None
F	J, K	Push 1\4 turn
G	J, K	Push 1\4 turn
J	F, G	Push 1\4 turn
P	B, T, V	None
T	P, U, W	None
U	B, T, V	None
V	P, U, W	None
W	B, T, V	None
X	Z	Screw
Z	X, Y	Screw

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.


MOUNTING DIMENSIONS

FOR MOUNTING STYLES B,P,G,X
MOTHER BOARD APPLICATION

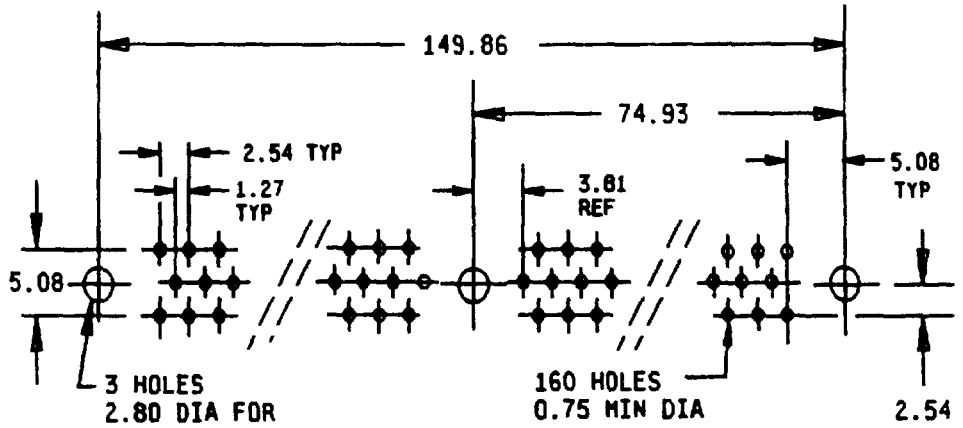

NOTE: TOLERANCES ARE NONCUMULATIVE

FOR MOUNTING STYLES W,K
DAUGHTER BOARD APPLICATION

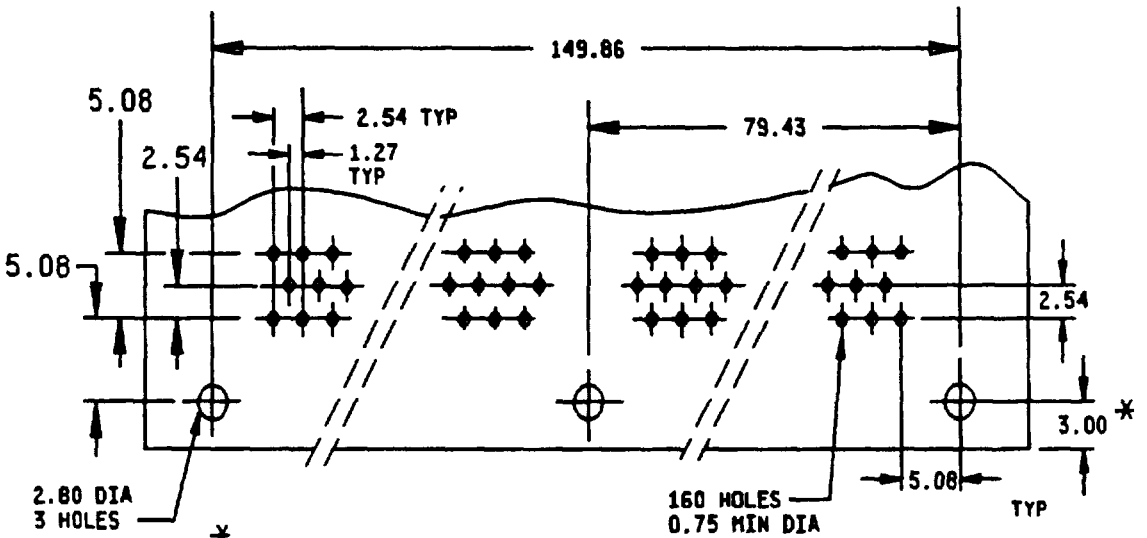


* NOTES:
1. FOR PLUGS ONLY. THE P.C. BOARD MAY BE EXTENDED TO 11.50 MAX FROM CENTER OF MOUNTING HOLES TO SERVE AS A PIN PROTECTOR.
2. TOLERANCE ARE NONCUMULATIVE.

FIGURE 6 Mounting dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

MOUNTING DIMENSIONS


FOR MOUNTING STYLES: F V
DAUGHTER BOARD APPLICATION

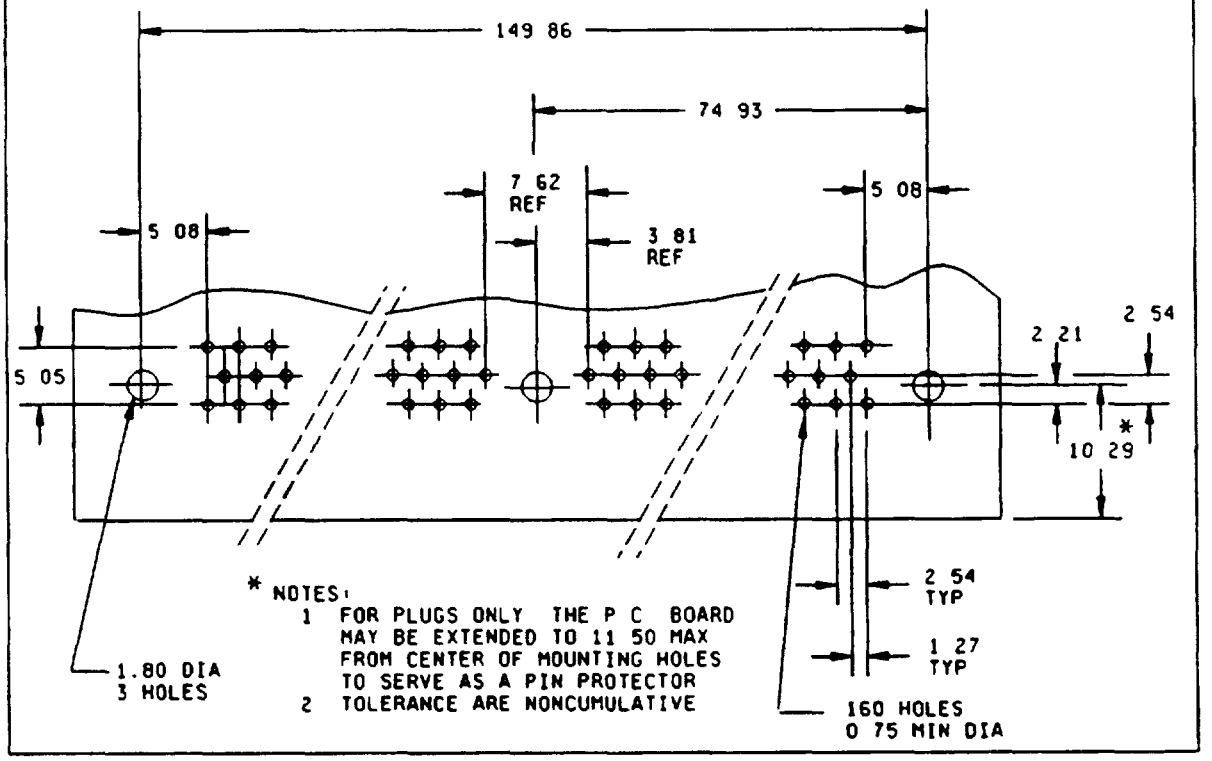

* NOTES:
1. FOR PLUGS ONLY THE P C BOARD MAY BE EXTENDED TO 11 50 MAX FROM CENTER OF MOUNTING HOLES TO SERVE AS A PIN PROTECTOR
2. TOLERANCE ARE NONCUMULATIVE

FIGURE 6 Mounting dimensions Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

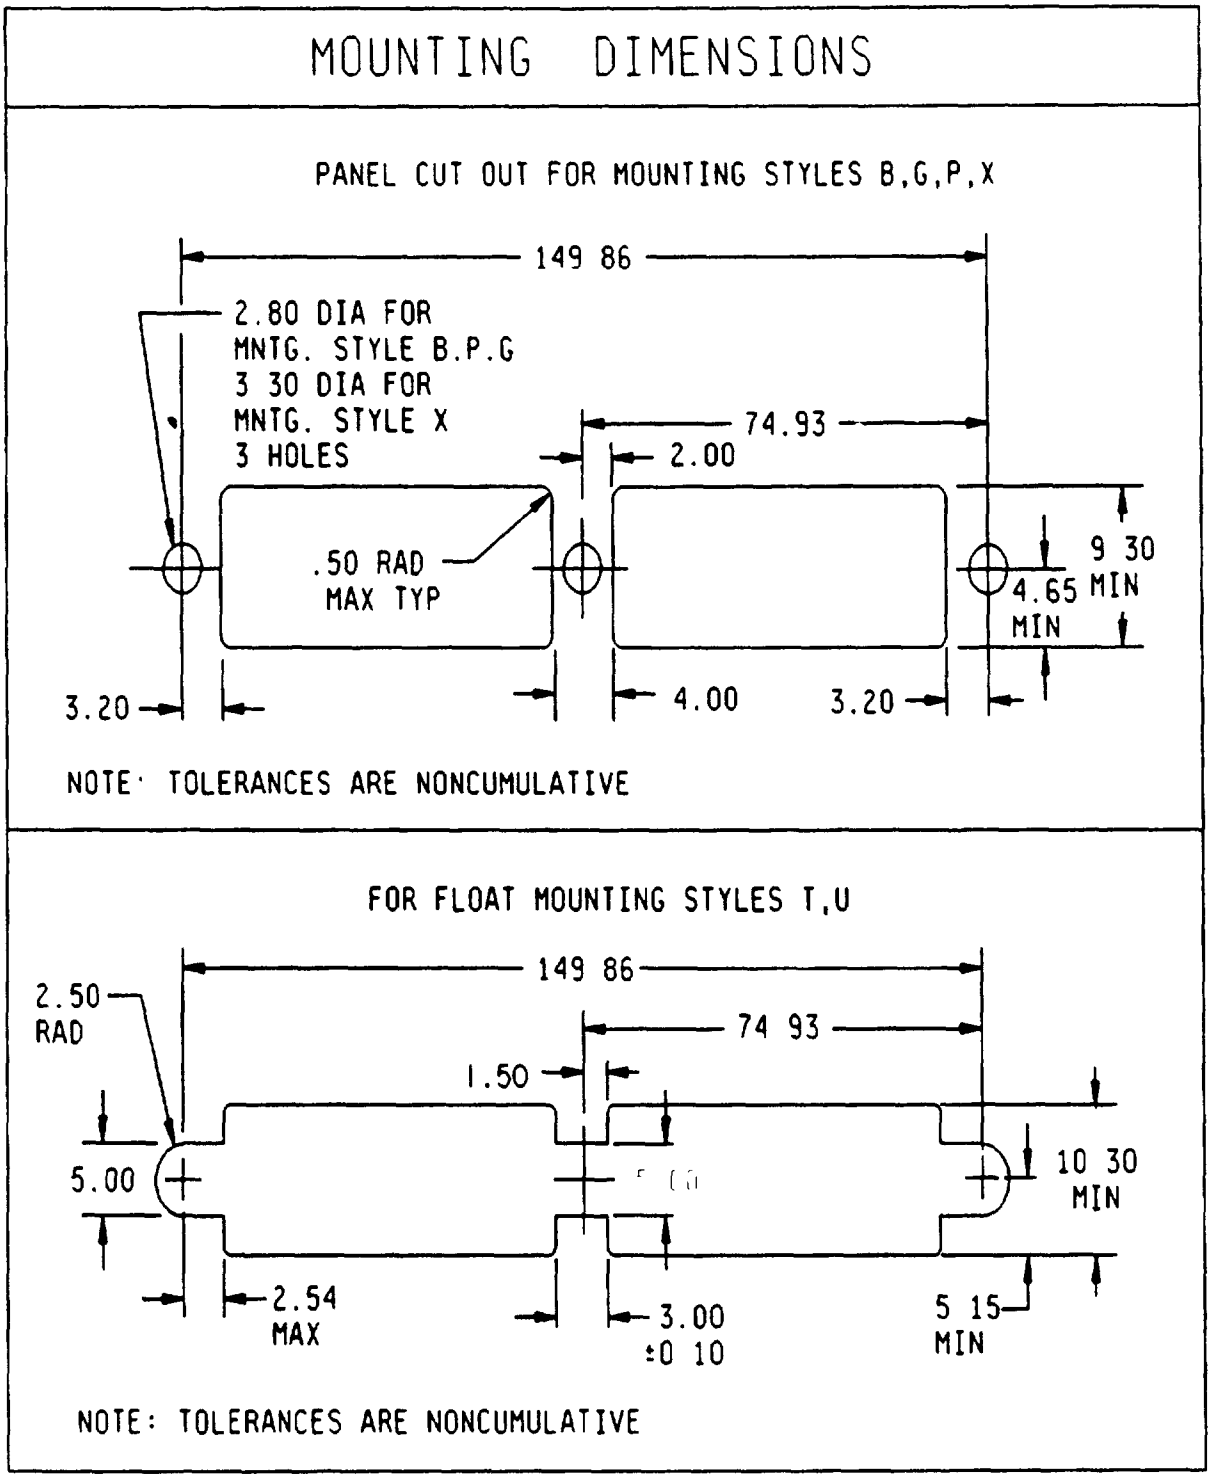

NOTE Dimensions are in millimeters

FIGURE 6 Mounting dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figures 1 through 5

Material

Insulators Diallyl phthalate in accordance with MIL-M-14

Guides and hardware. Brass in accordance with ASTM B36, B16, B124, B453, or B455, nickel plated in accordance with QQ-N-290 or AISI 300 series stainless steel or equivalent in accordance with QQ-S-763 or ASTM A582, passivated in accordance with QQ-P 35

Plating Plating in accordance with MIL-C-55302 or as noted below

Mating surface (pin and wire): Gold in accordance with MIL-G-45204, class 1, type II, grade C over nickel in accordance with QQ-N-290, 30-150 microinches

Terminations Solderable areas (including crimp barrels and wire wrap terminations) shall be gold in accordance with MIL-G-45204, type III, grade A, 10 microinches minimum thickness or gold in accordance with MIL-G-45204 type II, grade C, class 00 over nickel in accordance with QQ-N-290, 30 to 150 microinches thick Solderable areas must meet the requirements of MIL-STD-202, method 208

All other surfaces: Gold in accordance with MIL-G-45204, type II, grade C, 5 microinches minimum over nickel in accordance with QQ-N-290, 30-150 microinches

Contact identification. See figure 1

Contact separation forces

Minimum force 0 14 newton (0.50 ounce) with a 0.5800 millimeter (0.0228 inch)+0 005/-0.000 diameter pin after being cycled 3 times

Note: Steel pin test surface roughness to be 0.025 - 0 25 micron rms.

Unmating The maximum force of a connector assembly shall not exceed 0 53 newton (1 90 ounces) multiplied by the number of contact positions

Mating The maximum force of a connector assembly shall not exceed 0 70 newton (2 5 ounces) multiplied by the number of contact positions.

Contact retention minimum Functional value of 22.2 newtons (5 pounds), destructive test 35 3 newtons (8 pounds) maximum design and qualification value

Contact rating 5 amperes per line .

Durability: 2,000 cycles minimum

Dielectric withstanding voltage

Sea level. 1,400 V ac rms test

High altitude 300 V ac rms test.

Keying Rotation of guides, 6 positions each, 36 possible combinations

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

Connector Part or Identifying Number (PIN)

Example	D55302/	164	D	160	L
Specification number					
Specification sheet number					
Type of contact and termination (see figures 1 and 2)					
Number of contacts					
Guide hardware number (see figures 4, 5, 6 and table I)					

Revision letters are not used due to the extensiveness of the changes

CONCLUDING MATERIAL

Custodian
Army - CR

Review activities:
Army - AR, AT, AV, ME, MI
DLA - ES

Preparing activity
Army - CR

Agent:
DLA - ES

Project 5935-A418-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.