INCH-POUND
MIL-R-55342/6E
28 June 1995
SUPERSEDING
MIL-R-55342/6D
26 January 1990

MILITARY SPECIFICATION


RESISTORS, FIXED, FILM, CHIP, ESTABLISHED RELIABILITY STYLE RM0705

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RM0705, fixed, film chip, resistors. This style is available in characteristics H, E, K, and M, resistance tolerances .1, 1, 2, 5, and 10 percent, and all termination materials except termination P.

1.2 Military Part or Identifying Number (PIN). Chip resistors covered by this specification shall be identified by a military PIN which shall consist of the basic number of this specification and a coded dash number. The military PIN shall be in the following form:

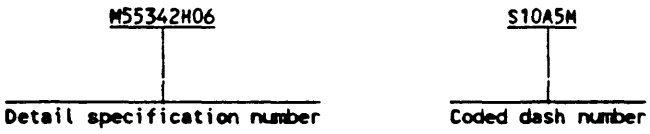

The coded dash number shall be derived in accordance with MIL-R-55342.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification. The following specification forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-R-55342 - Resistors, Fixed, Film, Chip, Established Reliability, General Specification for.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Research Laboratory, Physical sciences Directorate, ATTN: AMSRL-PS-DC, Fort Monmouth, NJ 07703-5601, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of the document or by letter.

AMSC N/A FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:12Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-R-55342 and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1, as applicable.

3.3. Power rating. The power rating for characteristics K and M shall be 100 milliwatts. For characteristics H and E, the power rating shall be 50 milliwatts.

3.4 Voltage rating. The maximum continuous working voltage shall not exceed 50 volts.

3.5 Resistance. Minimum and maximum resistance value shall be as follows:

Resistance tolerance	Minimum resistance	Maximum resistance
±0.1 percent	100 ohms	300,000 ohms
±1.0 percent	5.62 ohms	1 megohm
±2.0 percent	5.6 ohms	1 megohm
±5.0 percent	5.6 ohms	1 megohm
±10 percent	5.6 ohms	1 megohm

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-R-55342.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-55342.


6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)


6.1 Notes. The notes specified in MIL-R-55342 are applicable to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:12Z
Check the source to verify that this is the current version before use.

Configuration A

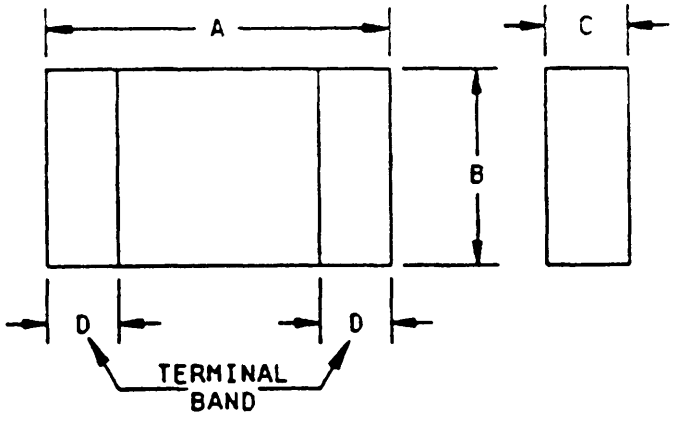

Configuration B

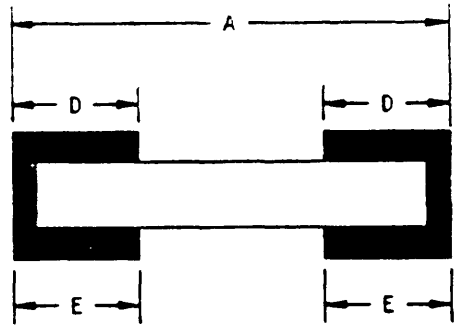

Inch	mm
.005	0.13
.006	0.15
.012	0.30
.015	0.38
.030	0.76
.033	0.84
.050	1.27
.075	1.91
.080	2.03

Configuration	Dimension A inch	Dimension B inch	Dimension C inch	Dimension D inch	Dimension E inch
A	.075 ±.005	.050 ±.005	.012/.030	.015 ±.005	N/A
B	.080 ±.006	.050 ±.005	.015/.033	.015 ±.005	.015 ±.005


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. The pictorial view of the styles above are given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope, and do not alter the functional aspects of the device are acceptable.
5. Configuration A covers termination materials D, S, T, and W.
6. Configuration B covers termination materials B, C, G, R, and U.

FIGURE 1. Style RM0705.


Source: https://assist.dla.mil -- Downloaded: 202610-22T23:12Z
Check the source to verify that this is the currentversion before use.

6.2 Supersession data. Prior to MIL-R-55342D, dated 1 September 1987, the PIN contained 17 digits. In order to meet the 15-digit PIN limitation, the slash and the dash were deleted and the PIN reformatted. The following are examples of the old and new part numbering systems:

OLD PIN FORMAT

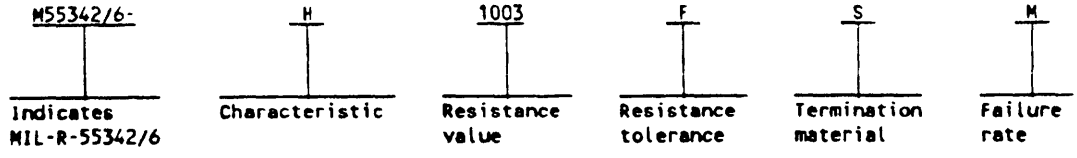

NEW PIN FORMAT

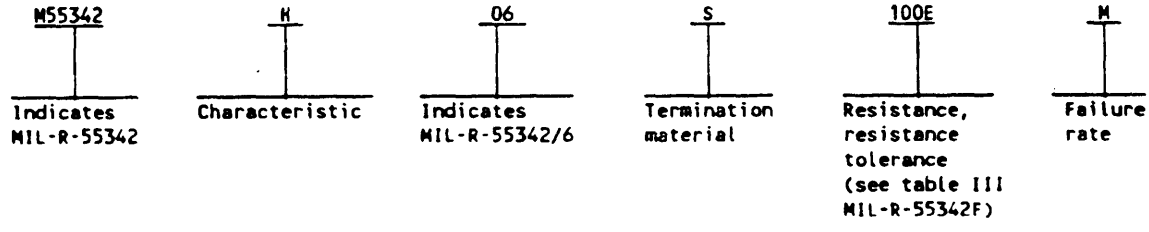

6.3 Tolerance for wraparound termination. The added tolerance for the wraparound type termination is intended to apply only to termination, metallization, and pretinning material.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, AV, ME
Navy - AS, CG, MC, OS
Air Force - 17, 19, 99
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-1409-06)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-R-55342/6E	2. DOCUMENT DATE (YYMMDD) 95/06/28

3. DOCUMENT TITLE

RESISTORS, FIXED, FILM, CHIP, ESTABLISHED RELIABILITY, STYLE RM0705

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US Army Research Laboratory	b. TELEPHONE (Include Area Code) (1) Commercial 908-427-3441 (2) AUTOVON 987-3441
c. ADDRESS (Include Zip Code) Physical Sciences Directorate ATTN: AMSRL-PS-DC Fort Monmouth, NJ 07703-5601	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:12Z
Check the source to verify that this is the current version before use.