MIL-P-60165(MU)
11 February 1965
SUPERSEDING
FA(FC)-PD-100
26 April 1961

MILITARY SPECIFICATION

POWER CONTROL A

1. SCOPE

1.1 This specification covers one type of power control circuit board, part of the Gun Direction Computer: M18 used to monitor temperature and cooling fan failures.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel: Packaging of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-C-46357	Computer, Gun Direction: M18; Manufacturing Processes and Inspection of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts

DRAWINGS

U. S. Army Munitions Command

F10526460	Power Control A

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEET

M14002 Data Sheet, Master Packaging

(Copies of specifications, standards, drawings and packaging data sheets, required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The power control shall be manufactured in accordance with Drawing F10526460 and drawings pertaining thereto.

3.2 General requirements.- The power control shall meet the following requirements of MIL-F-13926 and MIL-C-46357.

3.2.1 MIL-F-13926

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Workmanship

3.2.2 MIL-C-46357

a. Etched circuit assembly
b. Marking
c. Handling

3.3 Environmental service conditions.

3.3.1 Vibration.- The power control shall be subjected to a simple harmonic motion having an amplitude of 0.015 inch (0.030 inch total excursion). The frequency shall be varied uniformly from 10 to 55 cycles per second (cps) and return to 10 cycles. This cycle shall be traversed in 1 minute ± 15 seconds. The motion shall be applied to the power control for a period of 10 minutes in each direction of the 3 mutually perpendicular axes (total of 30 minutes), relative to its normal operational position. Subsequent to vibration, the power control shall not be damaged or adversely affected and shall meet the requirements of 3.4.

3.3.2 Shock.- The power control shall withstand 3 shock impulses in the vertical plane relative to its normal mounting position. The acceleration of the shock impulses shall be 5 gravity units (G's). Pulse duration of each impulse shall be 11 ± 1 milliseconds. Subsequent to shock the item shall not have been damaged or adversely affected and shall meet the requirements of 3.4.

3.3.3 Temperatures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

3.3.3.1 Operating.- The power control shall meet the requirements of 3.4.7 while exposed to temperatures of -40°F and +135°F.

3.3.3.2 Storage.- The power control shall meet the requirements of 3.4 at a temperature of between 60°F and 90°F after having been exposed to each temperature of -80°F and +160°F.

3.3.4 Humidity.

3.3.4.1 Operating.- The power control shall meet the requirements of 3.4.7 while exposed to an atmosphere with a relative humidity (RH) up to 97% at a temperature of +135°F.

3.3.4.2 Non-operating.- The power control shall meet the requirements of 3.4 after exposure to (and when thoroughly dried) an atmosphere with a RH of 100 percent including condensation, for a period of 4 hours.

3.3.5 Fungus resistance.- The power control shall show no evidence of damage and shall meet the requirements of 3.4, after being inoculated with the composite spore suspension specified in MIL-F-13926 and incubated at an ambient temperature of between 77°F and 84°F with a RH of 97 ± 2%.

3.3.6 Salt spray.- The power control shall show no evidence of physical damage and meet the requirements of 3.4.3 immediately after exposure to a fine mist of a 5% salt solution concentration. The solution shall have a specific gravity of from 1.0268 to 1.0413 and a pH between 6.5 and 7.2 at a temperature between 93° and 97°F.

3.4 Performance.- Unless otherwise specified the power control shall meet the performance requirements of this specification at standard ambient temperatures between 60° and 90°F and at a barometric pressure of 28 to 32 inches of mercury with a RH up to 90%.

3.4.1 Input voltages.- All the performance requirements of this specification shall apply upon application of minus 12 volts, direct current (Vdc) and plus 6 (Vdc) to the collector circuits and emitter circuits of the amplifier transistors respectively. The dc returns of the above voltage levels shall be to ground.

3.4.2 Alternating current (ac) reference signal.- All the performance requirements of this specification with the exception of requirement 3.4.3 shall apply upon application of a 7V ac, 400 cycle per second (cps) sine wave applied to the input circuit as specified in Table I.

3.4.3 Amplifier transistors.- With the conditions specified in paragraph 3.4.1 and the input resistance set to the values specified in Column A ot Table II the amplifier transistors shall be biased Class A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

TABLE I

Connect ac Reference Voltage to Pin	Connect ac Reference Voltage Return to Pin
29B	34B
23B	24B
15B	18B
2A	1B
49B	50B
46B	48A
64B	65B

TABLE II

Resistance Value in ohms ± 1%			Input D Pins	
A	B	C	From	To
10K	18K	18K	28B	34B
5.6K	2.7K	2.7K	20B	23B
5.6K	1.5K	5.6K	14B	15B
10K	22K	10K	2B	1B
3.9K	1.2K	1.2K	54B	49B
3.9K	2.2K	3.9K	43B	46B
22K	39K	22K	63B	65B

3.4.4 Phase detector transistors.

3.4.4.1 With the input resistance set to the values specified in Column A of Table II, the phase detector transistors shall be turned off.

3.4.4.2 With the input resistance set to the values specified in Column B of Table II, the waveform at the emitter of the phase detector transistor shall possess the characteristics specified by the waveform of Figure 1.

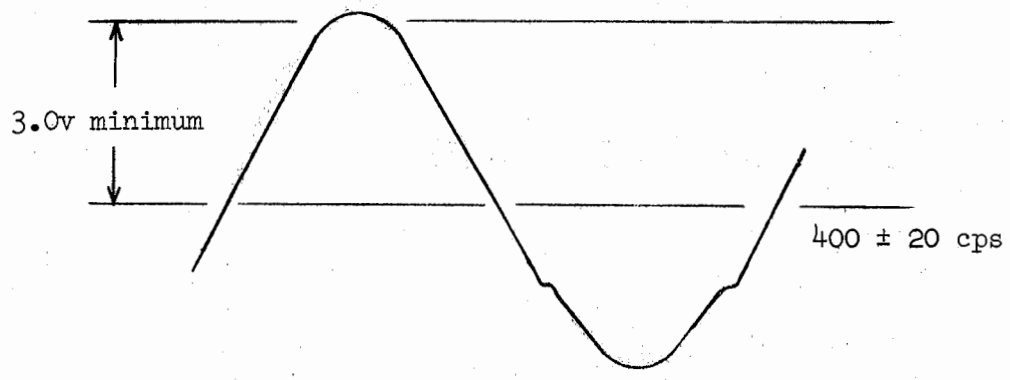


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

3.4.5 Switch transistors.

3.4.5.1 With the input resistance set to the values specified in Column A of Table II, the switch transistor shall possess the following characteristics:

(a) Emitter-to-collector voltage of the first switches (Q17, Q24, Q25), when in the ON condition, shall be minus 0.15 ± 0.15 Vdc.

(b) Emitter to base voltage of the second switches (Q20, Q26, Q27) and third switches (Q23, Q28, Q29) when in the OFF condition, shall be plus 0.5 Vdc minimum (min).

(c) Collector to power ground voltage of the second switches, when in the OFF condition, shall be minus 8.2 ± 0.6 Vdc.

3.4.5.2 With the input resistance set to the values specified in Column C of Table II, the switch transistors shall possess the following characteristics:

(a) Emitter to base voltage of the first switches, when in the OFF condition, shall be plus 0.5 Vdc min.

(b) Emitter to collector voltage of the second switches, when in the ON condition, shall be minus 0.15 ± 0.15 Vdc.

(c) Collector to ground voltage of the first switches, when in the OFF condition, shall be minus 6.2 ± 1.0 Vdc.

3.4.6 Buffer transistors. - The buffer transistor voltage output level shall be less than plus 1 volt and greater than plus 2 volts with the input resistance set to the values specified in Columns A and C of Table II respectively.

3.4.7 Circuit outputs. - The circuit output levels shall be -11 ± 1.3 volts dc in the true state and minus 0.15 ± 0.15 volt dc in the false state. The input resistance values shall determine the output state as specified in Tables III and IV.

TABLE III

Column A	Column B		Column C	Column D		Column E
Resistance Value in ohms ±1%	From Pins	To Pins	Direction Of Change	From Pins	To Pins	Specified Limits ohms
10K	28B	34B	Increase	41A	17B	13K ± 1.3K
5.6K	20B	23B	Decrease	12B	17B	4.1K ± 205
5.6K	14B	15B	Decrease	12B	17B	2K ± 160
10K	2B	1B	Increase	12B	17B	17K ± 1.7K
3.9K	54B	49B	Decrease	57B	17B	1.7K ±136
3.9K	43B	46B	Decrease	57B	17B	3K ± 150
22K	63B	65B	Increase	57B	17B	30K ± 3K

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

TABLE IV

Column A	Column B		Column C	Column D		Column E
Resistance Values in ohms ±1%	From Pins	To Pins	Values in ohms	From Pins	To Pins	Specified Limits ohms
10K	28B	34B	18K	41A	17B	12.5K ± 1.2K
5.6K	20B	23B	2.7K	12B	17B	4.2K ± 210
5.6K	14B	15B	1.8K	12B	17B	2.1K ± 168
10K	2B	1B	22K	12B	17B	16K ± 1.6K
3.9K	54B	49B	1.2K	57B	17B	1.8K ± 144
3.9K	43B	46B	2.2K	57B	17B	3.1K ± 155
22K	63B	65B	39K	57B	17B	29K ± 2.9K

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions. - The component inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 Inspection provisions.

4.2.1 Submission of product. - Unless otherwise specified herein, or by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" as specified in MIL-STD-105.

4.2.2 Examination and tests. - Except where otherwise specified herein, components and sub-assemblies shall be inspected in accordance with the "Inspection provisions for components and sub-assemblies" and the Sampling Plan Tables contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed in accordance with Tables V, VI and VII and the test methods and procedures in 4.5. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein.

4.2.3 Acceptance and rejection. - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

4.2.4 Functional tests. - The requirements and tests in Table V shall be inspected on a 100% basis. All examinations and tests shall be conducted at the standard ambient temperature (60° to 90°F).

TABLE V
(100 percent inspection)

	Characteristic	Requirement	Test Procedures
101.	Amplifier transistors	3.4.3	4.5.2.4
102.	Phase detector transistors	3.4.4	4.5.2.5
103.	Switch transistors	3.4.5	4.5.2.6
104.	Buffer transistors	3.4.6	4.5.2.7
105.	Circuit outputs	3.4.7	4.5.2.8

4.3 Control tests.

4.3.1 General. - One power control shall be selected at random as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table VI.

TABLE VI

	Control test	Requirement	Test Procedure
301.	Fabrication	3.1	Applicable drawings - Visual
302.	General specifications	3.2	MIL-F-13926 and MIL-C-46357 - Visual

4.3.2 Environmental. - Three units shall be selected at random as a control sample from each 50 produced or from each months production, whichever occurs first. The control samples shall have met the requirements and tests in Table V and shall then meet the requirements and tests in Table VII.

TABLE VII

	Control Test	Requirement	Test Procedures
303.	Vibration	3.3.1	4.5.1.1
304.	Shock	3.3.2	4.5.1.2
305.	Operating temperature	3.3.3.1, 3.4.7	4.5.1.4, 4.5.2.8
306.	Storage temperature	3.3.3.2, 3.4	4.5.1.4, 4.5.2
307.	Humidity - non-operating	3.3.4.2	4.5.1.3.1
308.	Humidity - operating	3.3.4.1, 3.4.7	4.5.1.3.2, 4.5.2.8.4
309.	Salt spray	3.3.6	4.5.1.6
310.	Circuit outputs(-40°& +135°F)	3.3.3.1, 3.4.7	4.5.2.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

4.3.3 Control test failure. - Should any one item of a control test sample fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.2.3).

4.4 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall supply equipment in accordance with the applicable requirements of MIL-I-45607. The Government reserves the right to use the test equipment for its own independent inspection to the extent that such use will not unduly interfere with the contractor's delivery schedule.

4.4.1 Contractor design. - The contractor shall provide inspection equipment compatible with the "Test Methods and Procedures" specified in 4.5 and with the "Component Inspection" and "Test facilities" requirements of Specification MIL-F-13926. Concept, construction, materials, dimensions, and tolerances used in design of test equipment shall be so selected and controlled as to insure that the test equipment will permit positive rejection of a product which exceeds the prescribed tolerance limit, and will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit. Construction shall be such as to facilitate routine calibration of the equipment.

4.4.1.1 Test equipment. - In conjunction with 4.4.1, the following test equipment shall be utilized in the performance of the applicable tests as specified in 4.5:

Item Number		Description
1.	Power Supply	Minus 12 vdc ± 2 percent, current rating equal to or greater than 55 ma., ripple equal to or less than 1% peak-to-peak, output impedance equal to or less than 2.0 ohms from dc to 500 kc.
2.	Power Supply	Plus 6 vdc ± 2 percent, current rating equal to or greater than 15 ma., ripple equal to or less than 1% peak-to-peak, output impedance equal to or less than 2.0 ohms from dc to 500 kc.
3.	AC Reference Voltage	7 v ± 10 percent rms, 400 ± 20 cps, sine wave, current equal to or greater than 100 ma, output impedance equal to or less than 10 ohms.
4.	Oscilloscope	Sensitivity: 25 rms millivolts per inch.
5.	Voltmeter	D. C., 0-20 volt range; input impedance greater than 10 meghoms.

4.5 Test methods and procedures.

4.5.1 Environmental.

4.5.1.1 Vibration. - The vibration test shall be made on a device with means provided for measuring and controlling the direction of vibration and adjusting the amplitudes and frequencies to keep them within the specified limits of 3.3.1. The measuring instruments of the testing device shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

capable of measuring the vibration amplitude within plus or minus 5 percent, and capable of measuring the frequency within plus or minus 2 percent. The test shall be performed in accordance with the requirements specified in 3.3.1 with the power control rigidly mounted in its normal operating position. Subsequent to the vibration test, the power control shall show no damage or defect resulting from the test when examined by visual and tactile means. The power control shall then be inspected as specified in 4.5.1.2 prior to determining compliance with requirements specified under 3.4.

4.5.1.2 Shock. - This test shall be conducted in accordance with Procedure II of the shock test defined in MIL-F-13926 except that the power control shall be shocked in the vertical plane only. The impact (shocks) and "G" value shall be in accordance with 3.3.2. A receiving device, representing the connector receptacle that receives the power control in the computer, shall be secured to the horizontal surface of the shock tester. Each end of the receiving device shall be clamped such that the female receiving slot will hold the unit in a vertical plane. The unit will then be inserted into the receiving device and shocked. Subsequent to imposing the number of impacts required, a visual examination shall be made for damages or defects to determine compliance with 3.3.2 and then the unit will be inspected as specified in 4.5.1.3 prior to determining compliance with 3.4 as required by 3.3.2.

4.5.1.3 Humidity.

4.5.1.3.1 Non-operating. - This test shall be conducted in accordance with the conditions in 3.3.4.2 and the humidity test defined in procedure I of Specification MIL-F-13926, except that the $4\frac{1}{2}$ hour period shall be reduced to 2 hours, the 6 hour period reduced to 2 hours, and the total test period shall not exceed $5\frac{1}{2}$ hours per cycle. The unit shall then be thoroughly dried and then subjected to the test in 4.5.1.3.2 prior to meeting the specified requirements of 3.4.

4.5.1.3.2 Operating. - This test shall be conducted in accordance with the humidity test defined in procedure III of Specification MIL-F-13926, except that the humidity shall be maintained at 97 ± 5 percent for the 24 hour period, and the test shall cease at the end of that period. (Method 106 of MIL-STD-202 shall be excluded). Throughout the test the unit shall be operated in accordance with paragraph 4.5.2.8.4 in compliance with 3.7.4 as required by 3.3.4.1.

4.5.1.4 Temperature. - (operating and storage): After being subjected to all environmental tests specified above, the power control shall be subjected to Test Procedure I specified in MIL-F-13926, except the temperatures specified in 3.3.3 shall apply. While at the operating temperature of 3.3.3.1 the power control shall be tested in accordance with 4.5.2.8 to determine compliance with the requirements of 3.4.7 as required by 3.3.3.1. The temperature shall then be returned to standard temperature (60° to 90°F) and the power control shall be tested in accordance with 4.5.2 to determine compliance with 3.3.3.2.

4.5.1.5 Fungus. - One of the first 5 power controls produced shall be submitted for testing in accordance with 3.3.5 and the fungus test defined in MIL-F-13926. After approval, subsequent acceptance for fungus requirements may be by certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

4.5.1.6 Salt spray. - The power control shall be subjected to the salt spray test defined in MIL-STD-202, Condition B. Immediately after exposure, the power control shall be inspected for any physical damage, then tested in accordance with 4.5.2.4 for compliance with 3.3.6.

4.5.2 Performance. - All tests of the power supply shall be performed under standard ambient conditions as specified in 3.4, unless otherwise specified.

4.5.2.1 Voltage polarity convention. - Whenever the potential difference existing between two points is measured, one of the two points shall be labeled the "From" point and the other shall be labeled the "To" point. The measured potential at the "From" point is more positive than that at the "To" point. "At" and "With respect to", may be substituted for "From" and "To" respectively.

4.5.2.2 Input voltages. - All the performance tests of this specification shall be performed when power supplies (items 1 and 2) are connected as specified in Table VIII and in accordance with 3.4.1.

TABLE VIII

Power Supply Volts dc	Connect Power Supply To Pin	Connect Power Supply Return to Pin
-12	6B	17B
+6	36B	17B

4.5.2.3 Alternating current (ac) reference signal. - All the performance tests of this specification shall be performed except 4.5.2.4 when the reference voltage (item 3) is applied to the input circuit as specified in Table I and 3.4.2.

4.5.2.4 Amplifier transistors. - Set the input resistance to the values specified in column A of Table II to the indicated pins of the power control. Using voltmeter (item 5), the voltages at pin 28A, pin 44B, Test Point (TP) 1, TP2, TP5, TP9 and TP11 with respect to pin 6B shall be plus 5.5 ± 0.8 vdc and in compliance with 3.4.3.

4.5.2.5 Phase detector transistors.

4.5.2.5.1 With the input resistance of column A Table II connected as specified, the voltages when checked with voltmeter (item 5) at pins 1A, 23A, 25A, 35A, 40B, 48B and 65A with respect to pin 17B shall be minus 0.1 ± 0.1 vdc to determine compliance with 3.4.4.1. Upon completion of this test, disconnect the input resistance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

4.5.2.5.2 The input resistance of column "B" Table II shall be connected to the indicated pins of the power control. The voltage and waveform when checked with oscilloscope (item 4) at pins 1A, 23A, 25A, 35A, 40B, 48B and 65A with respect to pin 17B shall be in accordance with figure 1 and 3.4.4.2. Upon completion of this test disconnect the input resistance.

4.5.2.6 Switch transistors.

4.5.2.6.1 The input resistance of column "A", Table II shall be connected to the indicated pins of the power control. Using voltmeter (item 5) take the measurements as specified in Table IX, they shall be in accordance with 3.4.5.1. At the completion of this test disconnect the input resistance.

TABLE IX

Measure From Pin	To Pin	Measurement Volts dc
TP19	17B	Minus 0.15 ± 0.15
4B	17B	Minus 0.15 ± 0.15
62B	17B	Minus 0.15 ± 0.15
TP15	17B	Plus 0.5 minimum
TP20	17B	Plus 0.5 minimum
TP23	17B	Plus 0.5 minimum
11B	17B	Plus 0.5 minimum
55B	17B	Plus 0.5 minimum
59B	17B	Plus 0.5 minimum
TP16	17B	Minus 8.2 ± 0.6
5B	17B	Minus 8.2 ± 0.6
61B	17B	Minus 8.2 ± 0.6

4.5.2.6.2 The input resistance of column "C", Table II shall be connected to the indicated pins of the power control. Using voltmeter (item 5) take the measurements as specified in Table X, they shall be in accordance with 3.4.5.2. At the completion of this test, disconnect the input resistance.

TABLE X

Measure From Pin	To Pin	Measurement Volts dc
TP14	17B	Plus 0.5 minimum
TP21	17B	Plus 0.5 minimum
TP22	17B	Plus 0.5 minimum
TP16	17B	Minus 0.15 ± 0.15
5B	17B	Minus 0.15 ± 0.15
TP19	17B	Minus 6.2 ± 1.0
4B	17B	Minus 6.2 ± 1.0
62B	17B	Minus 6.2 ± 1.0
61B	17B	Minus 0.15 ± 0.15

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

4.5.2.7 Buffer transistors.

4.5.2.7.1 The input resistance of column A, Table II shall be connected to the indicated pins of the power control. The voltages (using item 5) at TP13, TP17, TP18, pin 8B, pin 35B and pin 62A, with respect to pin 17B, shall be plus 1.0 Vdc maximum, in accordance with 3.4.6. Upon completion of this test, disconnect the input resistance.

4.5.2.7.2 The input resistance of column C, Table II shall be connected to the indicated pins of the power control. The voltages (using item 5) at TP13, TP17, TP18, pin 8B, Pin 35B, and pin 62A, with respect to pin 17B, shall be plus 2.0 vdc minimum. Upon completion of this test, disconnect the input resistance.

4.5.2.8 Circuit outputs.

4.5.2.8.1 The circuit output tests shall be performed with the dc power supplies (items 1 and 2) and the ac reference voltage (item 3) of Tables VIII and I connected to the indicated pins of the power control. This test shall be performed to determine compliance with the operating humidity and operating temperature requirements of 3.3.4.1 and 3.3.3.1 respectively as well as at the standard ambient requirements (60° to 90°F) when determining compliance with 3.4.7 .

4.5.2.8.2 Referring to Table III, the input resistance of column A shall be connected to the indicated pins of column B. The circuit output voltages (using item 5) at the pins specified in column D shall be minus 11 ± 1.3 vdc. In sequence, each resistance value, column A, shall be continuously varied in the direction specified in column C until the circuit output voltages changes from the minus 11 volt level to the zero volt level. The output voltage specified in Column D shall be minus 0.15 ± 0.15 vdc. The resistance value that causes the output to change shall be within the limits specified in column E. The input resistance shall be reset to the values of column A after each measurement. The input resistance shall remain connected for the following test, par. 4.5.2.8.3.

4.5.2.8.3 Referring to Table IV, the input resistance of column A are connected to the indicated pins of column B. In sequence, each resistance value, column A, shall be set to the value specified in column C from which it shall be varied toward the value of column A until the circuit output voltages at the pins specified in column D changes from minus 0.15 ± 0.15vdc to 11 ± 1.3 vdc. The resistance value that causes the output to change shall be within the limits specified in column E. The input resistance shall be reset to the values of column A after each measurement. At the conclusion of the test of this paragraph, disconnect the input resistance (column A).

4.5.2.8.4 Paragraphs 4.5.2.8.2 and 4.5.2.8.3 shall be repeated every 4 hours during humidity test, par. 4.5.1.3.2 to determine compliance with 3.3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. - Packaging, packing and marking shall be in accordance with Master Packaging Data Sheet M14002.

6. NOTES

6.1 Intended use. - The power control is intended to monitor extreme ambient temperatures conditions and to detect cooling fan failures. The power control board consists of the low memory temperature detector, the low and high temperature warning detector and the low and high temperature kickout detector circuits.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of preservation, packaging, and packing.
(c) Applicable packaging data sheet number (see 5.1).
(d) Applicable stock number.
(e) A block of serial numbers to identify each power control.

Custodian:
Army - MU

Preparing activity:
Army - MU

Project No. 1220-A171Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:13Z
Check the source to verify that this is the current version before use.