INCH-POUND

MIL-T-48586A (AR)
12 August 1993
SUPERSEDING
MIL-T-48586 (MU)
12 December 1975

MILITARY SPECIFICATION

TEST SET ASSEMBLY, DIODE SWITCH: 11736249

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for the Diode Switch Test Set Assembly, hereinafter referred to as the "test set" which is to be used to troubleshoot and verify performance of the Diode Switch used in Receiver-Transmitter RT-860, part of Radar Set AN/VPS-2 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4931

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the DODSSP - Customer Service, Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications . The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWING S (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10556104 - Connector, Bulkhead
11736249 - Diode Switch Test Set Assembly
9115C3039 - Connector, Rectangular

SPECIAL PACKAGING INSTRUCTION

PS 11736249 - Packaging of Diode Switch Test Set Assembly

(Copies of other Government documents, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 11736249, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the test set shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.

b. Inorganic protective surface finishings.

c. Part identification and marking.

d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The test set shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to the equivalent of 6000 miles of track-laying vehicle operational vibration as defined by MIL-STD-810 narrowband random-on-random data for equipment installed on the deck of the M113 armored personnel carrier.

3.3.2 Shock. The test set shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, duration 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude operating. The test set shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The test set shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40°F and +155°F.

3.3.4.2 Non-operating (storage). The test set shall not suffer permanent damage when subjected to the constant temperature extremes of -60°F for a period of 24 hours and +160°F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3 .4 and 3.5 when returned to room ambient .

3.3.5 Humidity (non-operating). The test set shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electronically continuous as specified on the schematic diagram of the test set.

3.5 Performance. The test set shall produce the outputs listed in Table I (Input and output requirements) when inputs and/or conditions are applied as described in 3.5.1 and Table I.

3.5.1 DC input voltages. DC input voltages to the test set shall be 28.0 ± 0.1 Vdc to W1 - pin 2 and -33.0 ± 0.1 Vdc to W1 - pin 6, both are with respect to ground (W1 - pin 7 and pin 4) . When the S2 switch is in the DYN position, the +28 Vdc supply shall deliver a maximum of 25 mAdc under no load conditions and 60 mAdc maximum under load conditions; under both conditions the -33 Vdc supply shall delivery 7 mAdc maximum.

3.6 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

S2 SWITCH POSITION	INPUT	CONDITIONS	OUTPUT
INL	M1 read 40.0 ± 5.0 ma 60.0 ± 5.0 ma	W2 at Gnd. R4 fully CCW R4 fully CW	-- --
ISO	50.0 ± 5.0 ma (at -33 V)	520 ohms ± 5% between W2 and gnd.	--
DYN 1/	Pulse train at J2: P.R.F. 20.0 ± 0.5 KHz P.W. 0.5 µs P. Ampl. 18 V into 50 ohm load	W2 open (no load) 680 ohms ±5% between W2 & gnd. (load)	Pulse train at W2 & J1: P.R.F. 20.0 ± 0.5 KHz P.W. not less than 2.48 µs, not more than 2.62 µs P. Ampl. not less than +22 V and not less than -22 V P. Delay: Not more than 0.3 µs Same as no load except: P.Ampl. +12 to +14 V and not less than -22 V

1/ See Figure 1. Pulse Waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

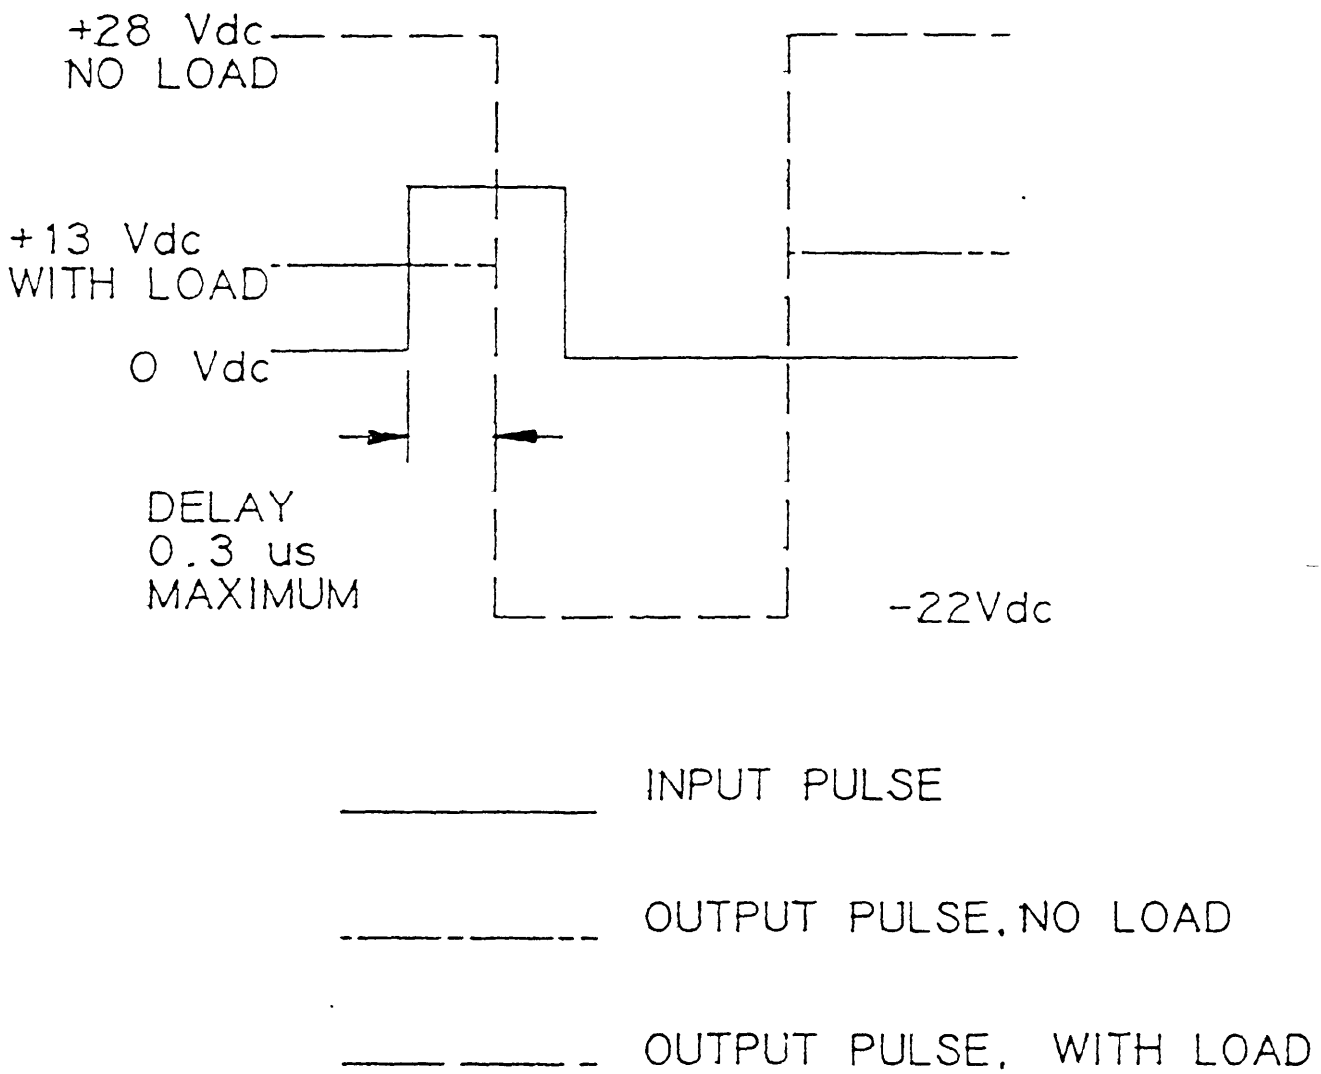


FIGURE 1. Pulse waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 . General provisions . Unless otherwise specified herein, the provisions of MIL-F-13926 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Special sampling inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50°F to +90°F
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches Hg

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in the quantities indicated.

Name	Drawing	Quantity
Test Set	11736249	1

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in Table II (Functional tests) and Table III (Special sampling) herein and be inspected for compliance with any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of an assembly, component or test specimen to comply with any of the requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies.

The contractor's quality program or detailed inspection plan shall provide assurance of compliance of all characteristics with the applicable drawings and specifications utilizing as a minimum the conformance criteria specified in this document and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

b. Unless otherwise specified herein or provided for in the contract, alternative quality conformance procedures, methods or equipment, such as statistical process control, tool control, other types of sampling plans, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions herein. Prior to applying such alternative procedures, methods or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.3). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality conformance provisions(s) herein. In case of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 shall be performed as specified in 4.4.2.3 and 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

TABLE II. Functional tests (100 percent inspection).

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major 101. Electrical 102. Performance	 3.4 3.5	 4.7.2 4.7.3
Minor	None	N/A

4.5 Special sampling. One test set out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table II and shall then meet the requirements and tests in Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling.

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major 103. Vibration 104. Shock 105. Altitude 106. Temperature 107. Humidity (nonoperating)	 3.3.1 3.3.2 3.3.3 3.3.4 3.3.5	 4.7.1.1 4.7.1.2 4.7.1.3 4.7.1.4 4.7.1.5
Minor	None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test, as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 wherever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the standard test equipment listed in Table IV (Test equipment list) shall be utilized in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE IV. Test equipment list.

Item Number	Description
1. Power supply	28.0 ± 0.1 Vdc; less than 1.0 mV ripple and noise; 300 mA capacity
2. Power supply	33.0 ± 0.1 Vdc; less than 1.0 mV ripple and noise; 300 mA capacity
3. Pulse generator	Capable of delivering pulses 0.5 µs wide, less than 15 ns rise time, +18 V amplitude, at a PRF of 20.0 ± 0.5 KHz, into a 50 ohm load
4. Digital voltmeter	0 to 50 Vdc, accuracy ±0.1% of full scale
5. Dc milliammeter	0 to 100 mA, accuracy ±2% of full scale
6. Oscilloscope	Dual vertical channel plug in. Vertical passband: DC to 33 MHz Rise time: 11 ns. Vertical deflection factor: 50 mV/cm to 10 V/cm ± 3%. Horizontal deflection: 0.1 µs/cm to 5 s/cm
7. Termination	50 ohms, ±1%, 6.5 watts
8. S1 test harness	As specified in Figure 2. See Table V for test harness parts list
9. S3 test harness	As specified in Figure 3. See Table VI for test harness parts list

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE V. S1 test harness parts list.

Designation	Nomenclature	Description
R1	Resistor	680 ohm, 5%, 1.2 watts
S1	Switch	SPDT

TABLE VI. S3 test harness parts list.

Designation	Nomenclature	Description
P/N 10556104	Connector, bulkhead	Jack, TPS
P/N 9115C3039	Connector, rectangular	Receptacle, TPS
S3	Switch	SPDT
R2	Resistor	520 ohms, ±5%, 1.7 watts

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.

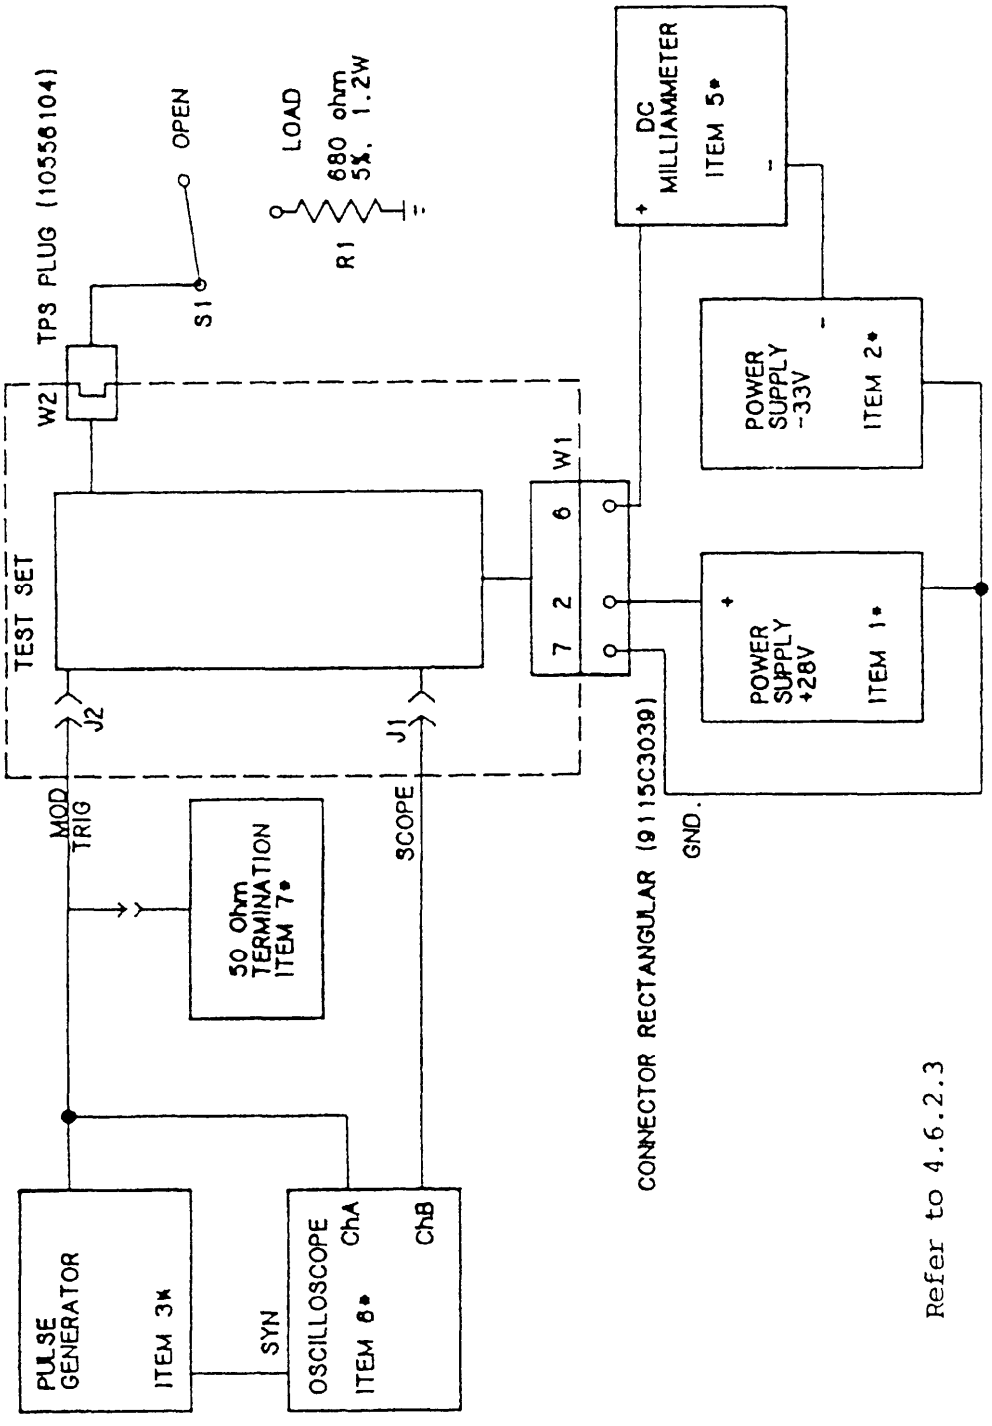


FIGURE 2. Dynamic test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.

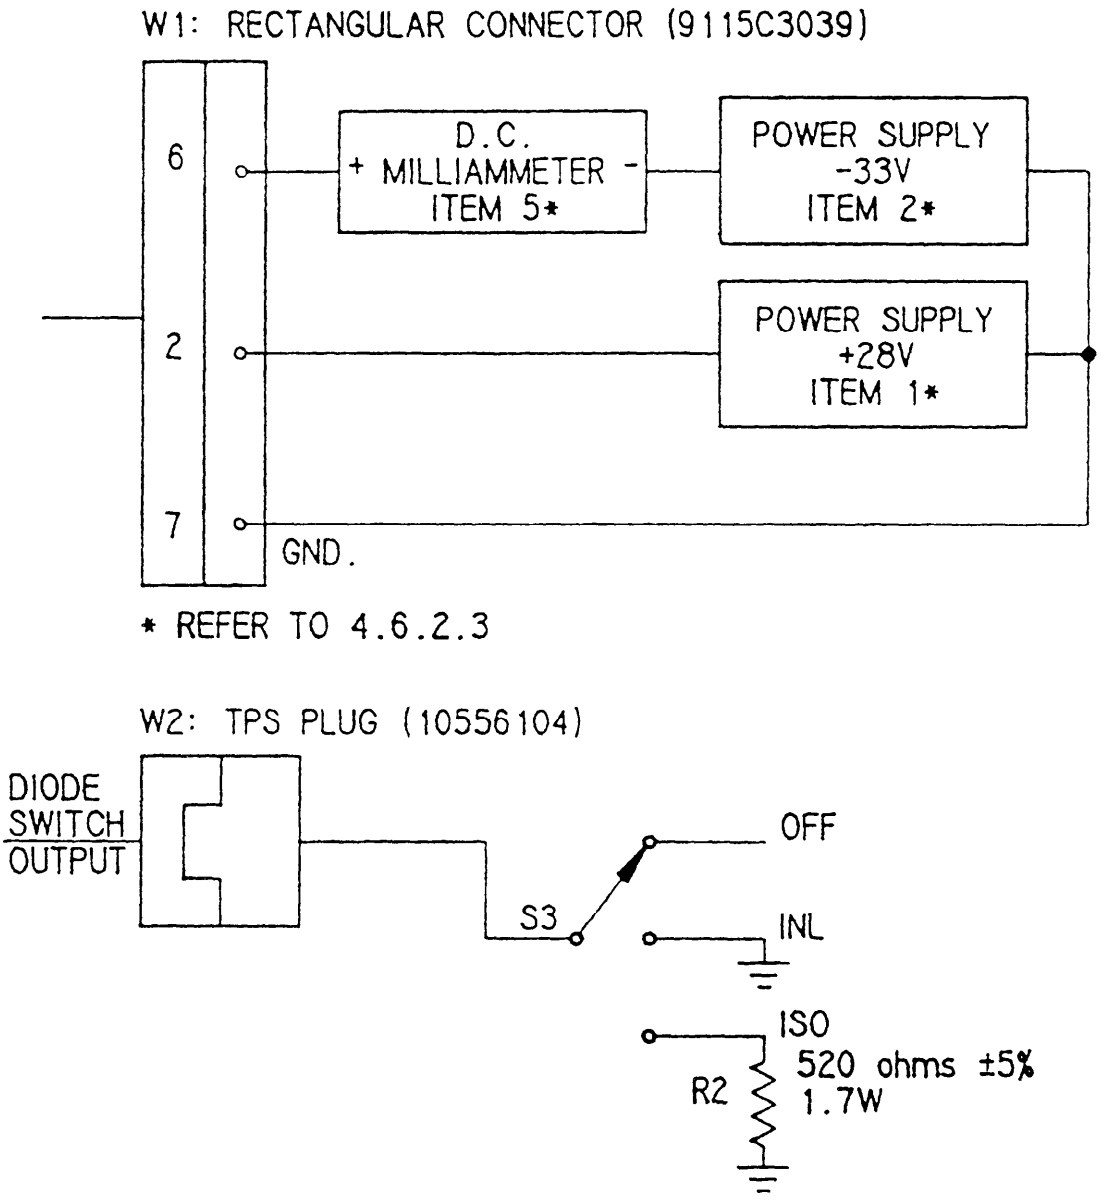


FIGURE 3. Insertion and isolation test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I of MIL-STD-810 and paragraph 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The test set shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the test set shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that :

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the test set shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating). This test shall be performed as specified in Procedures II, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2, 4.7.3, for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. The selected test set shall be tested as specified in 4.7.3.1 through 4.7.3.4 to determine compliance with 3.5.

4.7.3.1 DC input voltages. Apply +28.0 Vdc ± 0.1 (Table IV, item 1) to W1-pin 2 and -33.0 Vdc ±0.1 (Table IV, item 2) to W1-pin 6 using W1-pin 7 and W1-pin 4 as return; check voltages with the digital voltmeter (Table IV, item 4). When in DYN (S2 switch position) test mode, monitor current meters Ml and DC milliammeter (Table IV, item 5) to insure conformance to maximum current requirements of 3.5.1.

4.7.3.2 Insertion test. Set switch S2 to INL position, turn current adjust knob fully CCW, and grid. W2 (switch S3 to INL position); Ml shall indicate 40.0 ± 5.0 ma. With same conditions, except current adjust knob turned fully CW, Ml shall indicate 60.0 ± 5.0 ma. See Figure 3.

4.7.3.3 Isolation test. Set switch S2 to IS0 position, insert DC milliammeter (Table IV, item 5) in series with -33 Vdc Power Supply (Table IV, item 2), and connect 250 ohm + 5% resistor (R2) between W2 and ground (switch S3 to ISO position); the DC milliammeter (Table IV, item 5) shall indicate 50.0 ± 5.0 ma. See Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T19:32Z
Check the source to verify that this is the currentversion before use.

4.7.3.4 Dynamic test. Switch S2 to DYN, connect test equipment and test set as shown in Figure 3. Adjust pulse generator (Table IV, item 3) to deliver input signal specified in Table I (DYN). Use oscilloscope (Table IV, item 6) to measure input and output voltages under both no load (S1 to open) and load (S1 to load) conditions to insure conformance to Table I (DYN) requirements.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instruction PS 11736249.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The test set shall be used to trouble-shoot and verify performance of the diode switch which is used in Receiver-Transmitter RT-860/VPS-2, part of Radar Set AN/VPS-2.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification

b. Issue of DODISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.1.1).

c. Requirements for submission of first article sample.

d. Applicable stock number.

e. Packaging requirements, if other than specified in Section 5.

f. Serialization requirements, if applicable.

g. Certificate of conformance for each lot or shipment of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

6.3 Submission by the contractor.

a. Inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

b. Alternative quality conformance provisions for approval. Unless otherwise specified in the contract, proposed alternative quality conformance provisions will be submitted by the contractor for evaluation to the technical activity responsible for the preparation of this specification.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Fire Control System
Radar Set AN/VPS-2
Receiver-Transmitter RT-860/VPS-2
VADS

6.6 Changes from Previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 4931-A287)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and re letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarificatio requirements on current contracts. Comments submitted on this form do not constitute or imply authorizat waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
3. DOCUMENT TITLE		

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.