
INCH-POUND
MIL-B-49450/1A(ER)
8 November 1994
SUPERSEDING
MIL-B-49450/1(ER)
16 January 1987

MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, INTERCELL CONNECTORS

This specification is approved for use by the Army Research Laboratory, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-49450.

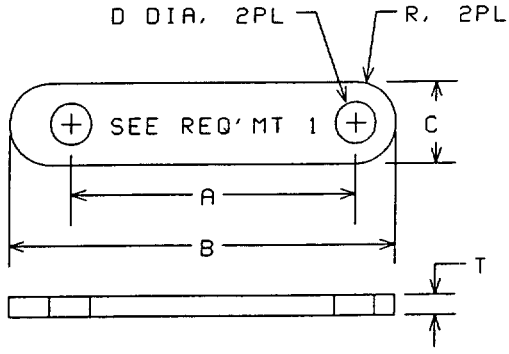

Ⓐ denotes changes

CONNECTOR DIMENSIONS.

PART NUMBER	A ±.015	B ±.015	C ±.015	D ±.010	R ±.031	T ±.010
M49450/1-1	.940	1.315	.375	.209	.281	.062
M49450/1-2	1.015	1.390	.375	.209	.281	.062
M49450/1-3	.980	1.355	.375	.209	.281	.062

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part number shall be stamped using .125 inch characters, .005 inch deep minimum before plating.

Ⓐ 2. Strap shall be constructed of copper alloy conforming to ASTM-B133, ASTM-B272, or ASTM-152.

3. Strap shall be plated in accordance with QQ-N-290, Class 1, Grade E.

DRAWING NOTES:

1. All dimensions are in inches, unless otherwise specified.

Preparing Activity:
Army-ER

(Project 6140-A798)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.