MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, CELL VENT ASSEMBLY

This specification is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cell vent assembly described herein shall consist of this document and the latest issue in effect of Specification MIL-B-49450(ER).

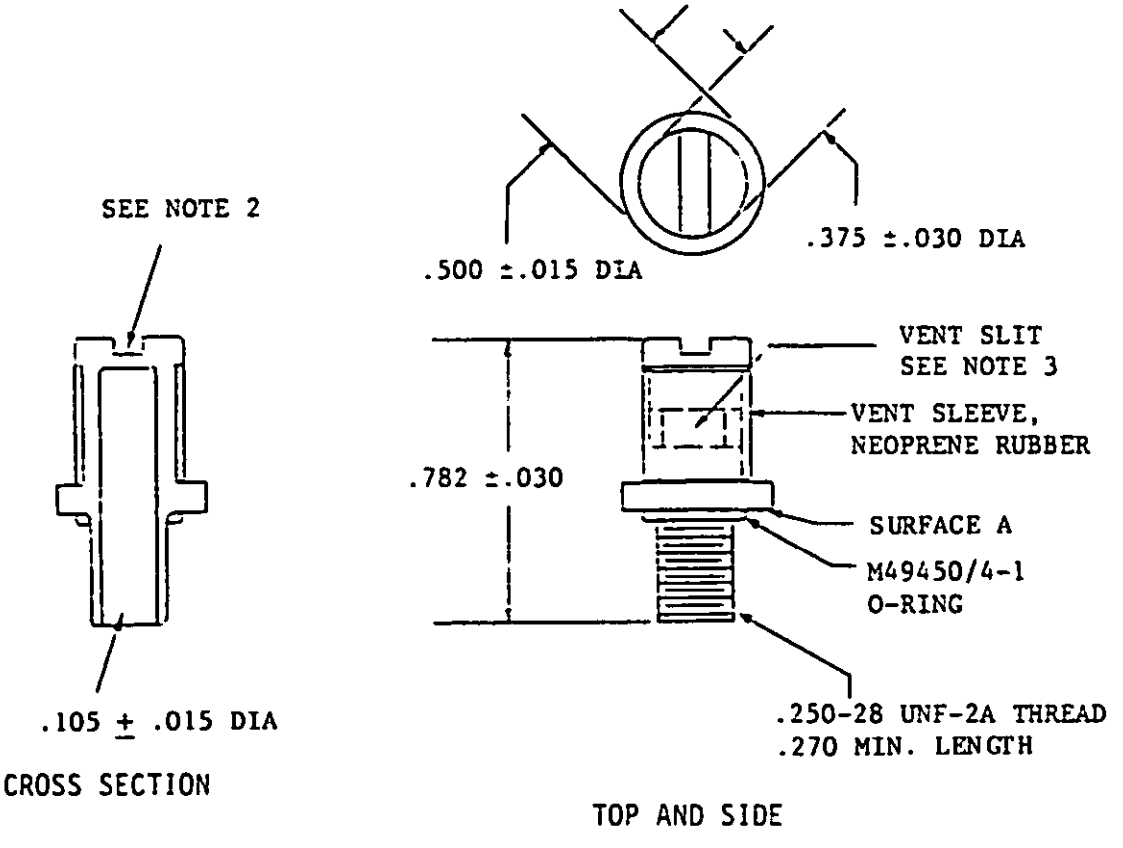


FIGURE 1. M49450/4 VENT ASSEMBLY.

FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. The vent plug shall be made of Polyamide or equal material. The Polyamide material shall be compounded to be static proof and shall conform to ASTM D4066-82, Class PA811. The vent shall be colored neutral.

2. The vent shall open at 6 ± 4 psi.

3. The vent plug shall withstand 10 in-lb of torque with no damage and provide an airtight seal for the cell at a torque of 3.5 ± 1.0 in-lb.

4. The O-Ring shall be made of Ethylene Propylene Rubber or equal material.

DRAWING NOTES:

1. All dimensions are in inches, unless specified otherwise.

2. Slot dimensions - .050 ± .015 in. wide and .070 ± .015 in. deep.

3. Slit dimensions (minimum) - .060 in. high and .300 in. across.

4. Distance from end of thread to surface A shall be .035 ± .010 inch.

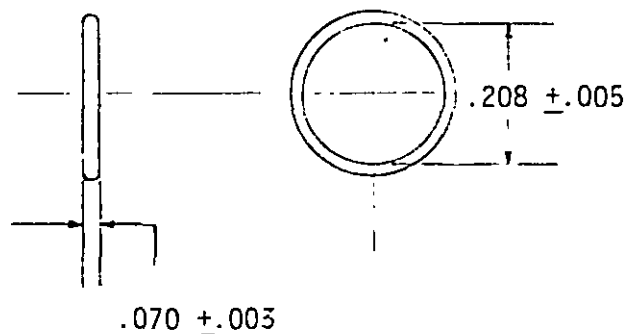


FIGURE 2. M49450/4-1 O-Ring.

Preparing Activity:
Army-ER

(Project 6140-A601-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.