INCH-POUND

MIL-PRF-49471/11A(CR)
30 November 2000
Superseding
MIL-PRF-49471/11(ER)
2 June 1995

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, HIGH PERFORMANCE, BA-X800/U

This specification is approved for use within Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification and MIL-PRF-49471(CR).

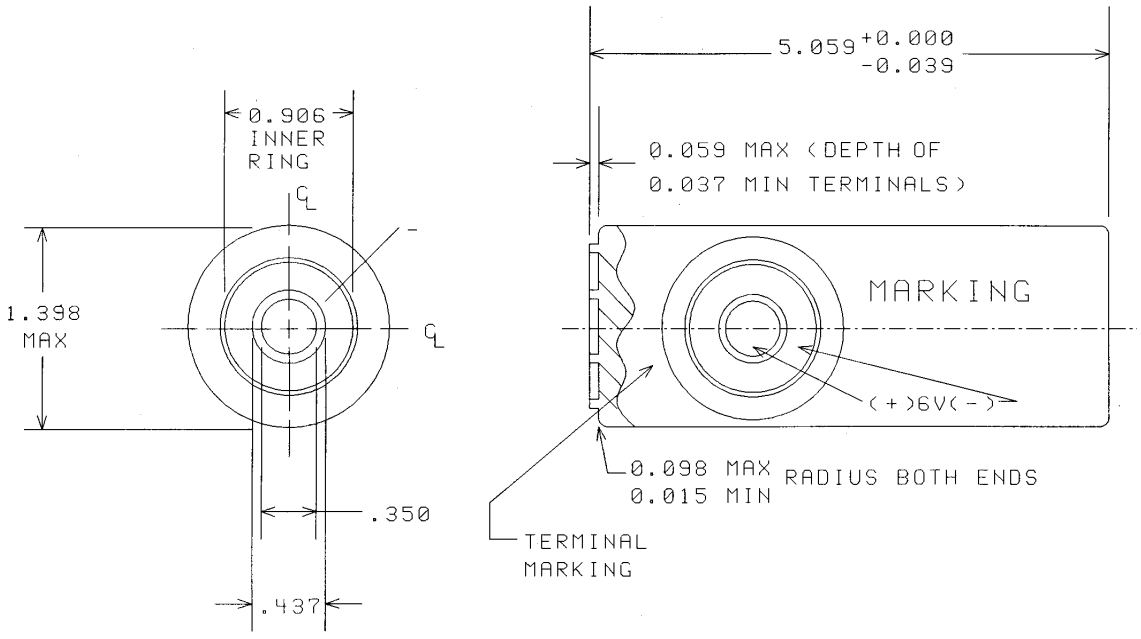

Figure 1. Battery dimensions and terminal markings.

DISTRIBUTION STATEMENT A. Approved for public release;distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Tolerances, unless otherwise specified, are ±0.004 for decimals.

3. Electrical terminal contacts are 0.01 inches thick Minimum. This shall be certified in the First Article Test Report.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 6.60 volts.

Cut-off voltage for capacity: 4.00 volts.

Weight (maximum): 0.72 pound (327 grams).

Battery short circuit test: Applicable.

Charge protection: Applicable.

High temperature protection: Applicable.

Complete discharge device: Applicable.

State of Charge Indicator: Not applicable.

Capacity tests: When the battery is tested in accordance with the method of examination and tests of this specification, the minimum capacity requirements shall be as specified below:

Capacity Test	Minimum Capacity Requirements in Hours to 4.00 volts
I	3.2
L	1.7
H	5.6
HT	5.4
LT	1.5
IT	2.8
LR1	48.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Initial voltage delay: During the I, H, HT, and IT discharge test, initial voltage below 4.00 volts cannot exceed a 5.0 second duration. During the L and LT discharge tests, initial voltages below 3.80 volts cannot exceed a 60.0 second duration.

METHODS OF EXAMINATION AND TESTS:

Capacity test:

(1) Storage:

Details on storage conditions for all capacity tests are specified in the basic specification.

(2) Discharge:

Cells (forced discharge): Two cells shall be discharged at 2.0 amperes at 70±5°F to 2.0 volts. Each discharged cell shall then be connected in series to one fresh cell. Each string shall be discharged at 2.0 amperes at 70±5°F for 3.2 hours.

Batteries: For all capacity tests, except the LR1, H and HT, the batteries shall be discharged at 2.0 amperes constant current to cut-off volts (zero volts for the LR1 test). For the H and HT capacity tests the batteries shall be discharged through 2.0 amperes constant current for five minutes followed by open circuit for five minutes. This cycle shall be repeated until the closed-circuit voltage reaches cut-off volts. For the LR1, the batteries shall be discharged at 135 milliamperes to 4.5 volts, then at 1.1 watts to 1 volt.

Forced Discharge: After discharge to zero volts on the I capacity test, batteries shall be forced discharged at 2.0 amperes for a minimum of 5 minutes.

Overload test: Batteries shall be discharged at 4.0 amperes.

Abuse test, predischarge: Designated samples shall be discharged at 2.0 amperes for 1.6 hours.

Abuse test, pulse discharge: Batteries shall be discharged at 2.5 amperes for 1 minute followed by 1.8 amperes for 4 minutes, cycled continuously to cut-off voltage.

Closed-circuit voltage test (battery and cell string): Load resistance of 2 ohms shall be used. Voltage shall be above 4.00 volts within 10 seconds.

Cell closed circuit voltage test: Load resistance of 1 ohm shall be used. Voltage shall be above 2.0 volts within 5 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army – CR

Preparing Activity:
Army - CR

(Project 6135-0417-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.