PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, HIGH PERFORMANCE, BA-5368/U

This specification is approved for use within the Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF-49471.

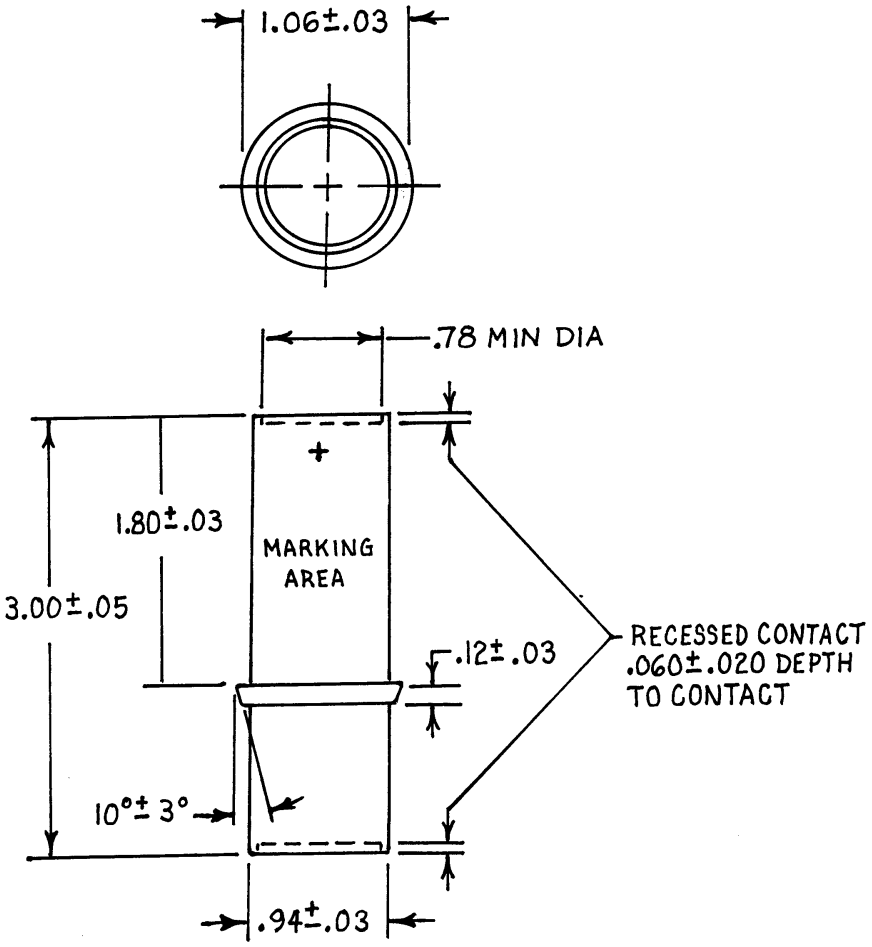


Figure 1. Battery dimensions.

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Notes:
All dimensions are in inches.

REQUIREMENTS:
Dimensions and configuration: See figure 1.

Nominal voltage: 12 volts.; End Voltage 9 volts

Usual cell connection: Series.

Terminals: flat surface.

Weight (Maximum): 5.1 ounces.

Charge Protection: Not Applicable.

Safety features: Not Applicable.

High temperature device: Not Applicable.

Complete discharge device: Not Applicable.

First Article Capacity: (FAD=16 hrs or better)

Discharge**:** The battery shall be discharged through 250 ohms continuously to a test end voltage of 9.0 volts

Capacity tests**:** When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

| Capacity test | Minimum Capacity in Hours to 9.0 volts |
|---|---|
| I | 16 |
| L | 15 |
| H | 15 |
| HT | 14 |
| LT | 14 |
| IT | 15 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Labeling and marking. All labeling and marking shall be clear and legible throughout all the tests specified herein. Labeling and marking shall be in black. Jackets may have the labeling and marking embossed or die-depressed, in which
case it may be the same color as the background.

Labels. Each battery shall have a label positioned as specified in figure 1. If there is insufficient space to show all required information on one face of the battery, it shall be continued on another face. There shall be no information on the label other than the following.

BATTERY, NON-RECHARGEABLE, Chemistry
Type designation
National Stock Number
(Contract Number)
(Cage Code)
Manufacturer's Name
(Trade name may also be used)
Manufacturer's plant
Manufacturer's Date Code

DO NOT CHARGE, SHORT CIRCUIT, INCINERATE, OR MUTILATE THIS BATTERY
OTHERWISE BATTERY MAY VENT OR RUPTURE RELEASING TOXIC MATERIALS

EXAMPLE:

BATTERY, NON-RECHARGEABLE, $LiMnO_2$
BA-5368/U
6135-00-000-0000
DAAB07-98-C-0123
80063
JANE DOE COMPANY
JADOCO
BATTERYVILLE, N.J., U.S.A.
0296

DO NOT CHARGE, SHORT CIRCUIT, INCINERATE, OR MUTILATE THIS BATTERY
OTHERWISE BATTERY MAY VENT OR RUPTURE RELEASING TOXIC MATERIALS



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

The following shall be applied to all packaging.

Capacity after storage at various temperatures

$68^0$F ($20^0$C) 5 years greater than 85% capacity
$113^0$F ($45^0$C) 5 years approximately 75% capacity
$140^0$F ($60^0$C) 60-180 days less than 25% capacity

Custodian:
Army – CR

Preparing activity:
Army - CR

(Project 6135-0371)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.