PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, HIGH PERFORMANCE, BA-5347/U

This specification is approved for use within the Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF-49471.

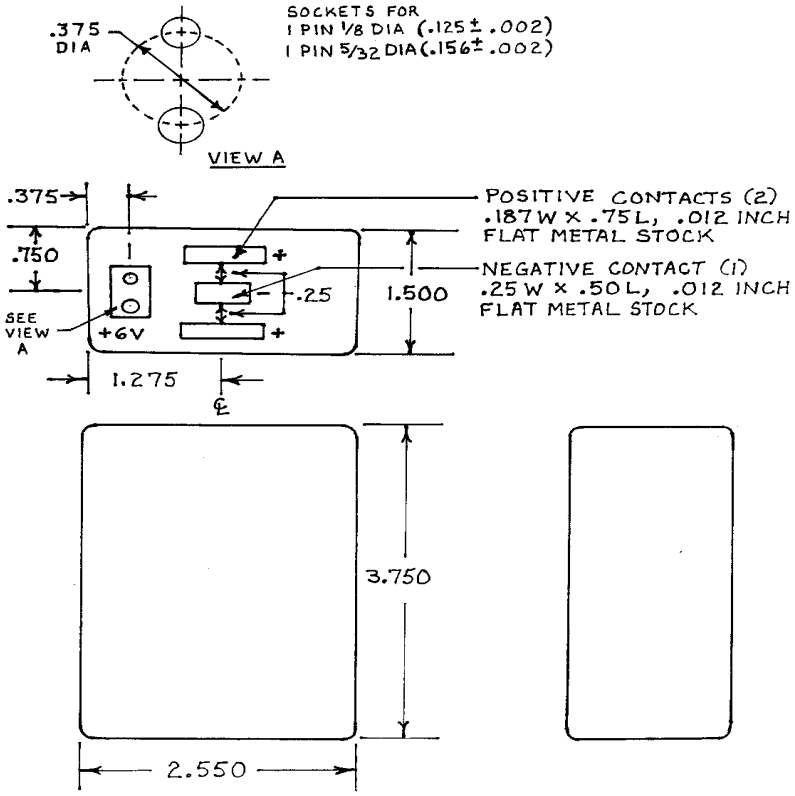

Figure 1. Battery dimensions.

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. The tolerance shall be ±0.031 inch unless otherwise specified.

2. The dual connectors shall be wired in a parallel 6 volt circuit.

3. Socket
   a. Pin circle center shall be on the battery center line.

   b. Minimum depth of the socket shall be 5/8 inch.

   c. Shall float 1/32 inch minimum in all directions from pin circle center.

4. Flat Contacts:
   a. The center negative contact shall be on both battery center lines.

   b. Shall be supported and mounted that the top surface shall not protrude above the outside surface of the battery jacket.

   c. Shall not be more than 1/8 below the outside surface of the battery jacket initially, during, and after contact is made mating contact springs.

REQUIREMENTS:
Dimensions and configuration**:** See figure 1.

Maximum voltage**:** 6.8 volts under 1250 ohms

Minimum Voltage 4 volts

Usual cell connection: Series.

Dual Terminals: Two (2) hole female sockets per View A of Figure 1, Three (3) flat contacts as per Figure 1

Weight (Maximum): 0.60 pounds (272 grams).

Charge Protection: Applicable.

State of Charge: Not Applicable.

Safety features: Applicable, the applicable high temperature shall be 370 ± 5^{0}F.

High temperature device: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Battery Enclosure: Applicable.

Connector Test: Not required

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

Capacity test	Minimum Capacity in Hours to 4.0 volts
I	2.5
L	1.3
H	5.0
HT	4.8
LT	1.2
IT	2.3

Initial voltage delay: During the I, H, HT, and IT discharge tests initial voltages below 4.00 volts cannot exceed a 5.0 second duration. During the L and LT discharge tests initial voltage below 3.80 volts cannot exceed a 60 second duration.

METHODS OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage:
Details on storage conditions for all capacity tests are specified in the basic specification.

(2) Discharge:
Cells (forced discharge): Two cells shall be discharged at 3.0 amperes at 70 ± 5^{0}F to 2/3 of open-circuit voltage. Each discharged cell shall then be connected in series to one fresh cell. Each string shall be discharged at 3.0 amperes at 70 ± 5^{0}F to 2/3 open circuit voltage of the one fresh cell.

Batteries: For all capacity tests, except the H and HT, the batteries shall be discharged at three amperes constant current to zero volts. For the H and HT capacity tests the batteries shall be discharged through three amperes constant current for five minutes followed by open circuit for five minutes. This cycle shall be repeated until the closed-circuit voltage reaches zero volts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Battery Closed Circuit voltage test: Load resistance of 3 ohms shall used. Voltage shall be above 4.50 volts within 5 seconds.

Cell Closed Circuit Test: Load resistance of 1.50 ohms shall be used. Voltage shall be 2/3 of the cells minimum useful open circuit voltage within five seconds.

Labeling and marking. All labeling and marking shall be clear and legible throughout all the tests specified herein. Labeling and marking shall be in black. Jackets may have the labeling and marking embossed or die-depressed, in which case it may be the same color as the background.

Labels. Each battery shall have a label positioned on face of battery. If there is insufficient space to show all required information on one face of the battery, it shall be continued on another face. There shall be no information on the label other than the following.

BATTERY, NON-RECHARGEABLE, Chemistry
Type designation
National Stock Number
(Contract Number)
(Cage Code)
Manufacturer's Name
(Trade name may also be used)
Manufacturer's plant
Manufacturer's Date Code

DO NOT CHARGE, SHORT CIRCUIT, INCINERATE, OR MUTILATE THIS BATTERY OTHERWISE BATTERY MAY VENT OR RUPTURE RELEASING TOXIC MATERIALS

EXAMPLE:

BATTERY, NON-RECHARGEABLE, $LiMnO_2$
BA-5374
6135-00-000-0000
DAAB07-98-C-0123
XXXXX
JANE DOE COMPANY
JADOCO
BATTERYVILLE, N.J., U.S.A.
0296

DO NOT CHARGE, SHORT CIRCUIT, INCINERATE, OR MUTILATE THIS BATTERY OTHERWISE BATTERY MAY VENT OR RUPTURE RELEASING TOXIC MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

The following shall be applied to all packaging.

Capacity after storage at various temperatures

68^0F (20^0C) 5 years greater than 85% capacity
113^0F (45^0C) 5 years approximately 75% capacity
140^0F (60^0C) 60-180 days less than 25% capacity

Custodian:
Army – CR

Preparing activity:
Army - CR

(Project 6135-0373)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.