INCH-POUND
MIL-DTL-32172 (OS)
05 DECEMBER 2005

DETAIL SPECIFICATION

INITIATOR, CARTRIDGE ACTUATED JAU-72A/A

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the manufacture and acceptance of the JAU-72A/A Initiator, Cartridge Actuated (Initiator) used for the external Initiator handle on the V-22 Emergency Escape Hatch Removal System (EEHRS).

1.2 Application. This Initiator was developed for use in the Emergency Egress Hatch Removal System as the external Initiator and is used at all six location on V-22 Aircraft, and its variants. No changes to the configuration willl be permitted without the authorization from the Indian Head Division, Naval Surface Warfare Center, Code 50.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4 and 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents specified in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation (see 6.2).

Comments, suggestions, or questions on this document should be addressed to Commander, Indian Head Division, Naval Surface Warfare Center, Technical Information Branch (Code 4230), 101 Strauss Avenue, Indian Head, Maryland 20640-5035, or emailed to amanda.penn@navy.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 1377
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-D-23615 Design and Evaluation of Cartridge Actuated Devices

STANDARDS

MILITARY

MIL-STD-1168 Ammunition Lot Numbering

(Copies of these documents are available online at Http://assist.daps.dla.mil/ or from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

NAVAL AIR SYSTEMS COMMAND (CAGE Code 30003)

3205AS107 Initiator, Cartridge Actuated JAU-72A/A

3205AS109 Cord, Detonating Assembly

(Application for copies should be addressed to the Commanding Officer, Naval Air Technical Service Facility, 700 Robbins Avenue, Philadelphia, PA 19111-5079.)

2.3 Non-Government publications and drawings. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents are those cited in the solicitation (see 6.2).

BELL-BOEING DOCUMENTS (CAGE Code 77272)

901-947-784 Emergency Escape Hatch Removal System Specification

901-947-034 V-22 Vibration Test Report

(Application for copies of Bell-Boeing documents should be sent to Boeing Defense and Space Group, Helicopter Division, P.O. Box 16858, Philadelphia, PA 19142-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

UNIVERSAL PROPULSION COMPANY (UPCO) DRAWINGS (CAGE Code 17610)

52380	Initiator Assembly, External
52280	TLX Transfer Line, Primer/High Explosive
TN 18751-1	Functional Test Firing Setup

(Application for copies of UPCO drawings should be sent to UPCO, P.O. Box KK, Fairfield, CA 94533-0659)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 1742	Standard Practice for Radiographic Inspection

(Copies of this document are available online at http://www.astm.org or from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, superseded applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to the first article inspection, Table I, and the first article test plan in Table II, as specified in sections 4.2.1 and 6.3. A first article inspection shall be required if two years or more has passed since the Initiator or a similar item were manufactured, major turn over in personnel, major changes to the production facility or transfer of production to a new facility or site.

3.2 Flight critical part. The Initiator's are flight critical items, as defined in 6.4.1, and relate to personnel safety and emergency egress and as such the technical data package shall be identified and procured as such.

3.3 Design and construction. The following applies to the qualification status and configuration control of the Initiators over the entire life of the item.

3.3.1 Identical configuration. The Initiator's design and construction shall be identical to that subjected to qualification testing as documented on 3205AS107, and approved for service use by the Navy

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

3.3.2 Configuration control. This item is a configuration-controlled device. Only the Initiator's procured from the vendor(s) listed on drawing 3205AS107 are approved for the application specified.

3.4 Initiator production. The Initiators shall be manufactured in accordance with drawings listed on 3205AS107. Each production Initiator shall meet the requirements of 3.4.1 through 3.4.2.4 as outlined in Table I. Failure of any Initiator to meet the requirements of section 3.4 and Table I shall result in rejection of the lot of Initiators.

3.4.1 Visual inspection. The Initiator shall be free of the following defects: illegible, missing or inaccurate markings, damage, burrs, dents, sharp edges, chipped or incomplete protective finish, or other defects which may prevent the installation of the Initiator. Each Initiator shall meet the requirements on the drawing 3205AS107 and 4.3.1.1 and 4.3.1.2.

3.4.2 In-process inspections. The following are the minimum in-process inspections required for product integrity.

3.4.2.1 Corrosion. All components scheduled for use in production shall be free of corrosive products (see 4.1.3)

3.4.2.2 X-ray examination. Prior to installing the flange and associated mounting nut each Initiator shall be x-rayed along the longitudinal axis. When radiographs are examined in accordance with 4.3.2, the Initiator shall show proper assembly; presence of all parts, and sealing in accordance with approved radiographic inspection criteria. The radiographic inspection shall show no foreign materials present. All defects shall be identified on the film and defective Initiators removed from the lot.

3.4.2.3 N-ray examination. Prior to installing the flange and associated mounting nut each Initiator shall be N-rayed along the longitudinal axis. When radiographs are examined in accordance with 4.3.2, the Initiator shall show proper order, presence and condition of parts in accordance with approved radiographic inspection criteria. All defects shall be identified on the film and defective Initiator's removed from the lot.

3.4.2.4 Arming Force Verification. Each Initiator handle subassembly will be 100% inspected in accordance with 4.3.3 for correct arming force between 6 to 15 lbs and functioning during the manufacturing process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

Table I. First Article /Production inspections.

Test Sequence	Test Paragraph	Requirement Paragraph
1. Visual	4.3.1	3.4.1
2. Corrosion	4.1.3	3.4.2.1
2. Radiographic X-ray Inspection	4.3.2	3.4.2.2
3. Radiographic N-ray Inspection	4.3.2	3.4.2.3
4. Arming Force Verification	4.3.3	3.4.2.4

3.5 Initiator First Article Test environmental exposure. The Initiator shall meet all requirements of 3.5.1 through 3.5.5 and the acceptance criteria of 4.4.

3.5.1 Vibration. The Initiator shall not function or incur any internal/external damage or degradation when vibration cycles are applied in accordance with 4.3.4. Initiators will then be subjected to x-ray inspection per 3.4.2.2 and then subjected to shock testing per 3.5.2.

3.5.2 Shock. The Initiator shall not function or incur any internal/external damage or degradation when saw tooth shocks are applied in accordance with 4.3.5. Initiators will then be subjected to x-ray inspection per 3.4.2.2 and then functionally tested per 3.5.5.

3.5.3 Temperature-shock/humidity/altitude (TSHA) cycling. The Initiator shall not function or incur any internal/external damage or degradation when subjected to TSHA cycling in accordance with 4.3.6. The Initiators will be visually inspected per 3.4.1 and then subjected to functional testing per 3.5.5.

3.5.4 Six-foot drop. The Initiator shall not initiate or incur any major internal/external damage or degradation as a result of the six-foot drop test in accordance with 4.3.7. The Initiators will be visually inspected per 3.4.1 and then subjected to functional testing per 3.5.5.

3.5.5 Functioning. The Initiator shall meet the requirements of 3.5.5.1 through 3.5.5.4, when fired in accordance with 4.3.8 between the temperature range of –65°F and +200 ^{o}F.

3.5.5.1 Arming Force. The Initiator shall arm with an applied force of 6 to 15 lbs. between the temperature range of –65°F and +200°F per 4.3.8.1.

3.5.5.2 Reset. The handle shall be capable of being reset prior to its being extracted from the housing assembly per 4.3.8.2. Once activated (pulled past the detent pins) the Initiator shall not be capable of being reset.

3.5.5.3 Lanyard playout. The lanyard shall be 120.0 $\pm$ 0.5 inches long. The lanyard shall freely unwind its complete length without any seizures per 4.3.8.3

3.5.5.4 Actuation Force. The Initiator shall fire when the specified actuation force is applied across the operational temperature range per 4.3.8.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The Initiator shall be constructed and finished in a manner to assure compliance with all requirements of this specification and associated drawings.

4. VERIFICATION

4.1 Classification of inspections.

a. First article inspection (see 4.2.1)
b. Production inspection (see 4.2.2)
c. Lot acceptance inspection (see 4.2.3)

4.1.1 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in 4.2.1, 4.2.2 and 4.2.3.

4.1.2 Interchangeability. The contractor shall conduct inspections of the production lot to verify total interchangeability of the mounting provisions and port connection.

4.1.3 Corrosion. To meet the requirements of paragraph 3.4.2.1, all parts shall be visually inspected to assure there are no corrosion products on the hardware.

4.2 Inspections.

4.2.1 First article inspection. Unless otherwise specified in the contract or purchase order (see 6.2), a first article inspection sample of 24 Initiators conforming to the drawing 3205AS107, shall be subjected to first article testing. These Initiators shall be inspected to the requirements of Table I. Twenty-one (21) of these Initiators shall be expended in the tests listed in Table II and the Government shall retain the remaining three for investigative purposes. Any damage inflicted by the environmental exposures, which would adversely affect the performance or service life of the item in service application shall be cause for rejection of the first article sample. Any production prior to notification by the contracting agency of the first article sample acceptability shall be at the contractor's risk. Failure of any Initiator to comply with the requirements of section 3 shall be cause for rejection of the first article represented.

4.2.2 Production inspection. To meet the requirements of 3.5, all production Initiator manufactured under the contract shall be inspected and screened for defects. Initiators failing to meet the requirements listed in Table I shall be rejected and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

TABLE II. First article test plan.

Test Sequence	Test Para.	Req. Para.	Sample Groups					
			I	II	III	IV	V	VI
1. Visual	4.3.1	3.4.1	6	3	3	3	3	3
2. Radiographic X-ray	4.3.2	3.4.2.2	6	3	3	3	3	3
3. Radiographic N-ray	4.3.2	3.4.2.3	6	3	3	3	3	3
4. Vibration	4.3.4	3.5.1	6					
5. Shock	4.3.5	3.5.2	6					
6. TSHA	4.3.6	3.5.3		3				
7. 6 Foot Drop	4.3.7	3.5.4			3			
8. Function test: -65°F ± 5°F 70 ± 5°F 200 ± 5°F	4.3.8	3.5.5	 2 2 2	 1 1 1	 1 1 1	 3	 3	 3

4.2.3 Lot acceptance inspection. Lot acceptance inspection shall consist of the examinations and tests specified in Table III. Failure of any sample Initiator to comply with the requirements listed in Table III shall be cause for rejection of the lot represented. Packaging defects shall be corrected before acceptance.

Table III. Lot acceptance inspection and tests.

Inspection/Test	Test Paragraph	Requirement Paragraph	Quantity
1. Visual Inspection	4.3.1	3.4.1	100%
2. Radiographic X-ray Inspection	4.3.2	3.4.2.2	100%
3. Radiographic N-ray Inspection	4.3.2	3.4.2.3	100%
4. Functional test: -65 ± 5°F 70 ± 5°F 200 ± 5°F	4.3.8	3.5.5	See Table II or Table IV

4.2.3.1 Sample size. A random sample of Initiator's from each production lot, including the samples retained for investigate purposes, shall be selected in accordance with Table IV for lot acceptance inspection. Test sample and retained samples shall not be applied as part of the quantity specified for delivery by the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

Table IV. Lot acceptance sampling.

Lot Size	Number of Test Samples		
	-65F	+70F	+160F
5-50	3	3	3
51-90	4	4	4
91-150	5	5	5
151-200	6	6	6
201-500	7	7	7

4.3 Inspections and tests.

4.3.1 Visual inspections.

4.3.1.1 Initiator inspection. The external condition and appearance of the Initiator shall be determined by comparison to drawing 3205AS107. Specific inspections of the warning label, warning streamer, Detonating Cord Assembly port, mounting provisions, proper color and correct data on label shall be conducted at a minimum. Each Initiator shall meet the requirements of 3.4.1 and 3.6.

4.3.1.2 Packaging inspection. The condition of the packaging (inner container), packing (outer container), and markings shall be determined by comparison to the contract requirements and guidance information of section 5 and 6.

4.3.2 Radiographic examination. Radiographic examination shall be conducted in accordance with ASTM-E 1742. All Initiator shall be identified with serial numbers beginning with 001 prior to examination. The Initiator shall be arranged on boards or trays in consecutive order, with any missing serial numbers identified on the radiographic plate. Each radiograph shall carry a permanent identification of the items displayed thereon in a 4 x 6-inch region maximum. The radiographic identification shall include the drawing number, the complete lot number in accordance with MIL-STD-1168, the contract number, and the span of serial numbers displayed. Radiographs of the entire production lot shall accompany the ballistic sample to the activity conducting the lot acceptance tests. Any observable imperfections as outlined in 3.4.2.2 and 3.4.2.3, shall be cause for rejection of the Initiator. Defective Initiators found during radiographic review are to be marked on the radiographic plate and removed from the production lot. Setting on the radiographic equipment shall be noted on the radiographic review sheets.

4.3.3 Arming Force Verification. During the sub-assembly manufacturing process the arming force per 3.4.2.4 shall be 100% verified and documented on work sheets traceable to Initiator serial numbers. Sub-assemblies that fail to meet the requirement may be reworked or removed from the production lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

4.3.4 Vibration. Per Bell-Boeing documents 901-947-784 and 901-947-034 the Initiator shall be subjected to the following vibration profiles: 2 units at -65°F, 2 units at 70°F, and 2 units at 160°F. Each subscale Initiator shall be subjected to the combined source dwell and random excitation environments or individual source dwell and random excitation environments as applicable at -65°F, +70°F and +160°F in each axis for 20 minutes.

a. Conduct a resonance survey for each Initiator configuration in each of the three mutually perpendicular axes both prior to and following exposure to the source dwell environment. Conduct a low level (0.5 g peak), 5-500 Hz sweep at a frequency rate of 1/2 octave per minute (15 minutes duration) with a tolerance equal to ± 10% on the vibration amplitude and ± 2% or 1 Hz, to determine the Initiator configuration's resonant frequency and transmissibility. The same Initiator of each configuration and same mounting location on the vibration fixture will be utilized for both the pre- and post-source dwell frequency surveys. The resonant frequency shall be considered to be any natural frequency with an amplification factor of 2.0 or greater output response relative to the input level. The Initiator response shall be measured on the least supported location or a location shown to have significant amplification. All resonance surveys will be conducted at ambient temperature. Following the completion of the source dwell vibration testing at -65°F and 160°F, the Initiator must be returned to ambient temperature prior to completion of the post-source dwell resonance survey.

b. Predicated upon the outcome of the resonance survey, source dwell vibration and random vibration excitation are to be conducted simultaneously. If based upon the resonance survey, the four desired test frequencies exceed the permitted test frequencies and the source dwell vibration and random excitation cannot be applied simultaneously, the source dwell vibration levels shall be increased by 0.5 g.

Source dwell vibration shall be performed at each of the four amplitudes and frequencies established based upon the resonance survey along each of the three- (3) mutually perpendicular axes. Source dwell input levels are shown in Table III and shall include the superimposed broad band random background levels of the random excitation as described in 4.3.4.c.

c. Random excitation shall be a flat spectrum at 0.02 g^2/Hz over the bandwidth from 10-2000 Hz as shown in figure 2.

d. The following tolerances apply to all vibration testing:

(1) Instantaneous random vibration acceleration peaks shall be limited to three (3) times the RMS acceleration (3-sigma clipping).

(2) The random vibration spectrum shall be within the tolerance range of ± 3 dB between 10 and 2000 Hz except deviations of ± 6 dB are permissible over a cumulative bandwidth of 200 Hz maximum between 500 and 2000 Hz.

(3) Overall RMS acceleration levels must be within ± 1.5 dB of the nominal input level.

(4) Sine tones must be within ± 10% of the nominal value.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

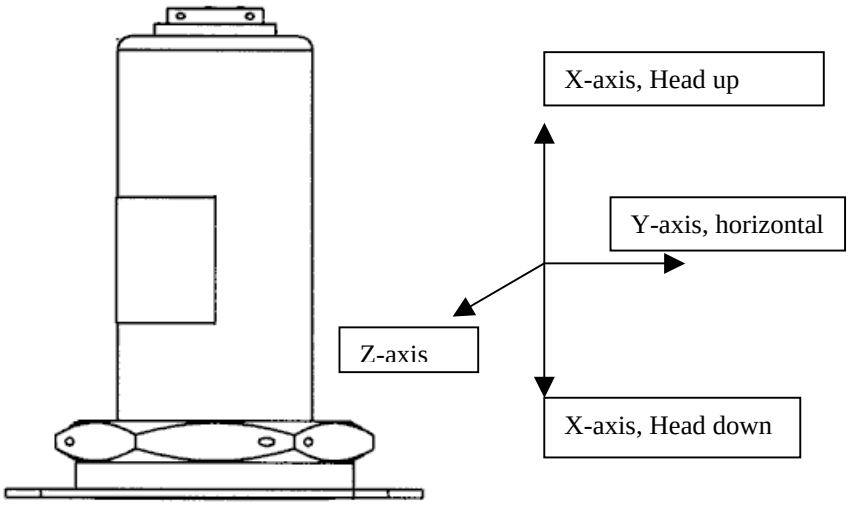


Figure 1. Shock / Vibration and 6-Foot Drop Axis

4.3.5 Shock. Per 901-947-784 the Initiator with protective caps installed in the manifold ports, shall be submitted to the shock test to the levels in Figure 3, three (3) shocks in each direction along each of the three (3) axis for a total of eighteen (18) shocks. All shocks will be conducted at ambient temperature.

Table V. Source Dwells Input Levels for Figure 2.

	Frequency (Hz)	Peak (g's)
1	16.6	1.7
2	19.8	2.0
3	33.3	2.5
4	39.7	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

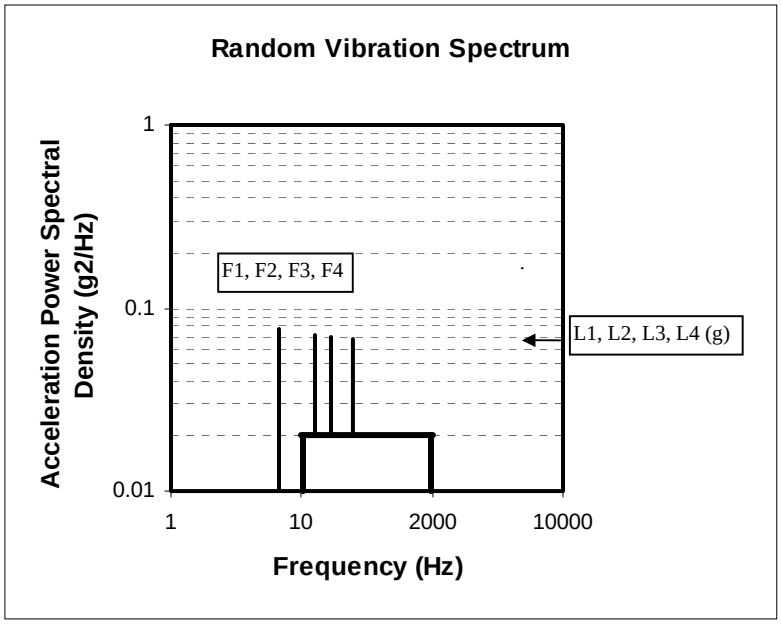


Figure 2. Random Vibration Spectrum

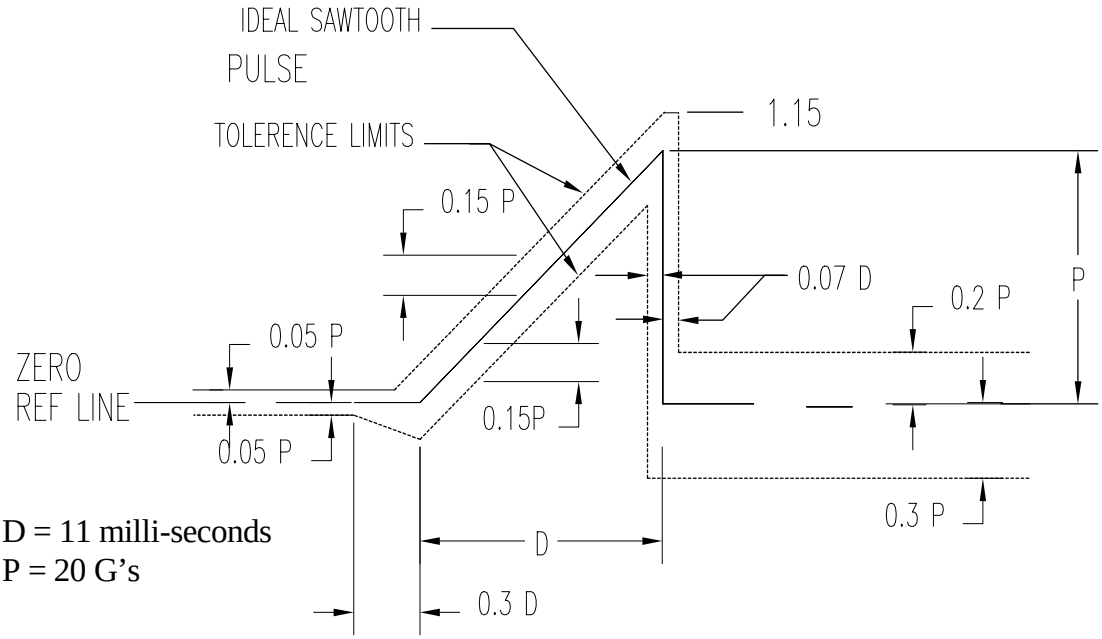


Figure 3. Terminal peak saw tooth shock pulse

4.3.6 Temperature-Shock/Humidity/Altitude (TS/H/A) cycling. The Initiator with protective plugs with o-rings installed shall be submitted to the TS/H/A cycling test outlined in MIL-D-23615, with the following requirements:

a. The Initiator shall be supported in such a way that all areas are exposed to the prescribed atmospheric conditions at all times throughout the test. No Initiator shall be in contact with another Initiator during the cycling schedule shown in Table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

b. Thirty thousand (30,000) feet shall be used in lieu of 70,000 feet for the altitude test.

c. This schedule shall be followed for a total of four (4) weeks (28 days) except that on the second and fourth weekend the soak time shall be from 1200 on Friday until 0800 on Monday at a temperature of 160°F at 95% RH. There are no interim withdraws.

d. Failure of any Initiator to comply with the requirements of 3.5.3 shall be cause for rejection of the lot and/or first article.

Table VI. Temperature shock/humidity/altitude cycling schedule

Monday	0800	Place Initiators in chamber at 70°F at 50% relative humidity (RH).
	1200	Raise chamber temperature to 160°F and an RH of 95%. The chamber shall reach 160°F no later than 1300.
	1600	Remove the Initiator's from above chamber and immediately place in a chamber maintained at -65°F at a pressure altitude of 30,000 feet (4.36 psi)
Tuesday	0800	Remove Initiator's from chamber and immediately place in chamber maintained at 70°F at 50% RH.
	1200	Remove the Initiator's from above chamber and immediately place in a chamber maintained at -65°F at a pressure altitude of 30,000 feet (4.36 psi)
	1600	Remove Initiator's from above chamber and immediately place in a chamber maintained at 160°F at 95% RH.
Wednesday	0800	Reduce chamber temperature to 70°F and RH to 50%. The chamber temperature shall reach 70°F at 50% RH no later than 0900.
	1200	Raise chamber temperature to 160°F and an RH of 95%. The chamber shall reach 160°F no later than 1300.
	1600	Remove the Initiator's from above chamber and immediately place in a chamber maintained at -65°F at a pressure altitude of 30,000 feet (4.36 psi)
Thursday	0800	Remove Initiator's from chamber and immediately place in chamber maintained at 70°F at 50% RH
	1200	Remove the Initiator's from above chamber and immediately place in a chamber maintained at -65°F at a pressure altitude of 30,000 feet (4.36 psi)
	1600	Remove Initiator's from above chamber and immediately place in a chamber maintained at 160°F at 95% RH.
Friday	0800	Reduce chamber temperature to 70°F and RH to 50%. The chamber temperature shall reach 70°F at 50% RH no later than 0900.
	1200	Raise chamber temperature to 160°F and an RH of 95%. The chamber shall reach 160°F no later than 1300.
	1600	Remove the Initiator's from above chamber and immediately place in a chamber maintained at -65°F at standard ambient pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

4.3.7 Six-foot drop. The Initiator, with protective shipping caps removed, shall be submitted to the drop test outlined in MIL-D-23615 with the following requirements:

a. The Initiator shall be dropped from a height of 6 feet +3/-0 inches onto a 2-inch thick steel plate supported be reinforced concrete. One Initiator shall be used for each drop orientation. All impact orientations are given in figure 1.

b. After each Initiator is dropped, a visual inspection shall occur to document any external damage that occurred and to verify non-functioning of the Initiator.

c. If it is determined that the damage sustained by any unit caused it to be non-functional all testing shall be stopped.

d. Failure of any Initiator to comply with the requirements of 3.5.4 shall be cause for rejection of the lot and/or first article.

4.3.8 Functional performance. Sample Initiators for the functional performance test firings shall be conditioned for not less than 4 hours and no more than 24 hours at the specified temperature. The Initiator shall be removed from the conditioning chamber and fired in the appropriate test fixture, figure 5, within 5 minutes. If any Initiator is not fired within the 5 minute time period after removal, it shall be reconditioned at the specified temperature for an additional 2 hours and then tested. The Initiator shall meet the performance requirements of 3.5.5.1 through 3.5.5.4.

4.3.8.1 Arming Force. The Initiator shall arm with an applied force of 6 to 15 lbs. between the temperature range of –65°F and +200°F. The Initiator shall meet the performance requirements of 3.5.5.1.

4.3.8.2 Reset. The handle shall be capable of being reset prior to its being extracted from the housing assembly. Once activated the Initiator shall not be capable of being reset. The Initiator shall meet the performance requirements of 3.5.5.2.

4.3.8.3 Lanyard playout. The lanyard shall freely unwind its complete length without any seizures. The Initiator shall meet the performance requirements of 3.5.5.3.

4.3.8.4 Actuation Force. The Initiator shall fire with an applied force between 20 to 35 lbs. across the operational temperature range. The Initiator shall meet the performance requirements of 3.5.5.4.

4.3.9 Test Failure. If a test failure is attributable to an assigned cause, excluding the Initiator, the test shall be declared a no-test and repeated.

4.4 Acceptance criteria. The Initiator shall meet the requirements of 3.5 when tested as specified in 4.3.3 through 4.3.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

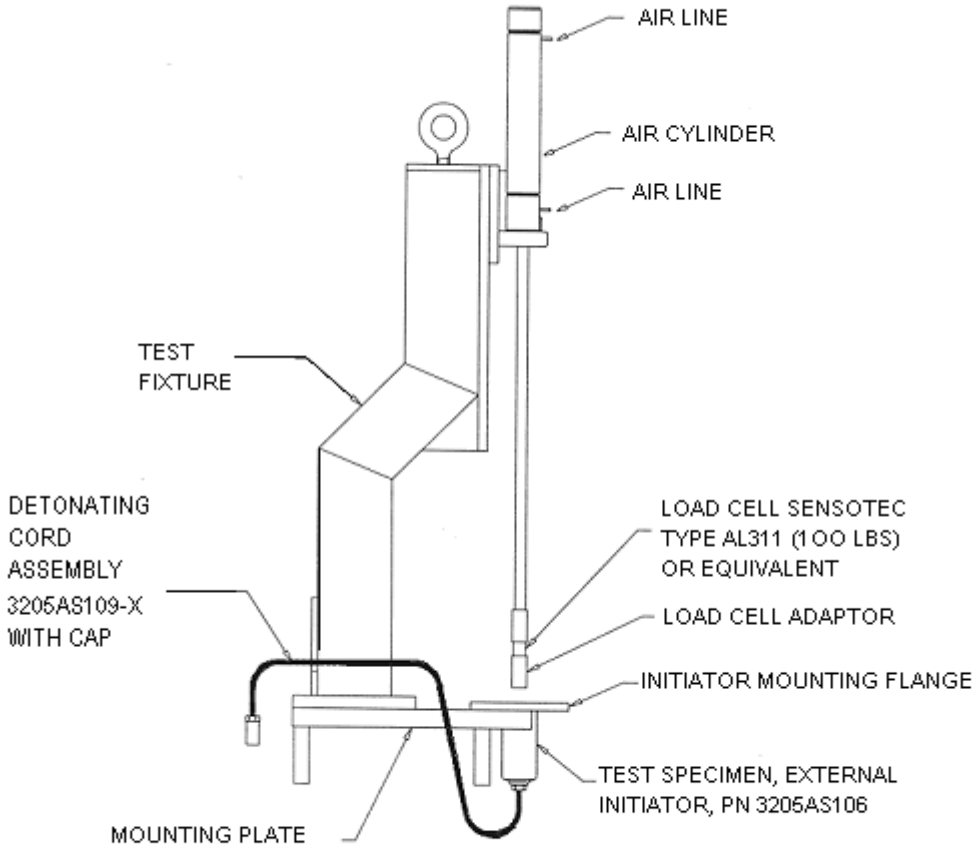


Figure. 4. Functional Test Firing Setup (TN 18751-1)

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of the Initiator is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points packaging activity within the Military Department or Defense Activity, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department or Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that maybe helpful but is not mandatory.)

6.1 Intended Use. These Initiators are components of the Emergency Egress Hatch Removal Systems installed in the MV-22, CV-22 and HV-22 variant aircraft. They are the mechanical firing mechanisms used to initiate the explosive severance component of the system from outside the aircraft by emergency ground personnel. As the V-22 Aircraft is designed for the military there is no civilian application for the JAU-72A/A Initiator.

6.2 Acquisition Requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1, 2.2.2 and 2.3).

c. Whether a first article inspection is required and. if so, specify the test activity (see 3.1 and 4.2.1).

d. Markings if other than as specified.

e. If bar coding is not required on outer container.

f. Inspection conditions if other than specified in 4.2.

g. Production lot size (quantity) and test facility (see 4.2.3.1).

h. Configuration of the Initiator required (see 2.2.2).

6.3 First Article. When a first article inspection is required, the contracting officer should provide specific guidance to bidders whether the item(s) should be a pre-production sample, a first article sample, a first production item, a sample selected from the first production items, standard production item from the contractor's current inventory (see 3.1) and the number of items to be tested as specified in 4.2.1. The contracting officer should also include specific instructions in acquisition documents of the first articles. Invitation(s) for bid(s) should provide that the U.S. Government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the U. S. Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior U.S. Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.

6.4.1 Flight critical part. A part, the single failure of which, during any operating condition, could cause the loss of aircraft or one of its major components, loss of control, or which may cause significant personnel injury, including during flight.

6.5 Subject term (key word) listing.

Detonating Cord Assembly
Initiator, Cartridge Actuated

Preparing activity
Navy - OS
(Project 1377-0219)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:08Z
Check the source to verify that this is the current version before use.