INCH-POUND
MIL-DTL-32182
January 12, 2005

DETAIL SPECIFICATION

COAT, OPERATIONAL DRESS UNIFORM (COAST GUARD)

This document is approved for use by authorized personnel of the United States Coast Guard.

1. SCOPE

1.1 Scope. This document covers the requirements for single-breasted coats.

1.2 Classification. The coat will be of one type in the following sizes as specified (see 6.2).

TABLE I. Schedule of sizes

XX-SHORT	X-SHORT	SHORT	REGULAR	LONG	X-LONG	XX-LONG
-------	32	32	32	32	-------	-------
-------	-------	------	33	-------	-------	-------
34	34	34	34	34	34	-------
36	36	35	35	35	-------	--------
38	38	36	36	36	36	--------
40	40	37	37	37	-------	-------
-------	42	38	38	38	38	38
-------	44	39	39	39	39	-------
-------	-------	40	40	40	40	40
-------	-------	41	41	41	41	-------
-------	-------	42	42	42	42	42
-------	-------	43	43	43	43	-------
-------	-------	44	44	44	44	44
-------	-------	-------	45	45	45	-------
-------	-------	46	46	46	-------	-------
-------	-------	-------	47	47	-------	-------

Comments, suggestions, or questions on this document should be addressed to the Defense Supply Center Philadelphia, DSCP-CRFD, 700 Robbins Avenue, Philadelphia, PA 19111, or e-mailed to Elizabeth.Gladstone@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database at http://assist.daps.dla.mil.

AMSC N/A FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Schedule of sizes, cont.

XX-SHORT	X-SHORT	SHORT	REGULAR	LONG	X-LONG	XX-LONG
-------	-------	-------	48	48	-------	-------
-------	-------	-------	50	50	-------	50
-------	-------	-------	52	52	-------	52
-------	-------	-------	54	54	-------	-------
-------	-------	-------	-------	56	-------	-------
-------	-------	-------	-------	58	-------	-------
-------	-------	-------	-------	60	-------	-------

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4 or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements cited in sections 3, 4 or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

COMMERCIAL ITEM DESCRIPTION

A-A-55126 Fastener, Tapes, Hook and Loop, Synthetic

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-C-44436 Cloth, Camouflage Pattern, Wind Resistant Poplin, Nylon/Cotton Blend

(Copies of these documents are available online at http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building #4, Section D, Philadelphia, PA 19111-5094.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract. (See 6.2).

ASTM INTERNATIONAL

ASTM D-2256 Tensile Properties of Yarns by the Single-Strand Method
ASTM D-6193 Standard Practice for Stitches and Seams

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

(Copies of these documents are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or from www.astm.org.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

AATCC 61 Colorfastness to Laundering, Home and Commercial: Accelerated
AATCC 136 Bond Strength of Bonded and Laminated Fabrics

(Copies of these documents are available from the American Association of Textile Chemists and Colorists, P.O. Box 12215, Triangle Park NC 27709-2215 or from www.aatcc.org. Phone number (919) 549-8141.)

ANSI/ASQC Z1.4 Sampling Procedures and Tables for Inspection of Attributes

(Copies of these documents are available the American National Standards Institute, 1430 Broadway, New York, NY 10018-3308 or from www.ansi.org.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specified exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.2.

3.2 Recycled recovered or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Design and construction. The coat is single-breasted with a collar, concealed button front closure, 2 breast pockets with flaps, and there shall be no exposed drill holes. The left breast pocket has a concealed pencil pocket. The coat has long sleeves with reinforced elbows, adjustable cuffs at wrist, a suppressed waist and a straight-cut bottom (reference figure 1).

3.4 Basic material. The basic material shall be nylon/cotton ripstop dyed USCG Blue 3362, conforming to the physical properties for Class 1 of MIL-C-44436. The coat shall show no toxicity when used as intended and when tested as specified in 4.4.

3.5 Seconds/mill seconds. Seconds/mill seconds cloth shall be dyed in conformance with the specified basic material and shall meet the physical, mechanical, and dimensional requirements of the respective finished fabric. Seconds shall be cloth which has been rejected for defects pertaining to color only, as cited in the specified basic material requirements. Mill seconds shall be cloth which has been rejected for visual defects only and has been dyed to match specified basic material. (See 3.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

3.6 Components

3.6.1 Interlining. To improve abrasion resistance and appearance of garment, the collar and pocket flaps shall be interlined. The interlining shall have the same life expectancy of the coat itself. After attaching to the basic cloth, it shall meet an initial directional bond strength of 32 ounces minimum per inch, and after 3 launderings, it shall meet a directional bond strength of 24 ounces minimum per inch when tested as specified in 4.4.1.

3.6.2 Thread and gimp.


3.6.2.1 Thread. Thread for needle and bobbin (looper) shall be cotton or polyester-covered, polyester core, commercial size Ticket No. 50 (Tex size 36 to 50) with a minimum breaking strength of 3.2 pounds when tested as specified in 4.4.2. As an alternate, Ticket No. 70 (Tex size 31 to 35) with a breaking strength of 2.6 pounds when tested as specified in 4.4.2 may be used as the bobbin (looper) thread. The color shall be black.

3.6.2.2 Gimp. Thread for reinforcement of buttonholes shall be cotton, commercial size Ticket No. 8 (Tex size 210) with a minimum breaking strength of 6.5 pounds when tested as specified in 4.4.2. The color shall be black.

3.6.2.3 Colorfastness. All thread used shall be non-staining and show good colorfastness to laundering when tested as specified in 4.4.3.

3.6.3 Fastener tape (hook & loop). Fastener tape for the coat shall be 1 inch by 1 inch square. Fastener tape shall conform to type I class 1 of A-A-55126 except that it shall be extruded hook, nylon base, low profile “wash & wear” YKK Style HDPE (SA200) for the hook and YKK Style NYL-LP for the loop or equal commercial tape. It shall not pick up lint after 5 home launderings when tested as specified in AATCC 135 using a high degree of cotton ballast. The color of the hook and loop shall be black. Sew two one inch squares of loop fastener tape on breast pocket flap, through pocket as per marks on pattern. Stitch on all four sides 1/8 inch from edges. Square tack must overlap three starting stitches at the end of square cycle. Sew two one inch squares of loop fastener tape on each breast pocket and pocket facings per marks on patterns. Stitch on all four sides 1/8 inch from edges. Square tack must overlap three starting stitches or back tack three stitches at the end of the square tack cycle. Stitch type shall be 301, seam stitching type shall be LSbj-1, stitches per inch 10-14, thread needle shall be 50, and bobbin 50.

3.6.4 Buttons. The buttons shall be dull finish, 4-hole, 30 ligne, and shall be in accordance with the following button style:



(Cross section of button)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

The color of the button shall be a good match to Blue 3362. The buttons shall not exhibit chalking. The buttons shall show a minimum compressive strength of 1800 lb when tested as specified in 4.4.4. When attached to the coat, the button and thread shall withstand a pull test of 40 lb. (min) when tested as specified in 4.4.5.

3.7 Labels. Each coat shall have a size label, an identification label, and a care label. The identification and care labels may be combined. The ground color for all labels shall be white with black lettering, and the inscription shall have a minimum font size of 10 points. The inscription legibility, label, and label attachment shall last the expected life of the coat.

3.7.1 Identification label. The identification label shall contain the item description, contract number, fiber content information and contractor's name.

3.7.2 Care label. The care label shall include the following information:

Coat, Operational Dress USCG Blue 3362

1. Wear inside of trousers.

2. Machine washing. Use Permanent Press Cycle. Wash in warm water and mild detergent.

3. Hand washing. Wash in warm water using mild detergent. DO NOT WRING OR TWIST. Rinse in clean warm water.

4. DO NOT USE CHLORINE BLEACH OR STARCH.

5. Dry at low heat (Do not exceed 130°F). After drying, tumble at room temperature for 10 minutes. Remove immediately from dryer. To drip dry, remove from water and place on rust-proof hanger.

DO NOT REMOVE THIS LABEL

3.7.3 Size label. The size label shall contain the following information:

TABLE II. Size Labels

ODD SIZES

Size 35 Short	Size 37 Short	Size 39 Short
Height: 55 to 59 in.	Height: 55 to 59 in.	Height: 55 to 59 in.
Chest: 35 in.	Chest: 37 in.	Chest: 39 in.
Stock No.	Stock No.	Stock No.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

Size 41 Short
Height: 55 to 59 in.
Chest: 41 in.
Stock No.

Size: 43 Short
Height: 55 to 59 in.
Chest: 43 in.
Stock No.

Size 33 Regular
Height: 59-63 in.
Chest: 33 in.
Stock No.

Size 35 Regular
Height: 59-63 in.
Chest: 35 in.
Stock No.

Size 37 Regular
Height: 59-63 in.
Chest: 37 in.
Stock No.

Size 39 Regular
Height: 59-63 in.
Chest: 39 in.
Stock No.

Size 41 Regular
Height: 59-63 in.
Chest: 41 in.
Stock No.

Size 43 Regular
Height: 59-63 in.
Chest: 43 in.
Stock No.

Size 45 Regular
Height: 59-63 in.
Chest: 45 in.
Stock No.

Size 47 Regular
Height: 59-63 in.
Chest: 47 in.
Stock No.

Size 35 Long
Height: 63-67 in.
Chest: 35 in.
Stock No.

Size 37 Long
Height: 63-67 in.
Chest: 37 in.
Stock No.

Size 39 Long
Height: 63-67 in.
Chest: 39 in.
Stock No.

Size 41 Long
Height: 63-67 in.
Chest: 41 in.
Stock No.

Size 43 Long
Height: 63-67 in.
Chest: 43 in.
Stock No.

Size 45 Long
Height: 63-67 in.
Chest: 45 in.
Stock No.

Size 47 Long
Height: 63-67 in.
Chest: 47 in.
Stock No.

Size 39 X-Long
Height: 67-71 in.
Chest: 39 in.
Stock No.

Size 41 X-Long
Height: 67-71 in.
Chest: 41 in.
Stock No.

Size 43 X-Long
Height: 67-71 in.
Chest: 43 in.
Stock No.

Size 45 X-Long
Height: 67-71 in.
Chest: 45 in.
Stock No.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

EVEN SIZES

Size 32 -X-Short Height: 59 to 63 in. Chest: Up to 32 in. Stock No.	Size 32 -Short Height: 63 to 67 in. Chest: Up to 32 in. Stock No.	Size 32 - Regular Height: 67 to 71 in. Chest: Up to 32 in. Stock No.
Size 32 -Long Height: 71 to 75 in. Chest: Up to 32 in. Stock No.	Size 34-XX-Short Height: 55 to 59 in. Chest: 34 in. Stock No.	Size 34-X-Short Height: 59 to 63 in. Chest: 34 in. Stock No.
Size 34-Short Height: 63 to 67 in. Chest: 34 in. Stock No.	Size 34-Regular Height: 67 to 71 in. Chest: 34 in. Stock No.	Size 34-Long Height: 71 to 75 in. Chest: 34 in. Stock No.
Size 34-X-Long Height: 75 to 79 in. Chest: 34 in. Stock No.	Size 36 - XX-Short Height: 55 to 59 in. Chest: 36 in. Stock No.	Size 36 - X-Short Height: 59 to 63 in. Chest: 36 in. Stock No.
Size 36 - Short Height: 63 to 67 in. Chest: 36 in. Stock No.	Size 36 - Regular Height: 67 to 71 in. Chest: 36 in. Stock No.	Size 36 - Long Height: 71 to 75 in. Chest: 36 in. Stock No.
Size 36 - X-Long Height: 75 to 79 in. Chest: 36 in. Stock No.	Size 38 - XX-Short Height: 55 to 59 in. Chest: 38 in. Stock No.	Size 38 - X-Short Height: 59 to 63 in. Chest: 38 in. Stock No.
Size 38 - Short Height: 63 to 67 in. Chest: 38 in. Stock No.	Size 38 - Regular Height: 67 to 71 in. Chest: 38 in. Stock No.	Size 38 - Long Height: 71 to 75 in. Chest: 38 in. Stock No.
Size 38 - X-Long Height: 75 to 79 in. Chest: 38 in. Stock No.	Size 38 - XX-Long Height: Above 79 in. Chest: 38 in. Stock No.	Size 40 - XX-Short Height: 55 to 59 in. Chest: 40 in. Stock No.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

Size 40 - X-Short Height: 59 to 63 in. Chest: 40 in. Stock No.	Size 40 - Short Height: 63 to 67 in. Chest: 40 in. Stock No.	Size 40 - Regular Height: 67 to 71 in. Chest: 40 in. Stock No.
Size 40 - Long Height: 71 to 75 in. Chest: 40 in. Stock No.	Size 40 - X-Long Height: 75 to 79 in. Chest: 40 in. Stock No.	Size 40 - XX-Long Height: Above 79 in. Chest: 40 in. Stock No.
Size 42 - X-Short Height: 59 to 63 in. Chest: 42 in. Stock No.	Size 42 - Short Height: 63 to 67 in. Chest: 42 in. Stock No.	Size 42 - Regular Height: 67 to 71 in. Chest: 42 in. Stock No.
Size 42 - Long Height: 71 to 75 in. Chest: 42 in. Stock No.	Size 42 - X-Long Height: 75 to 79 in. Chest: 42 in. Stock No.	Size 42 - XX-Long Height: Above 79 in. Chest: 42 in. Stock No.
Size 44 - X-Short Height: 59 to 63 in. Chest: 44 in. Stock No.	Size 44 - Short Height: 63 to 67 in. Chest: 44 in. Stock No.	Size 44 - Regular Height: 67 to 71 in. Chest: 44 in. Stock No.
Size 44 - Long Height: 71 to 75 in. Chest: 44 in. Stock No.	Size 44 - X-Long Height: 75 to 79 in. Chest: 44 in. Stock No.	Size 44 - XX-Long Height: Above 79 in. Chest: 44 in. Stock No.
Size 46 - Short Height: 63 to 67 in. Chest: 46 in. Stock No.	Size 46 - Regular Height: 67 to 71 in. Chest: 46 in. Stock No.	Size 46 - Long Height: 71 to 75 in. Chest: 46 in. Stock No.

Size 48 - Short Height: 63 to 67 in. Chest: 48 in. Stock No.	Size 48 - Regular Height: 67 to 71 in. Chest: 48 in. Stock No.	Size 48 - Long Height: 71 to 75 in. Chest: 48 in. Stock No.	Size 50 - Regular Height: 67 to 71 in. Chest: 50 in. Stock No.
Size 50 - Long Height: 71 to 75 in. Chest: 50 in. Stock No.	Size 50 - XX-Long Height: Above 79 in. Chest: 50 in. Stock No.	Size 52 - Regular Height: 67 to 71 in. Chest: 52 in. Stock No.	Size 52 - Long Height: 71 to 75 in. Chest: 52 in. Stock No.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

Size 52 - XX-Long	Size 54 - Regular	Size 54 - Long	Size 56 - Long
Height: Above 79 in.	Height: 67 to 71 in.	Height: 71to75 in.	Height: 71 to 75 in.
Chest: 52 in.	Chest: 54 in.	Chest: 54 in.	Chest: 56 in.
Stock No.	Stock No.	Stock No.	Stock No.

Size 58 - Long	Size 60 - Long
Height: 71 to 75 in	Height: 71 to 75 in.
Chest: 58 in.	Chest: 60 in.
Stock No.	Stock No.

3.7.4 Label placement. The labels shall be sewn on all four sides attached to the coat and positioned as follows:

3.7.4.1 Size label. Size label shall be positioned on the inside center collar (± 1 inch off center), for visibility when folded.

3.7.4.2 Combination Care/Identification label. Combination label shall be sewn on backside of the left chest pocket (as worn) containing the information listed in 3.7.2. No indication of label application shall show on the outside of the coat. (See figure 2)

3.8 Seaming. Seaming shall be consistent, exhibit a uniform appearance and conform to the ASTM D-6193 stitch and seam types listed below. The backside of all seams (inside garment) shall be flat with no protruding seam allowance to create irritation or discomfort. The seams shall be sewn with 10 - 14 stitches per inch for all outside visible stitching. Overedge or pre-hemming shall be 6 - 10 stitches per inch. To maintain durability and functionality, bartacks 3/8 to 5/8 inch in length with approximately 27 stitches are required at the specified reinforcement points shown in Figure 6. Buttonholes shall be eyelet end, tapered bar, 3/4 to 7/8 inch length with 52 - 56 stitches per inch. The buttonhole purling shall be between tab and flap plies and front facing and front plies, or on the outside of the coat. All material edges shall be clean finished: edges shall be either turned-in, turned-under, or serged.

TABLE III. Seam & Stitch types

Seam Placement	**Seam type**	**Gage**	**Stitch Type**
Side seams, back arm seams, set in sleeves, shoulder seams	LSc-2	3/16 to 9/32 inch gage	301 or 401
Top Stitching of pocket flaps, collar, left front fly, cuff, front edges	OSf-1	3/6 to 1/4 inch from the edge	301
Top Stitching of pockets	OSf-1	1/16 to 1/8 inch from the edge	301
Attachment of pockets	LSd-1	1/16 to 1/8 inch from the edge	301
Attachment of patches and flaps	LSd-1 or LSd-2	two rows 3/16 to1/4 inch apart	301
Bottom hemming	Efb-1	1/16 to 1/8 inch from edge, 5/8 + 1/8 inch wide hem	301
Attachment of flaps	LSbk-3	3/16 inch setting with 1/4	301

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

Seam Placement	Seam type	Gage	Stitch Type
		inch gage topstitching or 1/16 inch with 1/4 inch gage	
Setting cuff	LSd-1	1/8 to 3/16 inch from the edge	301
Setting collar	Ssa-1 or Lsb-1	1/16 to 1/8 inch from the edge	301

3.9 List of pattern parts. Standard patterns provide a seam allowance of 3/8 inch for single needle seams and 1/2 inch for double needle seams. Buttonholes, pockets and pocket flaps shall be located in accordance with marks on patterns. The pattern list in Table IV is provided to ensure that the pattern set provided is complete.

TABLE IV. List of pattern parts

Material	Pattern Part (Abbreviation)	Quantity to Cut
Basic Material	BACK	1
Basic Material	FRONT	2
Basic Material	TOP_SLEEVE	2
Basic Material	UND_SLEEVE	2
Basic Material	COLLAR	2
Basic Material	LFT_FRT_FLY	1
Basic Material	CUFF	2
Basic Material	ELBOW_PATCH	2
Basic Material	CUFF_TAB	2
Basic Material	PEN_POCKET	1
Basic Material	BRST_POCKET	2
Basic Material	BRS_PKT_FLP	2
Fusible, Non-Woven	Collar_Int	1
Fusible, Non-Woven	BR_PK_FL_Int	2

3.10 Parts cut from ground shade/printed seconds/mill seconds. Table V lists the pattern parts which may be cut from mill seconds (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

TABLE V. List of pattern parts that may be cut from seconds.

Pattern Abbreviation	Nomenclature
PENCIL PCKT	Pencil pocket
LFT-FRT-FLY	Left front fly

3.11 Configuration. The following specifics are needed to provide uniform appearance, comfort, and durability in garrison, combat, and operations other than war. End item garment construction and appearance shall conform to figures l through 6 and the finished dimensions (see 4.4.4.1) to maintain configuration and compliance to end item performance tests (see 4.4).

3.12 Use of automated apparel equipment. Minor modifications to patterns to accommodate automation or to the methods used to the finished dimensions are acceptable.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.2)
2. Quality conformance inspection (see 4.3)

4.2 First article inspection. The first article, submitted in accordance with 3.1, shall be inspected for compliance with design, configuration, workmanship and dimensional requirements. The presence of excessive defects, as defined by contract, (see 4.4.4) or failure to pass any test shall be cause for rejection of the first article.

4.3 Quality conformance inspection. Sampling for inspection shall be performed in accordance with ANZI/ASQC Z1.4, as defined by contract, except where otherwise indicated.

4.4 Component and end item inspection. In accordance with 4.1, components and end items shall be tested in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable procurement documents. The government reserves the right to inspect all components and end items to determine conformance to requirements.

4.4.1 Bond strength test. The interlining shall meet the requirements stated in 3.6.1 when tested according to AATCC TM 136, paragraph 11.

4.4.2 Breaking strength and elongation test. The thread and gimp shall meet the requirements stated in 3.6.2.1 and 3.6.2.2 when tested according to ASTM D-2256.

4.4.3 Colorfastness test. The thread and gimp shall meet the requirements stated in 3.6.2.3 when tested according to AATCC TM 61, Test 3A (3 cycles).

4.4.4 Compressive strength test. The buttons shall meet the requirements stated in 3.6.4 when tested for compressive strength using an apparatus which permits gradual application of the load either by a manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

or automatic hydraulic mechanism. Buttons shall be placed face down one at a time between flat blocks of steel, and tested to failure. Failure is defined as the first sign of a crack in the button visible to the naked eye (a visible crack in the button will usually be found at the first audible sound of cracking).

4.4.5 Button pull test. The buttons attached to the coat shall meet the requirements stated in 3.6.4 when tested according to ASTM D-5034, except slide the button between the two upper 1 inch grips such that it rests on top of those grips that are separated by at least 3/8 inch. Using manually adjusted grips, place the button attachment stitching in the center of the bottom grips then lower the bottom grips such that they grab the basic material directly beneath the button stitching, not on the stitching itself."

4.4.4 End item visual examination. The coat shall be examined for the defects listed below.

TABLE VI. End item visual defects

EXAMINATION	DEFECT
Material and Workmanship	Component part omitted, distorted, full, tight, or twisted; any part of coat caught in any unrelated stitching, the edge of any component part required to be forced out having folds of more than 1/8 inch Cloth: hole, cut, tear, smash, burn, drill hole, run, thin place, dye streak, color not as specified, misweave, knot or slub affecting appearance or serviceability Seam: puckered, distorted, pleated, wavy, twisted, irregular, open, loose or tight stitch tension, broken or missing thread or stitch, needle chew, visible mend, edge or raised stitching sewn too close to edge, resulting in damage to cloth, seam allowance not as specified raw edge affecting appearance or serviceability Length of fronts uneven by more than 1/4 inch at top or uneven by more than 1/4 inch at bottom when buttoned, front buttons and buttonholes out of alignment, causing bulge or twist on fronts when buttoned Permanent fold, pleat, or crease affecting appearance or serviceability Front pockets and flaps not uniform in size or shape, out of alignment by more than 3/8 inch, front edge not parallel to front of coat by 3/8 inch or more, pleated, twisted, curled or puckered, not stitched as specified, flap not completely covering pocket opening, Hook and loop out of alignment causing bulge or twist on pockets when fastened Collar points: uneven in length by 1/4 inch or more, collar curls, puckers, pleats, or twists Buttonholes: added, not clean cut or securely caught in fabric, not specified type

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

EXAMINATION	DEFECT
	Buttons: missing, broken, defective, not attached as specified, or insecurely sewn. Bartacks or backtacks: missing, insecure, misplaced, not specified size, stitches loose or broken, or not serving intended purpose Fastener tape: missing, defective, incorrect style or color, not attached or sewn as specified. Sleeve: reversed, puckered or pleated; cuffs reversed, uneven in width more than 1/4 inch, poorly shaped, buttons not placed as specified, cuff buttonhole and first sleeve button not aligned, causing bulge or twist on cuff when buttoned Interlining: bubbling, delamination, bleed through, wrinkling, or puckering Any finished measurement not as specified
Shade	Shade variation within a part or between parts Thread or button color not as specified
Cleanness	Spot, stain, excessive thread ends not trimmed or removed Odor, affecting appearance or serviceability
Labels	Labels: omitted, incorrect, illegible, not attached where specified Bar code/UPC code omitted, not readable by scanner; human-readable interpretation (HRI) omitted or illegible Bar code/UPC code not visible on folded, packaged item, bar code attachment causes damage to the item
Packaging	Any coats not packaged in accordance with contract or purchase order

4.4.4.1 Finished dimensions. The coat shall conform to the dimensions listed below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

TABLE VII. Finished dimensions

All measurements in inches.

EVEN SIZES

XX-SHORT															
		34	**36**	**38**	**40**										
HALF CHEST ± 3/8 in.		21	22	23	24										
HALF WAIST ± 3/8 in.		18-1/4	19-1/4	20-1/4	21-1/4										
HALF SEAT ± 3/8 in.		20	21	22	23										
CUFF ± ¼ in.		15-7/8	16-1/8	16-3/8	16-5/8										
SLV. LENGTH ± ½ in.		30-1/2	30-1/2	31	31										
BODY LENGTH ± ½ in.		28-1/4	28-1/2	28-3/4	29										
X-SHORT															
	32	**34**	**36**	**38**	**40**	**42**	**44**								
HALF CHEST ± 3/8 in.	20	21	22	23	24	25	26								
HALF WAIST ± 3/8 in.	17-1/4	18-1/4	19-1/4	20-1/4	21-1/4	22-1/4	23-1/4								
HALF SEAT ± 3/8 in.	19	20	21	22	23	24	25								
CUFF ± ¼ in.	15-5/8	15-7/8	16-1/8	16-3/8	16-5/8	16-7/8	17-1/8								
SLV. LENGTH ± ½ in.	31	31-1/2	31-1/2	32	32	32-1/2	32-1/2								
BODY LENGTH ± ½ in.	29	29-1/4	29-1/2	29-3/4	30	30-1/4	30-1/2								
SHORT															
	32	**34**	**36**	**38**	**40**	**42**	**44**	**46**	**48**						
HALF CHEST ± 3/8 in.	20	21	22	23	24	25	26	27	28						
HALF WAIST ± 3/8 in.	17-1/4	18-1/4	19-1/4	20-1/4	21-1/4	22-1/4	23-1/4	24-1/4	25-1/4						
HALF SEAT ± 3/8 in.	19	20	21	22	23	24	25	26	27						
CUFF ± ¼ in.	15-5/8	15-7/8	16-1/8	16-3/8	16-5/8	16-7/8	17-1/8	17-3/8	17-5/8						
SLV. LENGTH ± ½ in.	32	32-1/2	32-1/2	33	33	33-1/2	33-1/2	34	34						
BODY LENGTH ± ½ in.	30	30-1/4	30-1/2	30-3/4	31	31-1/4	31-1/2	31-3/4	32						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

REGULAR															
	32	**34**	**36**	**38**	**40**	**42**	**44**	**46**	**48**	**50**	**52**	**54**			
HALF CHEST ± 3/8 in.	20	21	22	23	24	25	26	27	28	29	30	31			
HALF WAIST ± 3/8 in.	17-1/4	18-1/4	19-1/4	20-1/4	21-1/4	22-1/4	23-1/4	24-1/4	25-1/4	26-1/4	27-1/4	28-1/4			
HALF SEAT ± 3/8 in.	19	20	21	22	23	24	25	26	27	28	29	30			
CUFF ± ¼ in.	15-5/8	15-7/8	16-1/8	16-3/8	16-5/8	16-7/8	17-1/8	17-3/8	17-5/8	17-7/8	18-1/8	18-3/8			
SLV. LENGTH ± ½ in.	33-1/2	34	34	34-1/2	34-1/2	35	35	35-1/2	35-1/2	36	36	36-1/2			
BODY LENGTH ± ½ in.	31-1/2	31-3/4	32	32-1/4	32-1/2	32-3/4	33	33-1/4	33-1/2	33-3/4	34	34-1/4			
LONG															
	32	**34**	**36**	**38**	**40**	**42**	**44**	**46**	**48**	**50**	**52**	**54**	**56**	**58**	**60**
HALF CHEST ± 3/8 in.	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
HALF WAIST ± 3/8 in.	17-1/4	18-1/4	19-1/4	20-1/4	21-1/4	22-1/4	23-1/4	24-1/4	25-1/4	26-1/4	27-1/4	28-1/4	29-1/4	30-1/4	31-1/4
HALF SEAT ± 3/8 in.	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
CUFF ± ¼ in.	15-5/8	15-7/8	16-1/8	16-3/8	16-5/8	16-7/8	17-1/8	17-3/8	17-5/8	17-7/8	18-1/8	18-3/8	18-5/8	18-7/8	19-1/8
SLV. LENGTH ± ½ in.	34-1/2	35	35	35-1/2	35-1/2	36	36	36-1/2	36-1/2	37	37	37-1/2	37-1/2	38	38
BODY LENGTH ± ½ in.	33	33-1/4	33-1/2	33-3/4	34	34-1/4	34-1/2	34-3/4	35	35-1/4	35-1/2	35-3/4	36	36-1/4	36-1/2
X-LONG															
		34	**36**	**38**	**40**	**42**	**44**								
HALF CHEST ± 3/8 in.		21	22	23	24	25	26								
HALF WAIST ± 3/8 in.		18-1/4	19-1/4	20-1/4	21-1/4	22-1/4	23-1/4								
HALF SEAT ± 3/8 in.		20	21	22	23	24	25								
CUFF ± ¼ in.		15-7/8	16-1/8	16-3/8	16-5/8	16-7/8	17-1/8								
SLV. LENGTH ± ½ in.		36	36	36-1/2	36-1/2	37	37								
BODY LENGTH ± ½ in.		34-3/4	35	35-1/4	35-1/2	35-3/4	36								

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

XX-LONG															
				38	**40**	**42**	**44**			**50**	**52**				
HALF CHEST ± 3/8 in.				23	24	25	26			29	30				
HALF WAIST ± 3/8 in.				20-1/4	21-1/4	22-1/4	23-1/4			26-1/4	27-1/4				
HALF SEAT ± 3/8 in.				22	23	24	25			28	29				
CUFF ± ¼ in.				16-3/8	16-5/8	16-7/8	17-1/8			17-7/8	18-1/8				
SLV. LENGTH ± ½ in.				37-1/2	37-1/2	38	38			39	39				
BODY LENGTH ± ½ in.				36-3/4	37	37-1/4	37-1/2			38-1/4	38-1/2				

ODD SIZES

SHORT															
		35	**37**	**39**	**41**	**43**									
HALF CHEST ± 3/8 in.		21	22	23	24	25									
HALF WAIST ± 3/8 in.		18	19	20	21	22									
HALF SEAT ± 3/8 in.		22	23	24	25	26									
CUFF ± ¼ in.		15-1/8	15-3/8	15-5/8	15-7/8	16-1/8									
SLV. LENGTH ± ½ in.		29	29	29	29	29									
BODY LENGTH ± ½ in.		28-1/4	28-1/2	28-3/4	29	29-1/4									
REGULAR															
	33	**35**	**37**	**39**	**41**	**43**	**45**	**47**							
HALF CHEST ± 3/8 in.	20	21	22	23	24	25	26	27							
HALF WAIST ± 3/8 in.	17	18	19	20	21	22	23	24							
HALF SEAT ± 3/8 in.	21	22	23	24	25	26	27	28							
CUFF ± ¼ in.	14-7/8	15-1/8	15-3/8	15-5/8	15-7/8	16-1/8	16-3/8	16-5/8							
SLV. LENGTH ± ½ in.	31	31	31	31	31	31	31	31							
BODY LENGTH ± ½ in.	29	29-1/4	29-1/2	29-3/4	30	30-1/4	30-1/2	30-3/4							

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

LONG															
		35	**37**	**39**	**41**	**43**	**45**	**47**							
HALF CHEST ± 3/8 in.		21	22	23	24	25	26	27							
HALF WAIST ± 3/8 in.		18	19	20	21	22	23	24							
HALF SEAT ± 3/8 in.		22	23	24	25	26	27	28							
CUFF ± ¼ in.		15-1/8	15-3/8	15-5/8	15-7/8	16-1/8	16-3/8	16-5/8							
SLV. LENGTH ± ½ in.		33	33	33	33	33	33	33							
BODY LENGTH ± ½ in.		30-1/4	30-1/2	30-3/4	31	31-1/4	31-1/2	31-3/4							
X-LONG															
				39	**41**	**43**	**45**								
HALF CHEST ± 3/8 in.				23	24	25	26								
HALF WAIST ± 3/8 in.				20	21	22	23								
HALF SEAT ± 3/8 in.				24	25	26	27								
CUFF ± ¼ in.				15-5/8	15-7/8	16-1/8	16-3/8								
SLV. LENGTH ± ½ in.				35	35	35	35								
BODY LENGTH ± ½ in.				31-3/4	32	32-1/4	32-1/2								

METHOD OF MEASURING - The coat shall be placed flat upon a table and measured as follows:

Half Chest - With coat buttoned, measure from folded edge to folded edge across chest in line with pit of armhole.

Half Waist - With coat buttoned, measure from folded edge to folded edge across coat waist at narrowest depression.

Half Seat - With coat buttoned, measure from folded edge to folded edge across coat 2 inches up from bottom.

Cuff - With sleeve laid flat, measure from folded edge to folded edge doubled.

Sleeve Length - Measure from center of back at undercollar setting seam, across shoulders and down sleeves to bottom edge of cuff.

Body length - Measure from center of back from undercollar setting seam to bottom edge of coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

TABLE VIII. Collar & pocket measurements

All measurements in inches.

Finished Part	All sizes	Tolerance
Collar	2-1/2	± 1/8 inch
Pockets	5-1/2 wide; 6-1/2 long	± 1/8 inch

METHOD OF MEASURING - The coat shall be placed flat upon a table and measured as follows:

Collar - Measure from collar seam along edge of collar to collar point.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or purchase order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the inventory Control Point's packaging activity within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The coats are for wear by authorized personnel of the United States Coast Guard.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this document.

b. Types, classes and sizes required (see 1.2).

c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2 and 2.3).

d. When first article sample is required (see 3.1, 4.2 and 6.3).

e. Packaging requirements (see 5.1).

6.3 First article. When a first article is required, it will be inspected and approved under the appropriate provisions of FAR 52.2094. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

contracting officer should include specific instructions in all acquisitions documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Subject term (key word) listing.
Coat
Clothing
Operational Dress Uniform (ODU)

MILITARY INTERESTS:

Custodians:
DLA - CT


Preparing activity:
DLA - CT

Review activities:
Coast Guard - CG


Project No. 8415-0283

The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

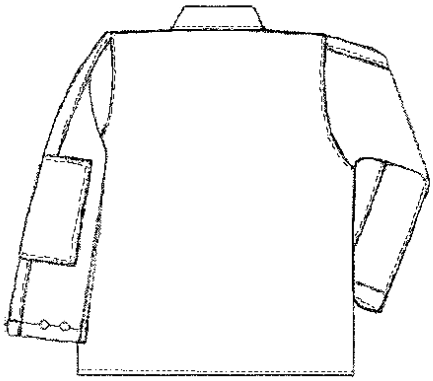

Back View

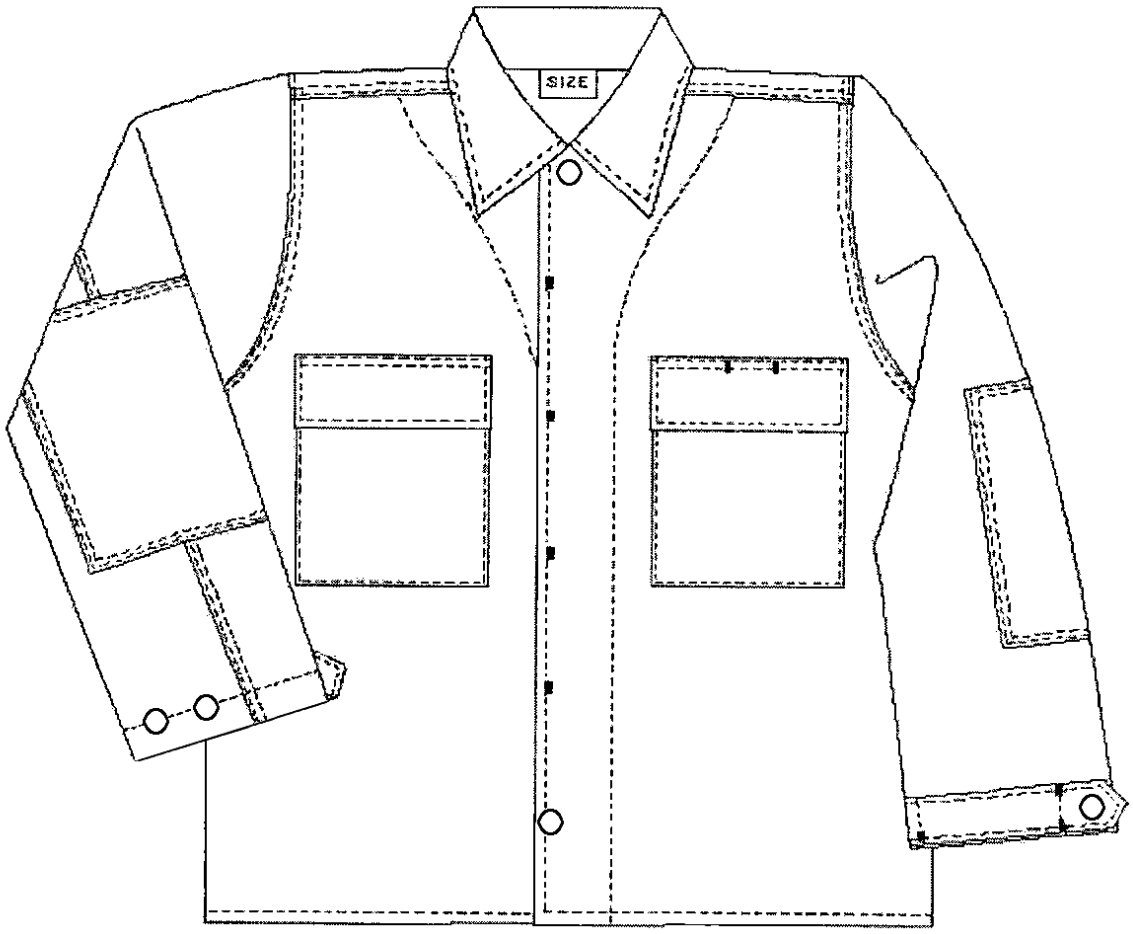

Front View

Figure 1. Operational Dress Uniform C.G.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

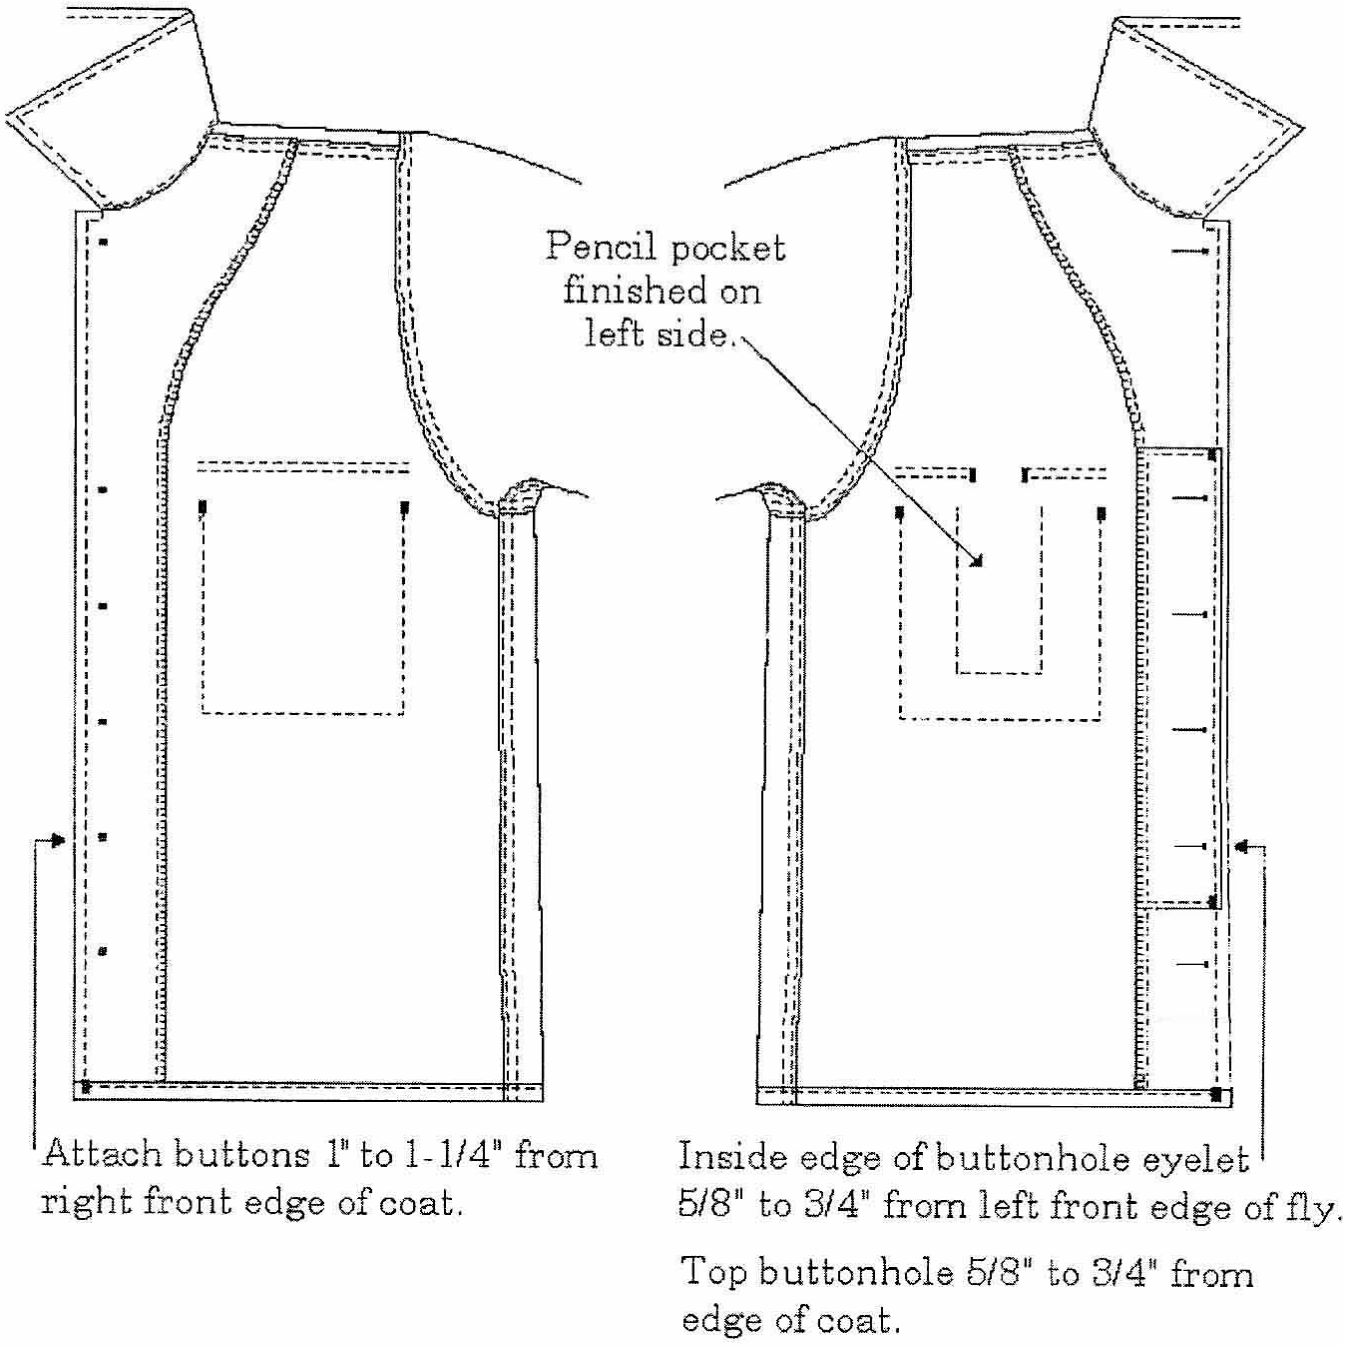


Figure 2. Right and Left Front Facings, Inside View

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

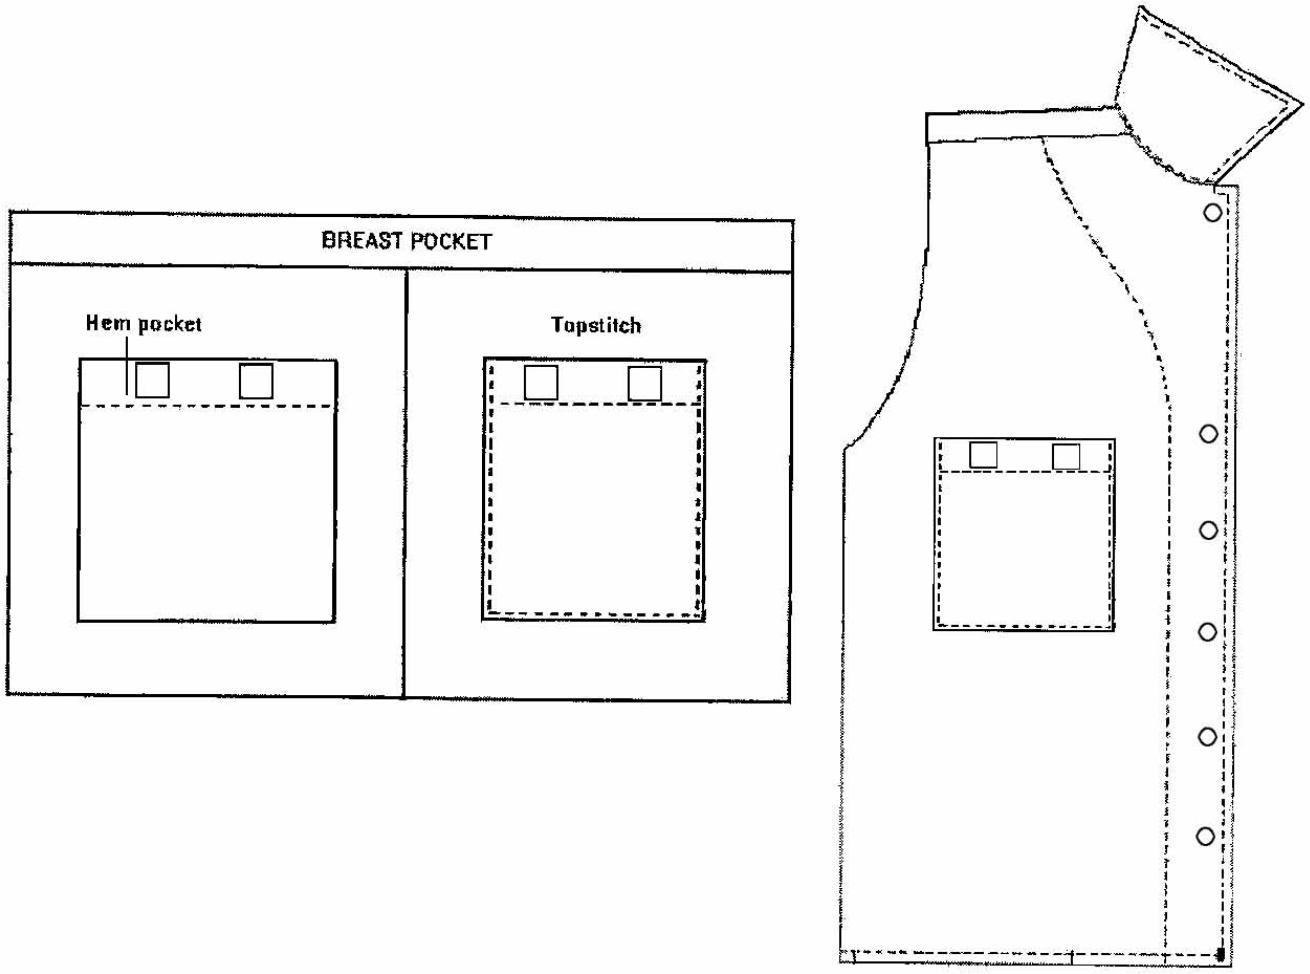


Figure 3. Pocket Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

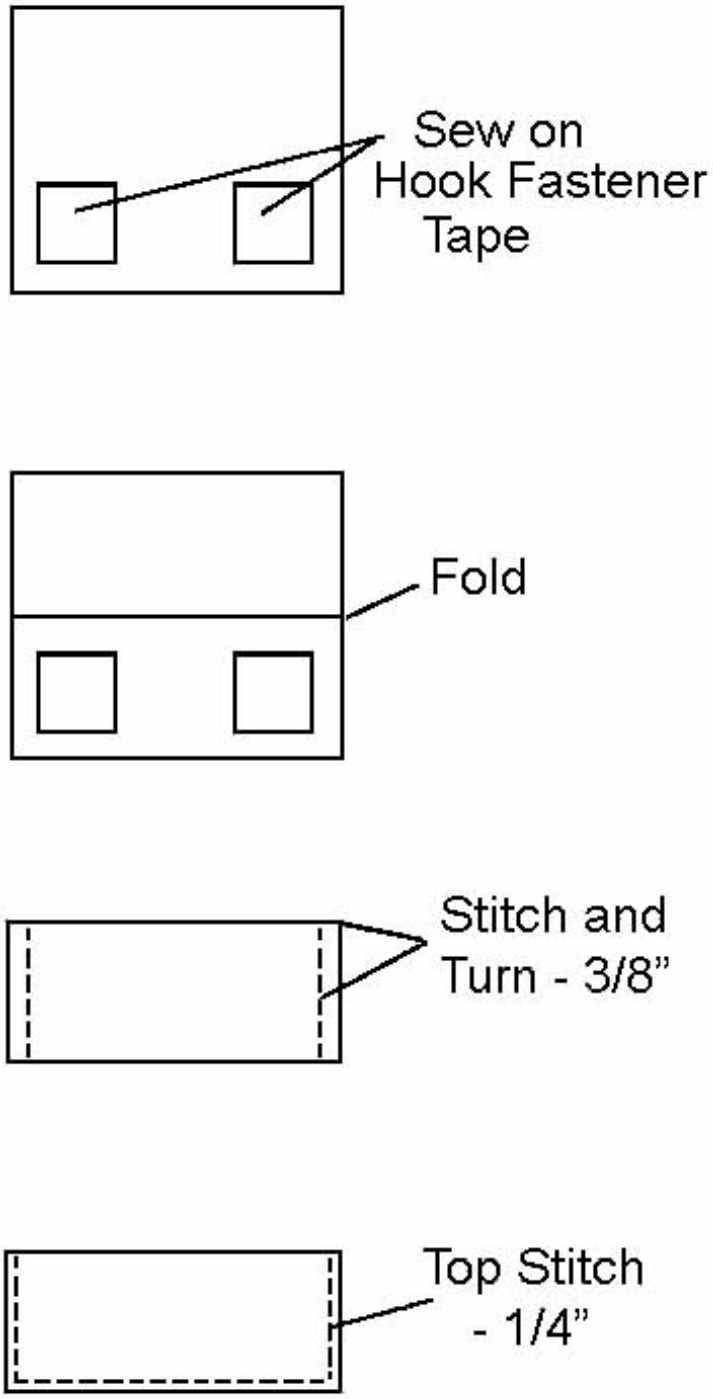


Figure 4. Pocket Flap Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

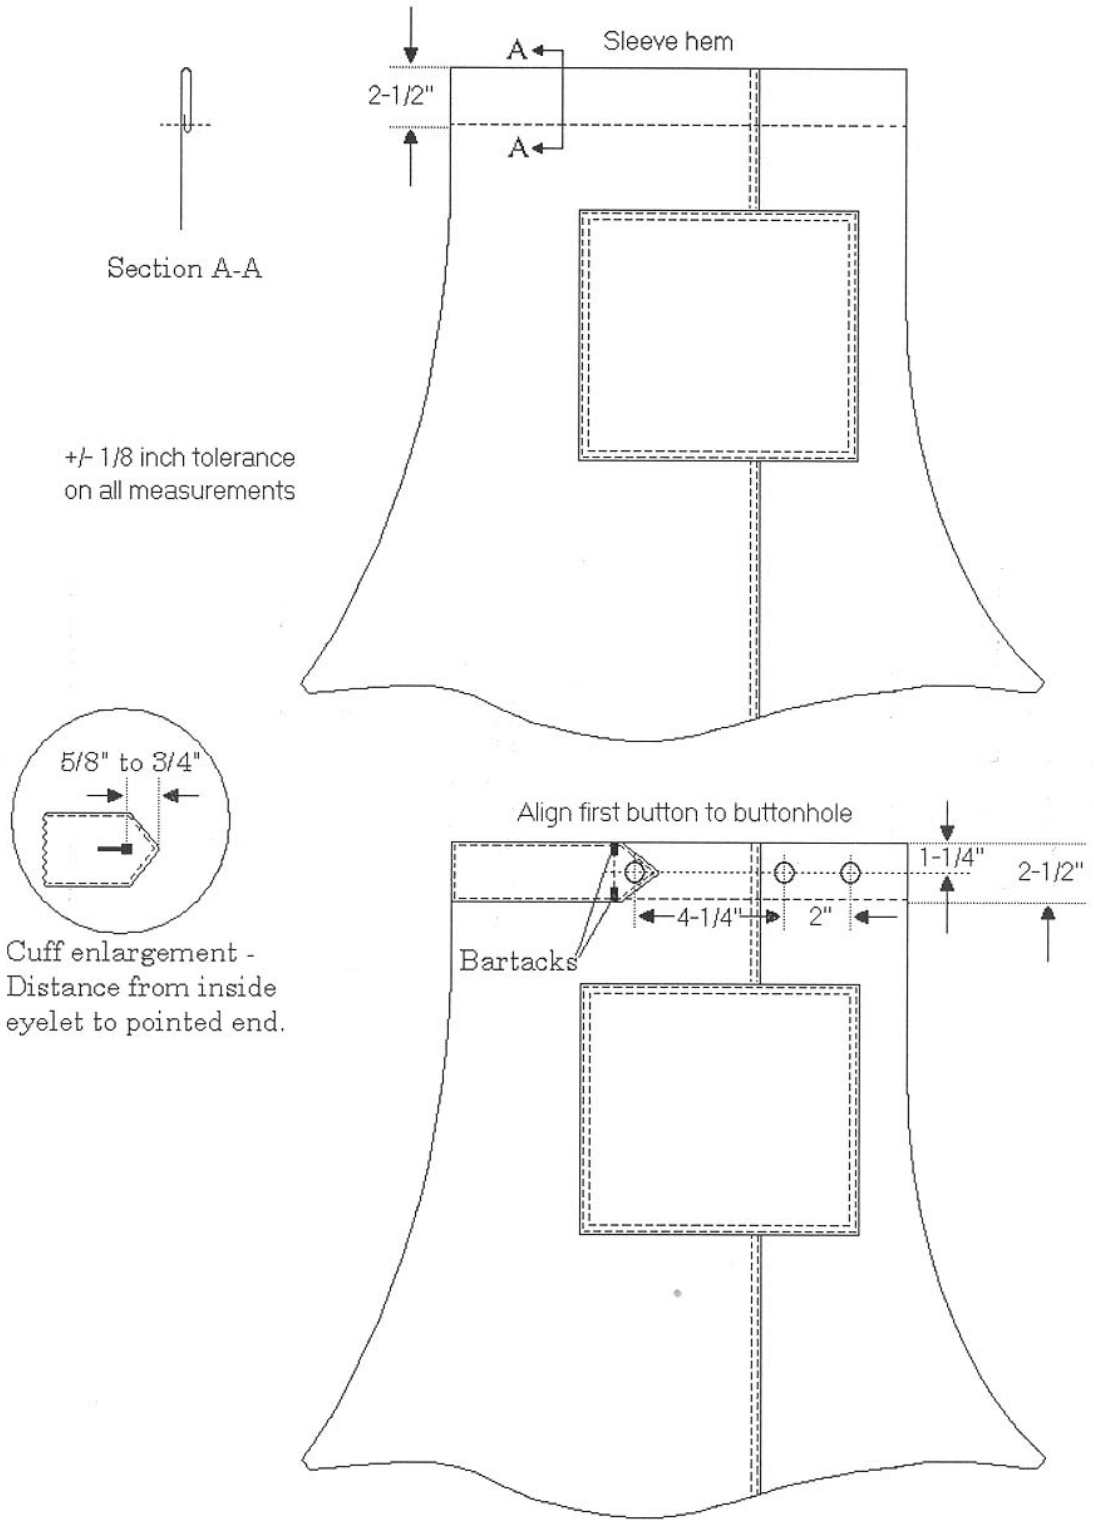


Figure 5. Alternate sleeve and cuff construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.

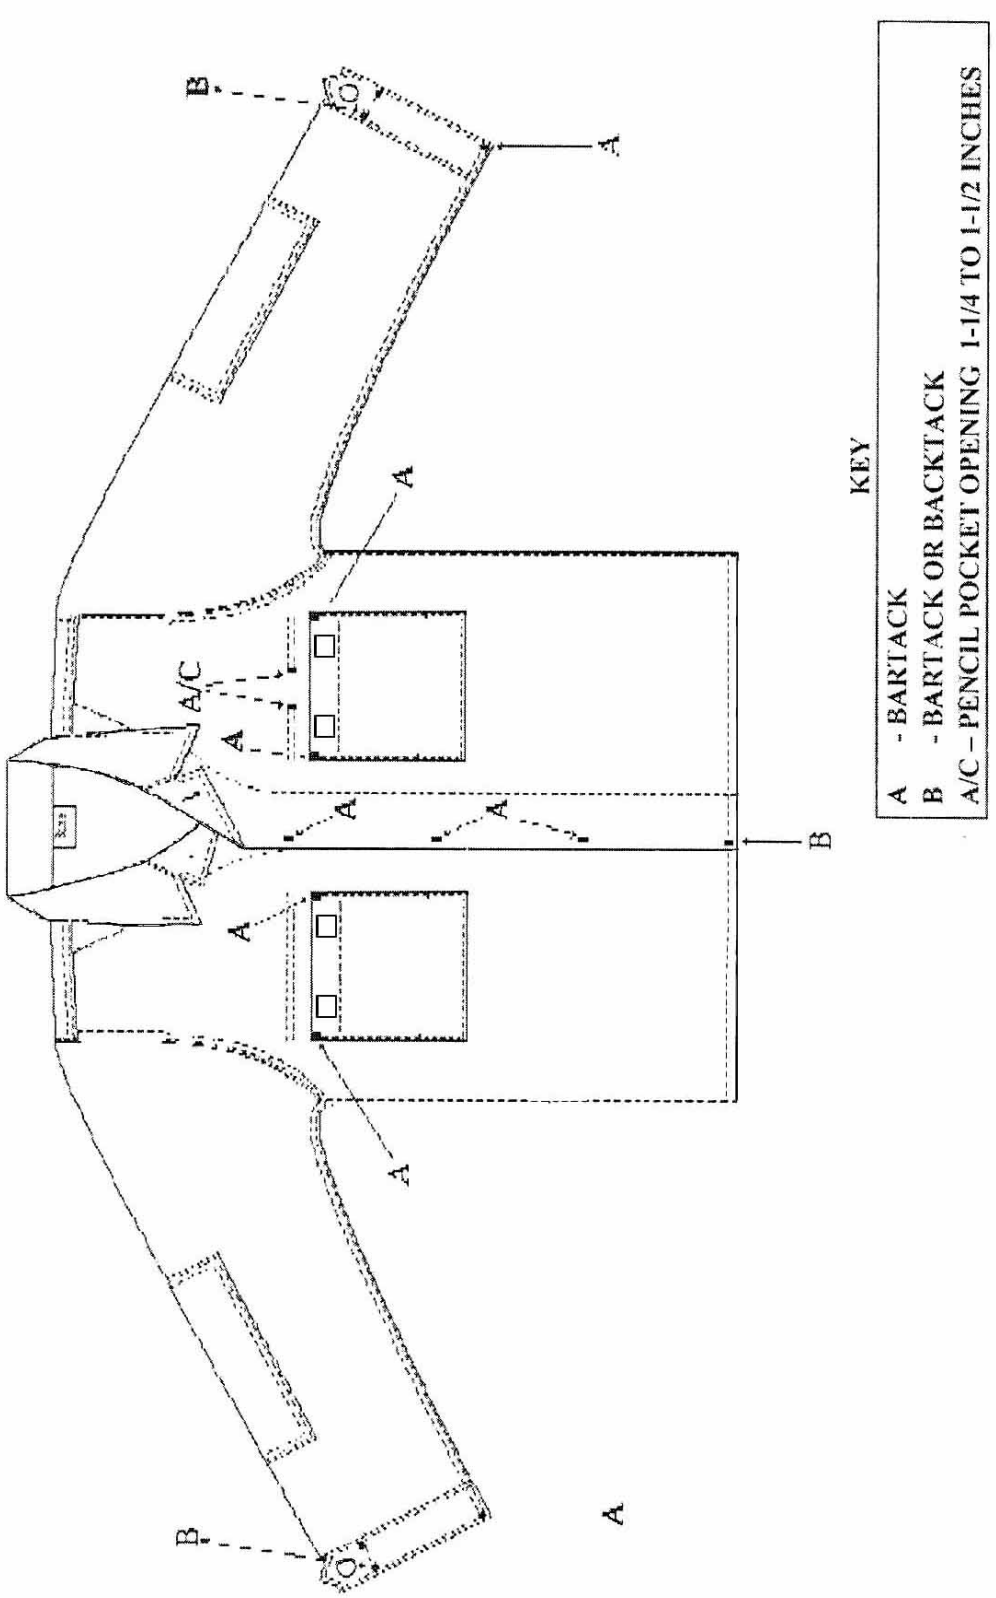


Figure 6. Bartack Placement

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:09Z
Check the source to verify that this is the current version before use.