MIL-B-1771F

8 May 1974
SUPERSEDING
MIL-B-1771E
4 October 1967

MILITARY SPECIFICATION

BARBER KIT, WITH CASE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of barber kit with plywood case.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-698	-	Steel, Sheet and Strip, Low Carbon
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings
TT-E-529	-	Enamel, Alkyd, Semi-Gloss
TT-P-636	-	Primer, Coating, Alkyd, Wood and Ferrous Metal
GGG-C-475	-	Clipper, Hair, Hand
MMM-A-181	-	Adhesive, Phenol, Resorcinal, or Melomine Base
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-P-116	-	Preservation-Packaging, Methods Of
MIL-B-121	-	Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-W-530	-	Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-F-10336	-	Fiber Sheet, Vulcanized
* MIL-G-13734	-	Germicide, Quaternary Ammonium Type

FSC 3590

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

US ARMY NATICK LABORATORIES

2-9-77 - Barber Kit, with Case; Case, Empty; Details
2-9-78 - Barber Kit, with Case; Case, Empty; Tray Details

(Miniature copies of Drawings 2-9-77 and 2-9-78, identified as figures 1 and 2 respectively, are attached for information purposes only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

* American Society for Testing and Materials (ASTM)

ASTM E 18 - Test for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

United States Department of Commerce

Commercial Standard CS 35 - Hardwood Plywood
Product Standard PS 1-66 Softwood, Plywood, Construction and Industrial

(Copies of product and commercial standards may be obtained upon application to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

Underwriters' Laboratories Inc. (UL)

Standard No. 73 - Motor-Operated Appliances

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 207 East Ohio Street, Chicago, IL 60611; 1285 Walt Whitman Road, Melville, NY 11746; or 1655 Scott Boulevard, Santa Clara, CA 95050.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.3).

* 3.2 Codes and standards. The electric hair clipper shall comply with the applicable requirements of UL Standard No. 73.

* 3.2.1 Compliance. Prior to approval of the first article, if one is submitted, or prior to commencing production, the supplier shall submit to the contracting officer or his authorized representative satisfactory evidence that the electric hair clipper that he proposes to furnish under this specification meet the applicable requirements of UL Standard No. 73.

* 3.3 Materials and components. Materials and components shall conform to the requirements specified herein and applicable drawings. Materials and components not definitely specified shall be of the quality normally used for the purpose in standard industry practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

3.3.1 Steel, sheet and strip, low carbon. The low carbon steel sheet and strip shall conform to any temper, quality, finish or edge of QQ-S-698.

3.3.2 Plywood, hardwood. Hardwood plywood shall be type 1, grade 2 face and back veneer, regular sanded, conforming to Commercial Standard CS 35. The plies and thickness shall be as specified on Drawing 2-9-77.

3.3.3 Plywood, softwood. Softwood shall be group 1, exterior type, grade B-B or better, sanded two sides, conforming to Product Standard PS 1-66. The plies and thickness shall be as specified on Drawing 2-9-77.

3.3.4 Fiber, vulcanized. Vulcanized fiber shall conform to MIL-F-10336. The thickness shall be as specified on Drawing 2-9-77.

3.3.5 Webbing. The cotton webbing shall conform to type IIa, class 7, 3/4 inch wide of MIL-W-530. The color shall be olive drab 7 (see 6.4).

3.3.6 Adhesive. Room temperature and intermediate temperature adhesive shall conform to MMM-A-181. High temperature adhesive shall conform to type II of MMM-A-181 except that the shear strength by compression loading requirement shall not apply and that the curing cycle temperature shall be 190 F minimum.

3.3.7 Primer. Primer shall conform to TT-P-636.

3.3.8 Enamel. Enamel shall conform to TT-E-529. The color shall be olive drab No. 24087 of FED-STD-595.

3.3.9 Rivets, solid, tubular, and bifurcated. Rivets shall be commercial, oval head, steel, coated with brass, copper or zinc, of the type shown on Drawings 2-9-77 and 2-9-78. The lengths shall be sufficient to provide a minimum clinch of 1/16 inch for solid and tubular rivets and 1/8 inch for bifurcated rivets.

3.3.10 Tacks, trunk. Trunk tacks shall be commercial oval head, with a square steel shank of sufficient length to provide 1/8 inch clinch.

3.3.11 Tray, aluminum. The tray shall be seamlessly die formed from a single sheet of aluminum stock 0.032 nominal thickness. The tray shall be 7-1/4 inch long, 4-1/4 inch wide and 2-1/2 inch high overall. A plus or minus 1/32 inch tolerance shall apply to the above dimensions other than thickness. The tolerance for thickness shall be the mill tolerance. Unless otherwise specified (see 6.2 and 6.5), the trays shall be Government furnished property.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

3.4 Construction.

* 3.4.1 Case. The case shall conform to the design, details and dimensions of Drawings 2-9-77 and 2-9-78, and to the requirements specified herein. The spacing of the steel bifurcated rivets and truck tacks except the bifurcated rivets, on the binding for the lid and bottom of the case shall be as specified on Drawing 2-9-77. The bifurcate rivets shall be spaced at 1-inch on centers.

3.4.1.1 Vulcanized fiber plywood panels. The plywood panels shall be fabricated from material specified in 3.3.2 or 3.3.3. Vulcanized fiber conforming to 3.3.4 shall be bonded to both surfaces of the panels with not more than one piece on any panel. The fiber shall be tightly drawn and brought flush with the edges of the panels, making a smooth surface free from waves or irregularities. Bonding shall conform to 3.4.1.1.1 or 3.4.1.1.2.

3.4.1.1.1 Unit bonding process. The vulcanized fiber and wood veneers shall be glued with adhesive specified in 3.3.6, assembled, pressed, and cured in one operation.

3.4.1.1.2 Two-step bonding process. The vulcanized fiber shall be bonded to the plywood with adhesive specified in 3.3.6.

3.4.1.1.3 Application of adhesive. The adhesive shall be applied in the manner recommended by the manufacturer. Pressure, pressing time, assembly periods, and curing temperature shall conform to recommendations of the adhesive manufacturer.

3.4.1.1.4 Resistance of delamination. There shall be no delamination or weakness of bond in glue line when tested as specified in 4.6.1.2.

3.4.1.1.5 Fiber adhesion. The adhesive bond of the fiber to plywood shall have a fiber failure of 90 percent minimum and minimum 95 percent average of the bonded area when tested as specified in 4.6.1.3.

3.4.1.2 Case, tray. The tray for the barber kit case shall be fabricated from material specified in 3.3.4 and shall conform to the design and the dimensions as shown on Drawings 2-9-77 and 2-9-78. The angles of the formed tray shall not cause bulging, distortion, or prevent the closing of the lid when the tray for the barber kit case is seated in the body of the barber kit case.

3.4.1.3 Metal bindings. The metal valance binding shall be fabricated from material specified in 3.3.1 and shall conform to the design and dimensions shown on Drawings 2-9-77 and 2-9-78. The bindings shall be on one piece construction with tight mitered joints at the corners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

3.4.1.4 Fiber bindings. Fiber bindings shall be fabricated from material specified in 3.3.4 and shall conform to the dimensions shown on Drawing 2-9-77.

3.4.1.5 Hardware. The hardware components shall be commercial steel and shall be similar to the components shown on Drawings 2-9-77 and 2-9-78. The edges of the hardware shall be rounded prior to finish applications and assembly to the case. The thickness of the material for the hasp and hinge shall be a nominal 0.0478 inch. The thickness of the material for all other hardware shall be from 0.0239 to 0.0359 inch.

3.4.1.6 Driving of rivets and cut trunk tacks. Holes for rivets shall be drilled through fiber and plywood and shall be no larger than the diameter of the rivet. Rivet holes in the hardware shall provide a clearance of 0.015 inch, maximum. All rivets and trunk tacks shall be driven with head flush against hardware, binding or fiber, as applicable, and shall be clinched or peened to provide smooth interior surfaces. The diameter and size number for the rivets shall be as recommended by the rivet industry.

3.4.1.7 Gluing and nailing. All joints of the case panels shall be glued with the adhesive specified in 3.3.6 in addition to being tacked.

* 3.4.1.8 Padlock with clevis and chain. The barber kit case shall have a commercial padlock, 9/16 to 11/16 inch wide with clevis and chain attached to the case in accordance with manufacturer's commercial practice.

3.4.2 Components, barber kit. The components specified in table I shall be orderly arranged for security in the barber kit case.

TABLE I. Components

Item No.	Component	Quantity
1	Blade set clipper, hair, hand, size No. 0	1 each
2	Clipper, hair, hand, size No. 0	1 each
3	Blade, double edge, razor, safety plastic coated (5 in package)	8 packages
4	Blade, adaptable, size 3-1/2, "Butch Type", used with clipper, hair, electric, item No. 6	1 each
5	Case, barber kit, empty	1 each
* 6	Clipper, hair, electric, universal type motor, 115 volts AC-DC, 25-60 Hertz, single-phase, 40-watt (maximum) AC, 1700-2300 strokes per	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

TABLE I. Components (cont'd)

Item No.	Component	Quantity
	minute cutting blade speed, with detachable cutter head, with cord, blade guard and case, and with the following accessories:	1 each
	1 each blade, size 1 1 each blade, size 000 1 each brush, blade cleaning 1 each brush set, carbon (set of 2) 1 each oil, clipper, electric	
7	Cloth, barber, dark green, minimum size 40 x 40 inches, cut edges hemmed	2 each
8	Comb hair, barber type, any color, (professional) 7-1/4" lg, tapered, manufacturer's commercial plastic or rubber material	2 each
9	Cream, shaving, brushless type 4-6 oz. tube	1 each
10	Germicide, quarternary ammonium type, type-1, crystalline, 1 oz. packet	2 each
11	Razor, safety, two shaving sides, metal	1 each
12	Shears, barber type (professional), 7-1/4 - 7-1/2" lg	2 each
13	Soap, toilet, soft, 3-1/2 oz. min. (personal size)	2 bars
14	Soapbox, plastic, any color, to accomodate 3-1/2 oz. soap (personal size)	1 each
15	Tray, instrument, aluminum	1 each

3.4.3 Clipper, hair, hand. The hand hair clippers shall conform to size No. 0 of GGG-C-475, except the clipper cap may be fabricated from steel or any soft plastic material.

3.4.4 Blade, clipper, hair, hand. The blade set for the No. 0 size hand clippers shall conform to GGG-C-475.

3.4.5 Clipper, hair, electric. The electric hair clipper shall have detachable cutting blades and shall be electrically operated by a universal AC-DC motor rated at 115 volt, 40 watt (maximum), 25-60 Hertz AC, single phase. Speed and gearing of motor shall provide cutting blade speeds of 1700 to 2300 strokes per minute. The motor housing shall be fabricated from an impact resistant synthetic, a corrosion-resistant, or a suitably

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

finished or plated metal material, shall have means for easy access to motor brushes, a hanger or bail and a quick make/break motor switch rated at a minimum of 3 amperes DC. The chord set shall have a 2-conductor, 8-foot minimum length chord with a strain relief provided at the entry to the motor housing. The clipper blades shall have a Rockwell "C" hardness of 58, minimum when tested as specified in 4.6.2. The weight of the clipper complete with cutter and chord shall be no more than two (2) pounds.

3.4.6 Disinfectant. The disinfectant shall conform to type I of MIL-G-13734. The disinfectant shall be formulated to contain 10 percent active product, crystalline form.

3.5 Finish.

3.5.1 Preparation of surfaces.

3.5.1.1 Metal surfaces. All unfinished hardware and metal surfaces, including rivets and burrs (when applicable), but excluding tacks, shall be pretreated in accordance with TT-C-490.

3.5.1.2 Wood and fiber surfaces. All wood and vulcanized fiber surfaces shall be thoroughly cleaned of dust, dirt and grease prior to priming.

3.5.2 Priming. The thoroughly dried surfaces, prepared as specified in 3.5.1.1, shall be coated with primer specified in 3.3.7. All hardware, metal and fiber components shall be primed on all surfaces and edges prior to assembly. The primer coat on metal parts shall be baked for not less than 45 minutes at 250 F, or for a time-temperature cycle recommended in accordance with standard industry practice. The case body, lid and tray shall be primed prior to assembly of hardware and bindings. The primer coat shall be thoroughly dry prior to assembly of the hardware, metal and fiber parts. Force drying is permitted, provided a surface temperature of 140 F is not exceeded and the relative humidity of the surrounding air is maintained at 30 percent to 50 percent.

3.5.3 Enameling. After attachment of all hardware, metal and fiber parts to the primed case body, lid, and tray, the exterior and interior surfaces shall be coated with enamel specified in 3.3.8.

3.6 List, barber kit components. The list of the barber kit components, as shown in table I, shall be printed on a waterproof label with waterproof ink. The characters shall be 10 point bold face and the heading characters shall be 12 or 14 point bold face type. The list shall be securely attached as shown on Drawing 2-9-77.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

3.7 Label, instructions for care of tools. The instructions for care of tools label shall be printed on waterproof paper with waterproof ink. The printed characters shall be 10 point bold face type for the body and 12 or 14 point bold face type for the headings. Label readings shall be from left to right when case lid is open. The label shall be securely attached to the inside of case lid in the location shown on Drawing 2-9-77. Tool care instructions shall include the following:

Instructions for the

Proper Care of Tools, Barber

BARBER KIT, WITH CASE

Sterilization. Keep all parts of equipment clean. Detach cutter head from electric clippers and brush away debris. Wash clippers, combs, safety razor, blades, electric clipper detachable cutter head, and shears with soap and water to remove all film and debris immediately after use on each patron. After washing, all instruments shall be immersed for 15 minutes in a solution prepared in accordance with manufacturer's recommended instructions. All instruments disinfected by chemical solution shall be rinsed in water after immersion in the solution to remove the chemical, and dried before being used on patrons. Solutions shall be changed daily. Before putting kit away, dry everything completely.

Sharpening.

(a) Clipper - If clipper blades get dull, replace with extra set and exchange dull blades for a new pair at the first opportunity. Do not attempt to sharpen blades in the field.

Care. Protect metal equipment against rust. Apply light film of oil if kit is to be left unused for several days. Oiling is particularly important in humid climates.

3.8 Marking for identification. The letters "U.S." shall be marked in the size and location on the barber kit case as shown on Drawing 2-9-77. Manufacturer's name or readily identifiable trademark and year of manufacture shall be printed at the bottom of the list of components.

3.9 Workmanship. All surfaces of the finished barber kit case and components shall be free of burrs, slivers and rough or sharp edges. Components shall not be broken, cracked, or malformed. The enamel coating shall level out to a continuous, smooth, dry adherent film thickness without runs, drops, streaks, or area of no film. The coating shall be free from embedded foreign matter and shall show no evidence of peeling, flaking or blistering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, the barber kit with case shall be examined for defects in table III, dimensions specified, and tested in accordance with 4.6.2.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, quality shall be based on sampling and inspection in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Components and materials inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements or referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection.

4.4.2.1 Process examination. Inspection shall be made during the manufacturing process for compliance with the requirements specified in table II, to determine that no deviation is made from indicated requirements. Whenever nonconformance is noted, correction shall be made to affected items and process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

TABLE II. Process examination

Requirement	Requirement paragraph
Diameter of rivet holes and rivet clinching length	3.4.1.6
Surface preparation	3.5.1.1 and 3.5.1.2
Priming	3.5.2

* 4.4.2.2 Intermediate testing. Prior to painting, the panels shall be tested for fiber adherence to plywood. The sample unit shall be one plywood panel with fiber bonded to both sides. The lot shall be all of the panels glued and bonded under the same process and control, offered for inspection at one time. Three sample units shall be selected from each lot. Two test specimens conforming to 4.6.1.1 shall be cut from each sample unit and tested as specified in 4.6.1.2 and 4.6.1.3. Any nonconformance shall be cause for refection of the lot.

4.4.3 End item inspection. The lot shall be all the barber kits, complete with case and components, offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated barber kit case and assembled barber kit components.

4.4.3.1 Visual examination. Examination shall be made of the end item for defects in table III. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE III. Classification of defects

Examine	Defect	Classification Major	Minor
Finish (applicable to case)	Not uniform color		X
	Not color enamel specified		X
	Area of no film		X
	Not smooth, continuous or adherent	X	
	Has runs, drops or streaks		X
	Evidence of peeling, flaking or blistering	X	
	Imbedded foreign matter		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction, assembly and workmanship of case	Part not in proper alignment	X	
	Component not type specified	X	
	Component loose or insecurely attached		X
	Fiber covered panel not smooth or free from waves or irregularities		X
	More than one sheet of fiber on each panel		X
	Lid binds or will not close	X	
	Sharp edge or burr	X	
Hardware	Broken or malformed, corroded areas, burrs or sharp edges	X	
Attachment of hardware	Mating hardware not aligned		X
	Not attached as shown on Drawings 2-9-77 and 2-9-78		X
Attachment of rivets	Any rivet missing		X
	Not oval head		X
	Rivet not peened or curled		X
	Rivets not completely seated	X	
	Rivet head missing		X
	Any rivet reversed, e.g., head is not on the intended side of component as required	X	
Attachment of valances and bindings	Not riveted tightly to edges		X
	Ends visible after hardware attachment		X
	More than two on any edge	X	
Kit components, and component arrangement in kit	Kit component missing	X	
	Not as specified	X	
	Incorrect quantity		X
	Kit component damaged	X	
	Component will not fit into proper place	X	
Identification marking	Missing, illegible, incorrect, wrong location, or not as specified		X
	"U.S." not detailed as shown on Drawing 2-9-77		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Webbing	Edges frayed or scalloped		X
Padlock keys	Padlock missing	X	
	Padlock will not function	X	
	Two keys missing	X	
	One key missing		X

4.4.3.2 Dimensional examination. Examination shall be made of the barber kit components, with case, for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

* 4.4.3.3 End item testing. When a first article is not required, the first produced barber kit with case shall be examined as specified in 4.4.3.1 and 4.4.3.2 and tested as specified in 4.6.2. Any nonconformance shall be cause for rejection of the inspection lot.

4.4.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be as indicated in table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing or damaged
Workmanship	Bulging or distortion of containers
Contents	Number of packages per shipping container is more or less than required

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

4.4.4.1 Examination for closure and strapping of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

* 4.5 Certificate examination. Certificate of compliance, certified test reports, approval label or listing marks for codes and standards, as applicable, that are submitted as proof of compliance with the specification requirements shall be examined and validated.

4.6 Tests.

4.6.1 Vulcanized fiber to plywood bond.

4.6.1.1 Test specimens. The test specimens shall be 4 inch square plywood panels having fiber bonded to both sides. The specimens shall be untreated and unpainted.

4.6.1.2 Boiling and quench test. The test specimens conforming to 4.6.1.1 shall be immersed in boiling water for 3 hours, followed by quenching in water at room temperature (70 F plus or minus 5 F). The specimens shall be examined immediately after quenching to determine compliance with 3.4.1.1.4.

4.6.1.3 Fiber adhesion test. Specimens conforming to 4.5.1.1 shall have a sharp knife blade or similar instrument inserted at the glue line and the vulcanized fiber shall be peeled off. The percentage of fiber failure for each specimen shall be estimated and the average fiber failure for all specimens tested shall be computed to determine compliance with 3.4.1.1.5.

* 4.6.2 Hardness test. Hardness of blades, size 1 and 000 based on the average of 3 readings shall be tested in accordance with ASTM E-18 to determine compliance with hardness requirements of 3.4.5. Any nonconformance shall constitute failure to pass this test.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Preservation. All clipper blades, detachable cutter head for electric clippers, and exposed, uncoated, ferrous metal surfaces of the clippers, shears, and razor shall be cleaned process C-1, thoroughly dried, and coated with preservative conforming to P-14 of MIL-P-116. Preserved items shall be individually wrapped in barrier material conforming to type II, grade A, class 1 or 2 of MIL-B-121 and the wrap secured with tape. Each clipper blade shall be placed in a paperboard box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

5.1.1.2 Packaging. The two bars of toilet soap shall be individually packaged in accordance with the industry's practice. Each comb shall be wrapped in minimum 30-pound basis weight (24 x 36 - 500) kraft paper and the wrap secured with tape. The two barber cloths shall each be compactly folded.

5.1.1.3 Placement of components. The components of the barber kit shall be placed in the case. The two hand clippers shall be placed in their respective compartments in the case tray, and the combs and shears shall be placed in the retainers in the lid. The two folded barber cloths shall be placed over the case tray. The remaining components of the kit shall be immobilized with single-wall corrugated fiberboard pads or forms. The kit case shall then be closed and secured with the latches and padlock. The two keys shall be placed in a cotton cloth drawstring bag and bag tied securely to the padlock.

5.1.2 Level C. Barber kits shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Four barber kits, preserved and packaged as specified in 5.1, shall be packed flat in two layers with the handles facing the center, in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Four barber kits preserved and packaged as specified in 5.1, shall be packed flat, in two layers with the handles facing the center, in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a V3c or V3s or V4s, fabricated and inclosed in accordance with PPP-B-636.

5.2.3 Level C. Barber kits, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The barber kit with case covered by this specification is intended for use of military personnel in the field.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When first article is not required (see 3.1, 4.3 and 6.3).
(c) When trays are not furnished as Government furnished property (see 3.3.11).
(d) Selection of applicable levels of packing and packaging (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard is required for level B pack (see 5.2.2.1).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Samples of the approved shade of olive drab cotton webbing may be obtained from the procuring office (see 3.3.5).

6.5 Government furnished property. The contracting officer should arrange to furnish the tray specified in 3.3.11. The Federal Stock Number for this tray is FSN 3590-222-2766.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

6.6 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire irrespective of marginal notations, and relationship to the last previous issue.

Custodians:

Army - GL
Navy - MC
Air Force - 84

Preparing activity:

Army - GL

Project No. 3590-0025

Review activity:

Army - MD

User activities:

Navy - CG, SA

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.


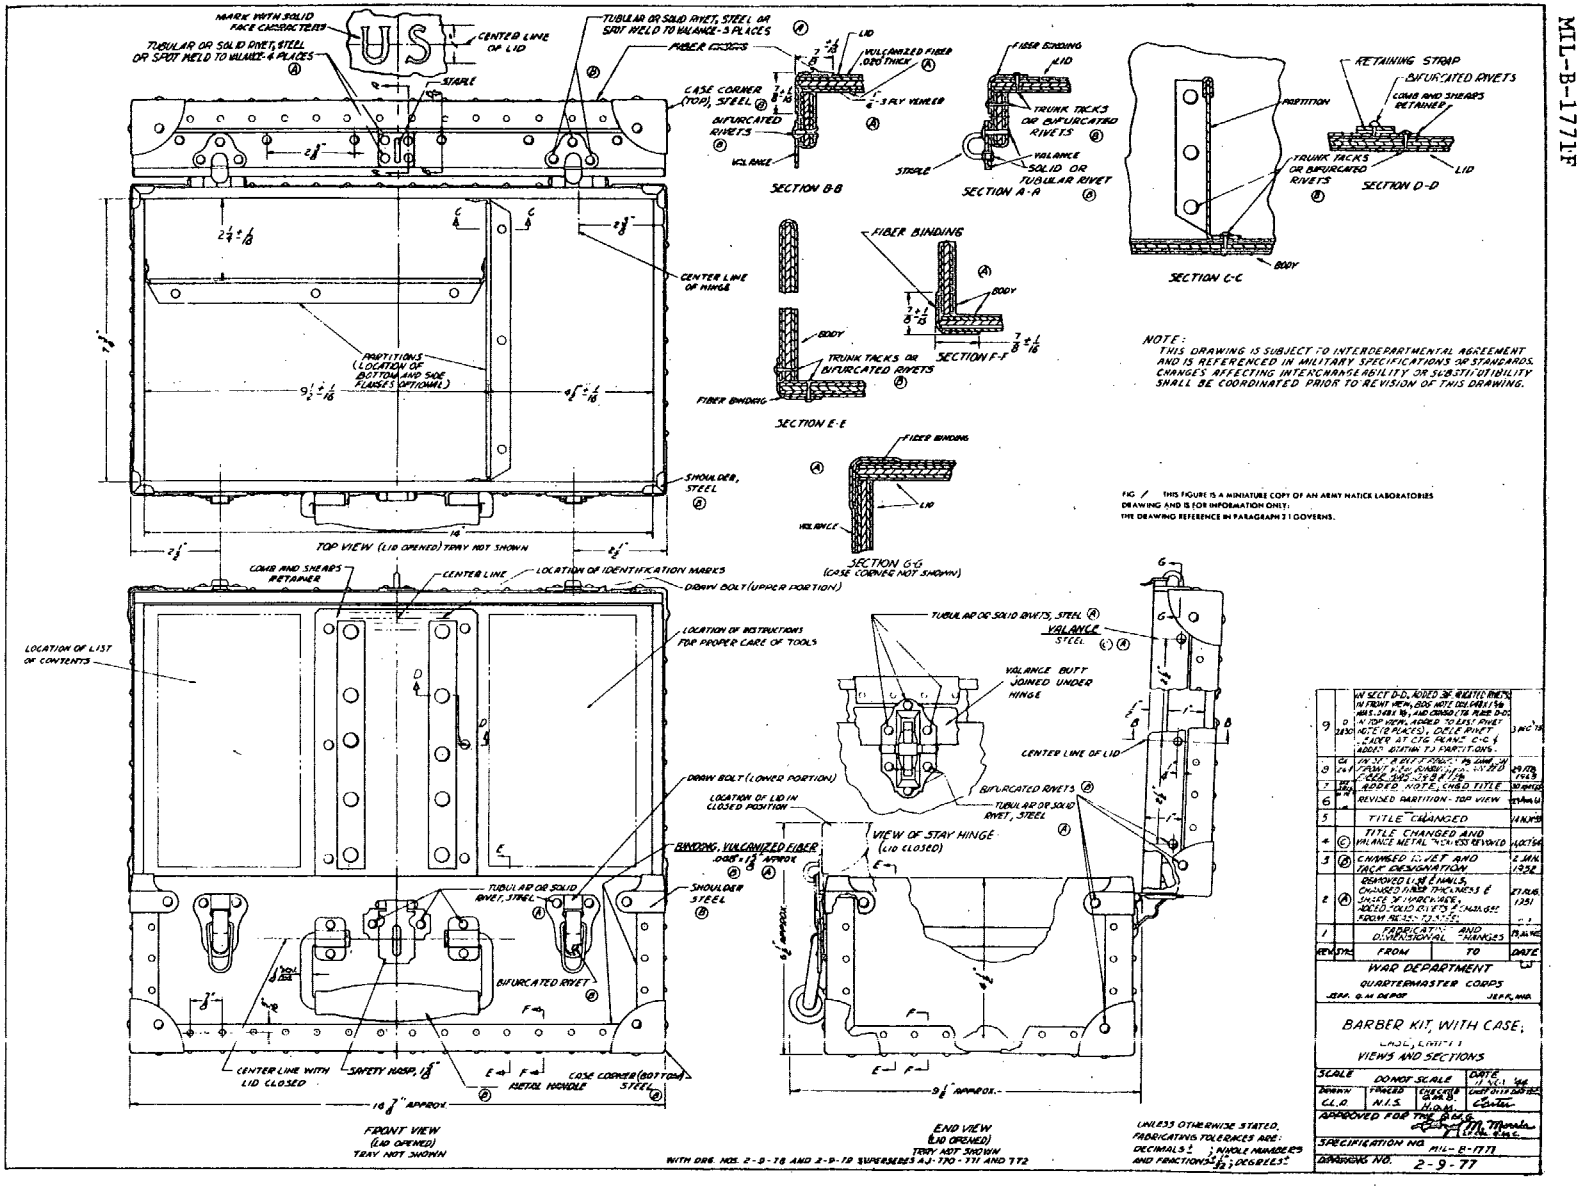


FIG. 1 THIS FIGURE IS A MINIATURE COPY OF AN ARMY MATICK LABORATORIES DRAWING AND IS FOR INFORMATION ONLY; THE DRAWING REFERENCE IN PARAGRAPH 3.1 GOVERNS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

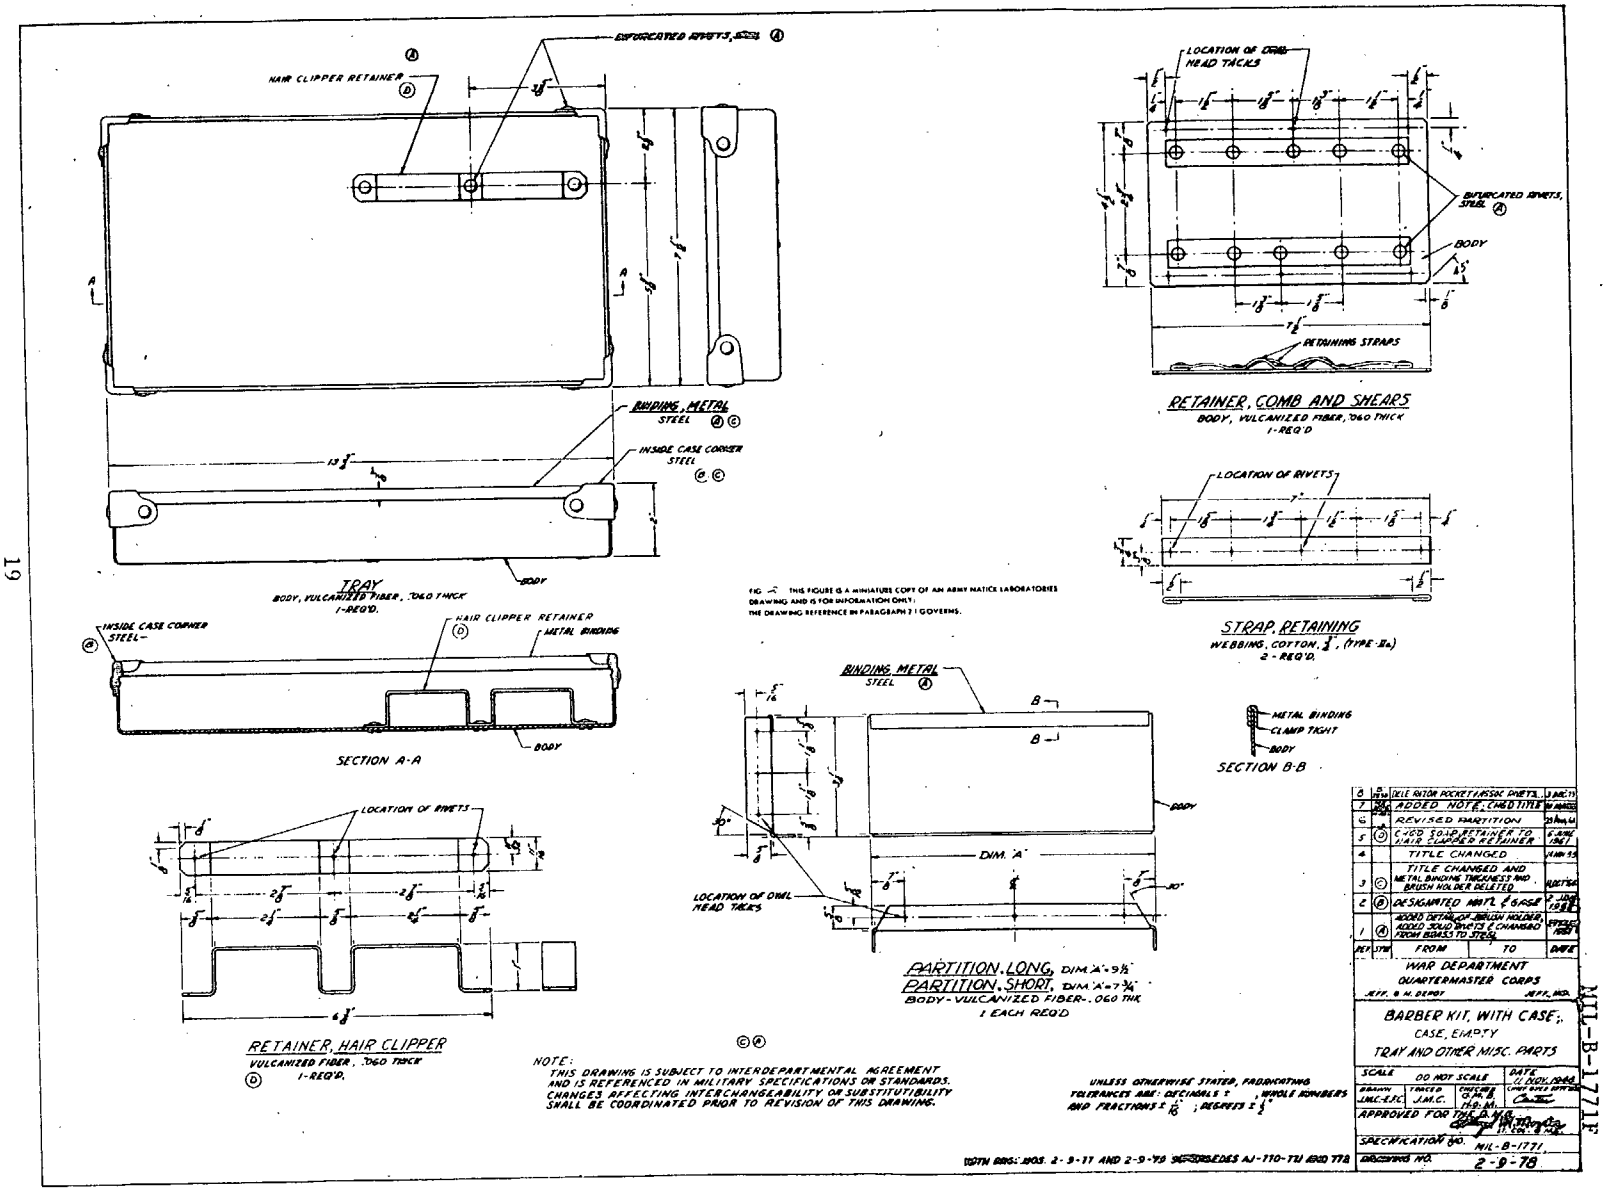

LTR	ZONE	REVISIONS		DATE
		FROM	TO	
A		DELE RATOR POCKET / ASSOC SHEETS		3 DEC 71
B		ADDED NOTE; CHG'D TITLE		29 MAY 74
C		REVISED PARTITION		29 MAY 74
D		C/GD SOLID RETAINER TO HAIR CLIPPER RETAINER		6 JUNE 1967
E		TITLE CHANGED		4 NOV 75
F		TITLE CHANGED AND METAL BINDING THICKNESS AND BRUSH HOLDER DELETED		16 OCT 84
G		DESIGNATED MAT'L & ASSE		6 JUNE 1985
H		ADDED DETAIL OF BRUSH HOLDER, ADDED SOLID RIVETS & CHANGED FROM RIVETS TO STEEL		27 SEPT 1988

WAR DEPARTMENT
QUARTERMASTER CORPS
AEFF. S. M. DEPOT — AEFF. NO.

BARBER KIT, WITH CASE:
CASE, EMPTY
TRAY AND OTHER MISC. PARTS

SCALE	DO NOT SCALE	DATE 11 DEC 1944
DRAWN J.M.C.-E.F.C.	TRACED J.M.C.	CHECKED C.M.B. H.H.M.

APPROVED FOR THE Q.M.G.
SPECIFICATION NO. MIL-B-1771,
EFFECTIVE NO. 2-9-78

MIL-B-1771F

NOTE:
THIS DRAWING IS SUBJECT TO INTERDEPARTMENTAL AGREEMENT AND IS REFERENCED IN MILITARY SPECIFICATIONS OR STANDARDS. CHANGES AFFECTING INTERCHANGEABILITY OR SUBSTITUTIBILITY SHALL BE COORDINATED PRIOR TO REVISION OF THIS DRAWING.

UNLESS OTHERWISE STATED, FABRICATING TOLERANCES ARE: DECIMALS ± , WHOLE NUMBERS AND FRACTIONS ± 1/16 ; DEGREES ± 1/2°

19TH BRS.: BOS. 2-9-11 AND 2-9-78 SUPERSEDES AJ-170-TU 18SD 7TB

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Barber Kit, With Case MIL-B-1771F

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.