MIL-C-1761C

13 August 1968
SUPERSEDING
MIL-C-1761B
1 May 1963

MILITARY SPECIFICATION

CASE, MAIL DISTRIBUTION, PORTABLE, 81 SEPARATIONS

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size portable mail distribution case with 81 separations.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

	V-T-285	- Thread, Polyester
	FF-N-103	- Nails (small) and Tacks; Cut
	QQ-B-626	- Brass, Leaded and Non-Leaded; Rod; Shapes, Forgings and Flat Products with Finished Edges (Bar, and Strip)
	QQ-P-416	- Plating, Cadmium (Electrodeposited)
*	QQ-T-830	- Tube, Steel, Carbon Mechanical, Seamless and Welded
	QQ-W-321	- Wire, Brass
*	QQ-W-461	- Wire, Steel, Carbon, Round Bare and Coated
	QQ-Z-325	- Zinc Plating, Electrodeposited, Requirements For
	RR-C-271	- Chains, and Attachments, Welded, Weldless, and Roller Chain
*	TT-E-529	- Enamel, Alkyd, Semi-Gloss
	TT-P-666	- Primer Coating, Zinc Yellow, for Aluminum Surfaces
*	WW-T-700/6	- Tube, Aluminum Alloy, Drawn, Seamless, 6061
	CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered
	CCC-D-950	- Dyeing and After-Treating Processes for Cotton Cloths

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

*	PPP-B-601	-	Boxes, Wood, Cleated-Plywood
	PPP-B-636	-	Boxes, Fiberboard
*	PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade)
	PPP-T-60	-	Tape; Pressure-Sensitive Adhesive Waterproof - Packaging and Sealing
	PPP-T-76	-	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant (For Carton Sealing)

MILITARY

	MIL-C-5541	-	Chemical Films and Chemical Film Materials for Aluminum and Aluminum Alloys

STANDARDS

FEDERAL

	Fed. Std. No. 66	-	Steel: Chemical Composition and Hardenability
	Fed. Std. No. 595	-	Colors
	Fed. Std. No. 751	-	Stitches, Seams and Stitching

MILITARY

	MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
	MIL-STD-129	-	Marking for Shipment and Storage
	MIL-STD-130	-	Identification Marking of U. S. Military Property
*	MS 16562	-	Pins, Spring, Tubular, Slotted

DRAWINGS

ARMY NATICK LABORATORIES

	5-13-37	-	Case, Mail Distribution, Portable, 81 Separations
	5-13-38	-	Sections
	5-13-39	-	Top and Side Frames and Members
	5-13-40	-	Bottom Frame, Top and Bottom Boards and Other Details
	5-13-41	-	Back and Side Panels, Covers and Partitions

(Miniature copies of Drawings 5-13-37 through 5-13-41, identified as figures 1 through 5 respectively, are attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

* D 2016-62 - Standard Methods of Test for Moisture Content of Wood.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced a sample of the finished item shall be submitted or made ready for the contracting officer or his authorized representative for approval as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

* 3.2 Material.- The material used shall conform to the applicable referenced specifications, standards, and requirements specified hereinafter.

3.2.1 Tube.-

* 3.2.1.1 Tube, aluminum alloy, round.- The aluminum alloy round tube shall conform to 6061-T6 of WW-T-700/6.

* 3.2.1.2 Tube, steel.- Tube used for wall reinforcement shall conform to QQ-T-830.

* 3.2.2 Wire, round, carbon steel.- The carbon steel wire shall be round form, conforming to QQ-W-461.

3.2.3 Wire, brass.- The brass wire shall conform to composition 7, half hard, of QQ-W-321.

3.2.4 Rod, brass.- The brass rod shall conform to copper alloy number 360, half hard temper of QQ-B-626.

* 3.2.5 Eye bolts, screws, spring pins, washers and tee nuts.- The eye bolts for the top frame shall be as specified on Drawing 5-13-40. Other eye bolts, screws, spring pins, washers and tee nuts shall be steel, cadmium plated, standard commercial items, and of the kind and size shown on applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

3.2.6 Tacks, bill poster.- The bill poster tacks shall be steel, type II, style 2, size No. 6, blue finish in accordance with FF-N-103.

* 3.2.6.1 Staples.- As an alternative to the tacks, 1/2-inch leg staples of heavy duty corrosion-resistant steel wire may be used.

3.2.7 Chain, sash.- The sash chain shall be zinc-coated steel and shall weigh approximately 6-3/4 pounds per 100 feet. The chain shall conform to type II, class 3 of RR-C-271.

* 3.2.8 Chain, suspension.- The suspension chain shall be zinc-coated steel and shall weigh approximately 25 pounds per 100 feet. The chain shall be a double-loop pattern and shall conform to type II, class 2 of RR-C-271.

* 3.2.9 Lumber.- The lumber shall be uniformly kiln dried at time of fabrication to a moisture content of 8 to 12 percent when tested in accordance with 4.4.1.1. Lumber shall be sound and free from case hardening, shake, checks, warp, decay, loose knots and larvae channels. Not more than two sound knots, 1/2 inch maximum diameter, or one sound knot, 3/4 inch maximum diameter, will be permitted per square foot. Gum spots, small bark or pitch pockets, streaks, stains and holes not greater than 1/16 inch diameter will be permitted. Holes shall be filled before finishing of wood. Boards may be made up of edge glued stock, with no more than three strips in each board. Adhesive used shall be water resistant. Any of the following species of lumber may be used: Basswood, Cottonwood, Yellow Poplar, or Pine (Eastern White or Western White).

3.2.10 Cloth, cotton, duck.- The cloth shall be 8.25 ounces per square yard and shall conform to type III of CCC-C-419.

3.2.10.1 Color and treatment.- The cloth shall be olive drab shade No. 7 and shall conform to type I, class B of CCC-D-950.

* 3.2.11 Thread, polyester.- The thread shall conform to type I, class 1, subclass B of V-T-285. The thread shall show fastness to weathering equal to or better than the standard sample (see 6.3). The thread size shall be as follows:

For all stitching except overedge stitching and bartacking	Size F
For overedge stitching and bartacking	Size E

3.2.11.1 Color and treatment.- The thread shall be dyed to match shade S-1 (Cable No. 66022) of V-T-285.

3.2.12 Primer.- The primer shall conform to TT-P-666.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 3.2.13 Enamel.- Enamel shall conform to class A or B of TT-E-529. The color shall be olive drab color X24087 of Fed. Std. No. 595.

* 3.3 Design and construction.- The design and construction of the mail distribution case shall conform to the drawings listed in section 2 and as specified herein.

3.3.1 Hardware.-

* 3.3.1.1 Eye bolts.- The bolts for the top frame shall be modified as shown on Drawing 5-13-40 to include a groove to take the clevis specified in 3.3.1.2.

3.3.1.2 Clevis.- The clevis shall be fabricated of brass wire specified in 3.2.3.

3.3.1.3 Rod, stiffener.- The stiffener rod shall be fabricated of round steel wire specified in 3.2.2.

3.3.1.4 Rivet.- The truss head rivets used for the hinge pin shall be standard commercial, of the sizes shown on the drawings.

3.3.1.5 Plug.- The plugs shall be fabricated of round brass rod specified in 3.2.4.

3.3.2 Stitching, machine.-

3.3.2.1 Types of stitching.- All stitch types, except bartacking, shall conform to Fed. Std. 751, as follows:

For all stitching, except overedge stitching	Type 301, 6 to 8 stitches per inch.
For overedge stitching	Type 304, 14 to 16 stitches per inch; type 503, 504, or 505, 6 to 8 stitches per inch.
* For bartacking	Bartack, 5/8 ± 1/16 inch long with 1/8 inch bight, and shall contain 42 stitches.

* 3.3.2.2 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1-inch on stitch type 301. Overedge stitching thread breaks shall be overstitched not less than 3/4 inch at each break. Bartacks shall be free of thread breaks.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:43Z
Check the source to verify that this is the current version before use.

* 3.3.2.3 Stitching ends.- Stitching ends shall be overstitched not less than 1 inch except where ends are turned under in a hem or are held down by other stitching.

* 3.3.2.4 Skipped stitches.- Skipped stitches shall be overstitched not less than 1 inch on type 301 or 304 stitching where two or more consecutive skipped stitches occur.

* 3.3.2.5 Thread lubrication.- Lubrication of thread prior to or during sewing is prohibited.

3.3.3 Handstitching.- The ends of the tubes on the shelves in which the stiffener rods are inserted shall be folded toward the center of the case and fastened, using two strands of thread, not less than five stitches completely encircling the rod. The ends of the thread shall be secured to prevent raveling.

3.4 Finish.-

* 3.4.1 Aluminum frame.- The exterior aluminum surfaces shall be given a chemical film in accordance with class 2 of MIL-C-5541.

3.4.2 Steel hardware.- All steel hardware such as rivets, stiffener rods, clevises and retaining pins shall be given an electrodeposited zinc or cadmium finish. The zinc plating shall conform to class 2, type III of QQ-Z-325, and the cadmium plating shall conform to class 2, type III of QQ-P-416.

3.4.3 Priming.- All exterior surfaces of the frame, hardware, and wood members shall be coated with primer specified in 3.2.12.

* 3.4.4 Enameling.- The dry primed surfaces of the frame, hardware and wood members shall be coated with enamel specified in 3.2.13. The coating shall level out to an adherent, continuous, uniform film and shall be free from area of corrosion, scratch, dig, or abrasion exposing bare surfaces.

3.5 Marking for identification.- Identification marking shall be in accordance with MIL-STD-130. The letters "U.S.", approved nomenclature, stock number, manufacturer's trade name or trademark of such known character as to be easily identifiable with said manufacturer, and contract number shall be marked in the size, characters and location shown on Drawing 5-13-37.

* 3.6 Workmanship.- Cloth components shall be clean and free of holes, cuts or tears or cloth defects such as multiple floats or broken or missing yarns. Seam allowances shall be maintained with seams sewed so that no run-offs, twisted, pleated or open seams shall result. Thread tension shall be maintained

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

so that there shall be no loose or tight stitching. All thread ends shall be trimmed to 1/2 inch or less in length. Care shall be exercised in sewing to see that no needle chews occur. Metal components shall be free of burrs, sharp edges, corroded areas and shall not be broken or malformed. Painted surfaces shall be smooth, uniformly coated, free of runs, wrinkles, and grit. Rivets shall be securely set except where parts are hinged. Hinged parts shall be riveted so as to permit movement without being excessively loose. The assembly shall be easily operated and capable of being fully opened. All sheet metal and machine screws shall be screwed straight and securely into position. All tacks or staples shall be driven straight and securely set. All welds shall be clean and free from rust, scale, corrosion, oil, water, and other matter. Welds shall be sound, smooth and free from pits and flashes.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects in table I and for compliance with 4.4.3.2.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.4 Examination.-

4.4.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested and inspected in accordance with all the requirements of referenced specifications, drawings and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.4.1.1 Testing for moisture content of wood.- Moisture content of wood requirement in 3.2.9 shall be determined in accordance with American Society for Testing and Materials Standard D 2016-62 at time of assembly, except when testing is performed by the electric moisture method, three determinations shall be made of the moisture content of the sample unit. The lot shall be all machined components prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one piece of wood. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0, expressed in defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 4.4.2 Process inspection.- Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations are accomplished as specified. Whenever nonconformance is noted, correction shall be made to affected items and process.

Required operation	Requirement paragraph
Aluminum frame prepared for painting as specified.	3.4.1
Steel hardware given an electro-deposited zinc or cadmium finish.	3.4.2
No lubrication of polyester thread.	3.3.2.5
All exterior surfaces given a coat of primer.	3.4.3

* 4.4.3 End item inspection.- The lot shall consist of all completely fabricated cases offered for inspection at one time. The sample unit shall be one completely fabricated case.

* 4.4.3.1 Visual examination.- The completely fabricated case shall be examined for defects in table I. The inspection level shall be level II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in defects per hundred units.

* TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not enameled or not specified color	X	
	Area of no film or thin film		X
	Peeled, gritty, tacky, blistered, sag or runs		X
	Indication of rust on steel components		X
Construction and workmanship	Component missing	X	
	Component fractured, split, or malformed	X	
	Not free of burrs, slivers or splinters	X	
	Component not fabricated or attached as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship (cont'd)	Rivets not securely set where specified		X
	Rivets excessively loose permitting improper movement of hinge when specified		X
	Screws, tacks or staples not securely set where specified		X
Welding	Welds not free from pits and flashes		X
	Welds not sound and smooth		X
Wood top and bottom	More than three pieces in each board when edge glued stock is used		X
	Shake, checks, warp, decays, loose knot or larvae channels		X
	More than two sound knot over 1/2 inch diameter or one sound knot over 3/4 inch diameter per square foot		X
	Holes greater than 1/16 inch diameter, or any holes not filled before finishing		X
Duck	Holes, cuts, or tears in duck	X	
	Color or duck not as specified	X	
	Mends, darns or patches in duck	X	
Seam and stitching	Wrong type of stitch		X
	Less than specified stitches per inch, or loose seam		X
	More than specified stitches per inch		X
	Any seam puckered or pleated		X
	Open seams more than 1 inch on stitch type 301		X
	Thread breaks overstitched less than 1 inch on type 301		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Seam and stitching (cont'd)	Thread breaks overstitched less than 3/4 inch type for type 304, 503, 504 or 505 (overedge stitching)		X
	Stitching ends less than 1 inch overstitched (except where ends are held down by other stitching or turned under in hem)		X
	Needle chews resulting in cut or tear larger than 1/8 inch in length, or hole larger than 1/8 inch diameter	X	
	Handstitching at end of tubes not as specified	X	
	Handstitching incomplete		X
	Bartacking missing or not as specified		X
Assembly	Cannot be fully opened or easily operated	X	
Identification marking	Missing, incomplete, illegible, wrong location		X

* 4.4.3.2 Dimensional examination.- Inspection shall be made of the completely fabricated mail distribution cases for compliance with specified dimensions of the drawings. Any dimension not within specified tolerances shall be classified as a defect. The inspection level shall be S-3 with an AQL of 6.5, expressed in defects per hundred units.

* 4.4.3.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing and marking as required by Section 5 of this specification are complied with. Defects shall be scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. *The inspection level shall be S-2 and the AQL shall be* 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

TABLE II.- Examination of preparation for delivery

Examination	Defect
Markings, exterior and interior	Missing, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of containers. Strapping missing or inadequate. Bulging or distortion of containers.

* 4.4.3.4 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, the examination for defects in closure, waterproofing, and strapping shall be made in accordance with that specification.

* 4.4.3.5 Examination for palletization.- An examination shall be made to determine that the palletization requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with table III. The sample unit shall be one palletized unit load fully prepared for delivery. The lot shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5, expressed in terms of defects per hundred units.

TABLE III.- Examination of palletization

Examination	Defect
Finished dimensions	Length, width, or height exceeding specified maximum requirements.
Palletization	Not as specified. Container pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A.- Each case shall be folded flat in the collapsed position as shown on Drawing 5-13-37. The suspension chain and eye bolts shall be securely tied or taped to the right side of the frame with cotton, sisal, jute cord, twine, or tape conforming to class 1 of PPP-T-60 or PPP-T-76, care being exercised to take up the slack to prevent movement while in transit.

* 5.1.2 Level C.- Cases shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

* 5.2 Packing.- Packing shall be Level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Each case, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to grade V2s, style FOL of PPP-B-636; or overseas type, style, type 2 load of PPP-B-601, as specified (see 6.2). Each shipping container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

* 5.2.2 Level B.- Each case, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to type CF (variety SW) or SF, class domestic, grade 275, style FOL of PPP-B-636. Each container shall be closed in accordance with method II as specified in the appendix of the box specification.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with the appendix thereto. The shipping container material may also be grade V4s of PPP-F-320.

* 5.2.3 Level C.- Cases shall be packed in a manner to insure safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

5.3 Palletization.- Unless otherwise specified (see 6.2), cases packed as specified, shall be palletized in accordance with load type I of MIL-STD-147, except that for overseas shipment the overall height of the load shall not exceed 43 inches. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Container patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the container patterns specified in MIL-STD-147, any container pattern may be used provided approval is obtained from the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use.- The portable mail distribution case covered by this specification consists of a series of small open compartments used in sorting mail for field use.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article.- When preproduction sample is required (see 3.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When V-board containers are required for level B shipment (see 5.2.2.1).
(e) Type shipping container required (see 5.2.1).
(f) When palletization is not required (see 5.3).

6.3 For access to a standard shade sample of cloth, cotton, duck and a standard sample of thread, address the procuring office issuing the invitation for bids.

* 6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL

Air Force - 84

Review activities:


Air Force - 84, 85

Preparing activity:


Army - GL

Project No. 7110-0078


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

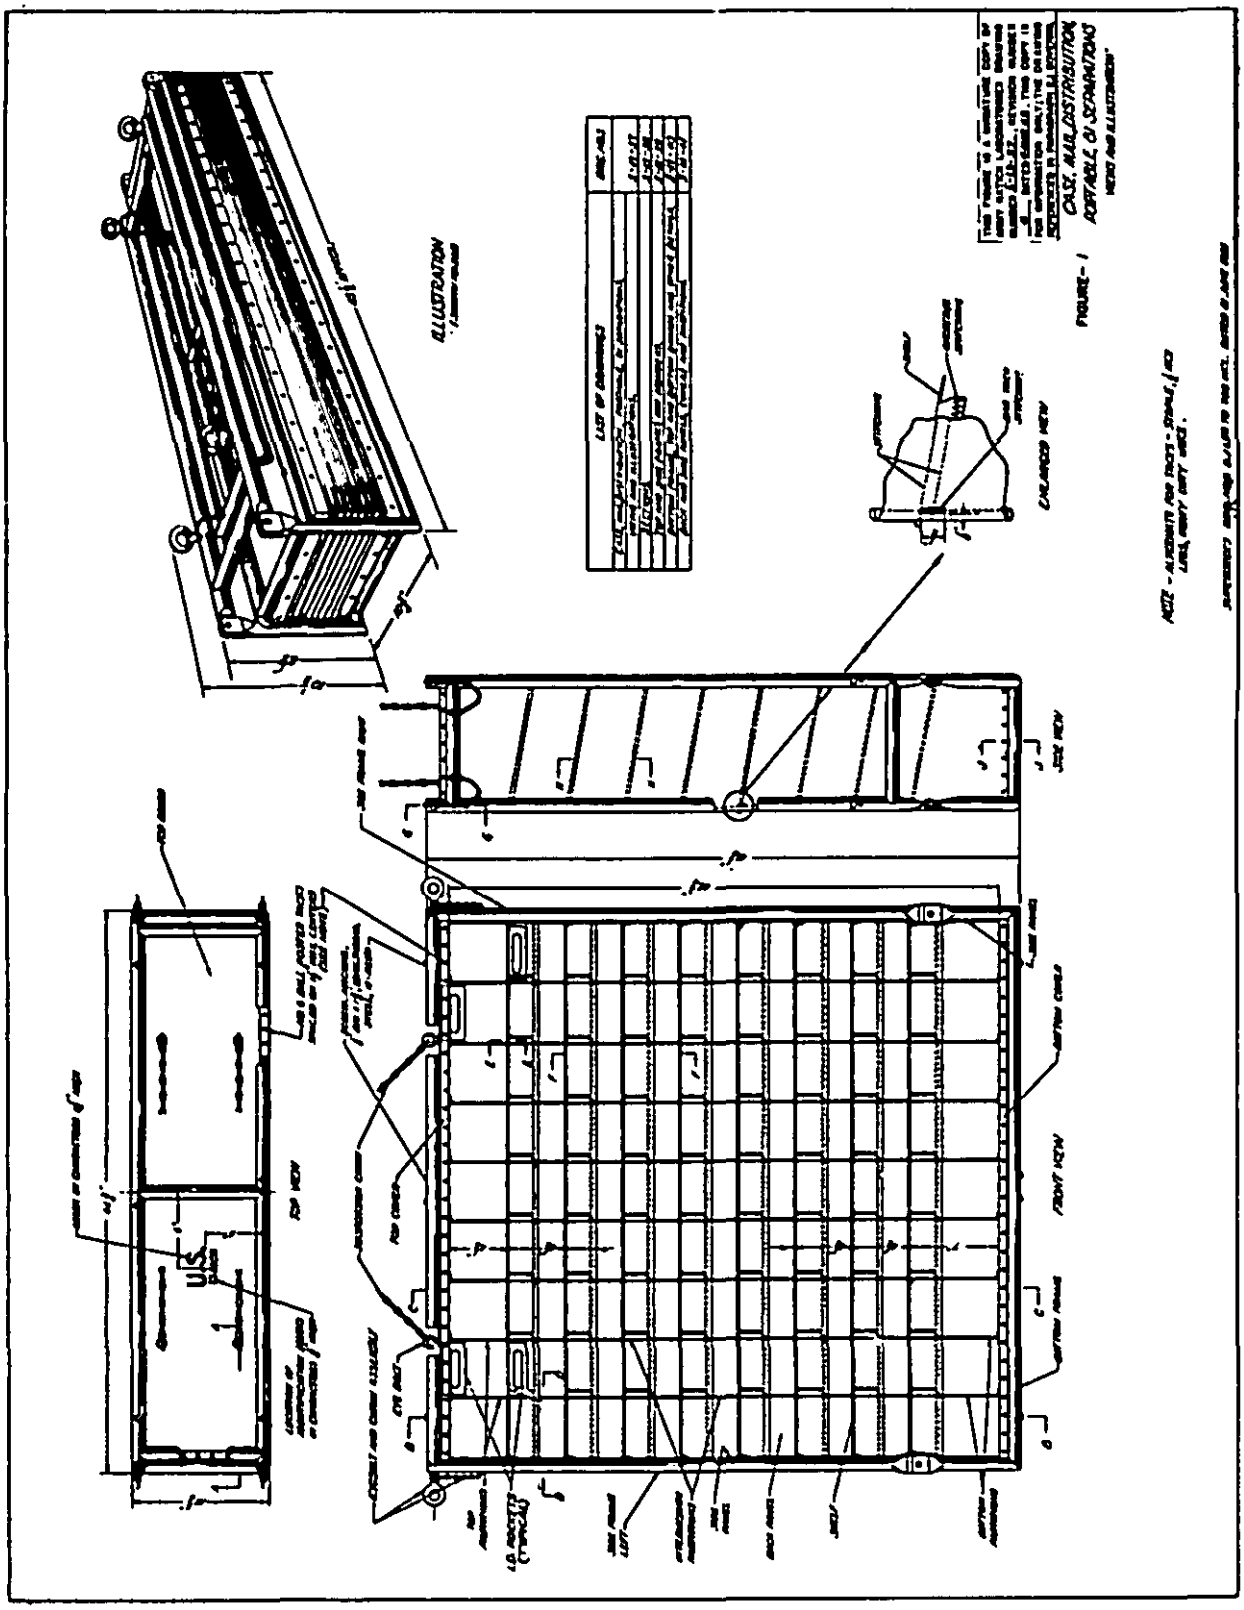


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

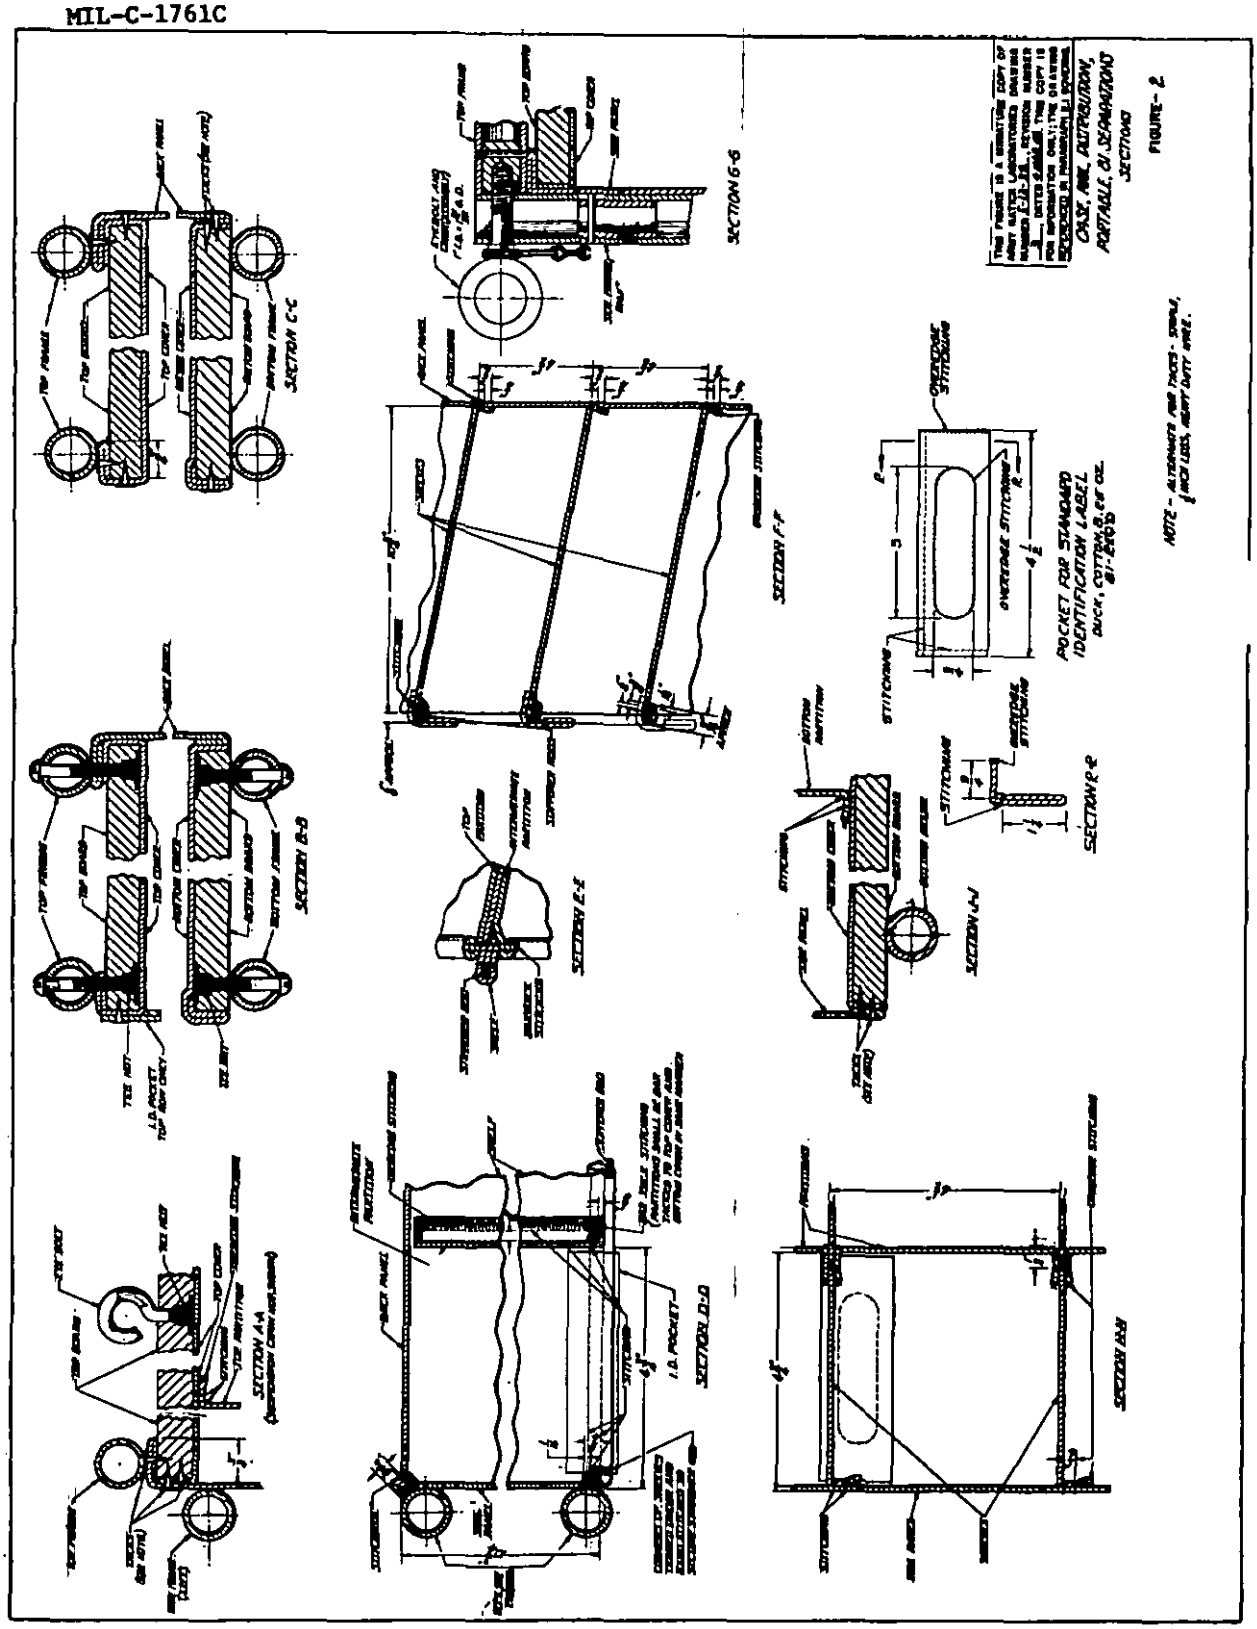

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

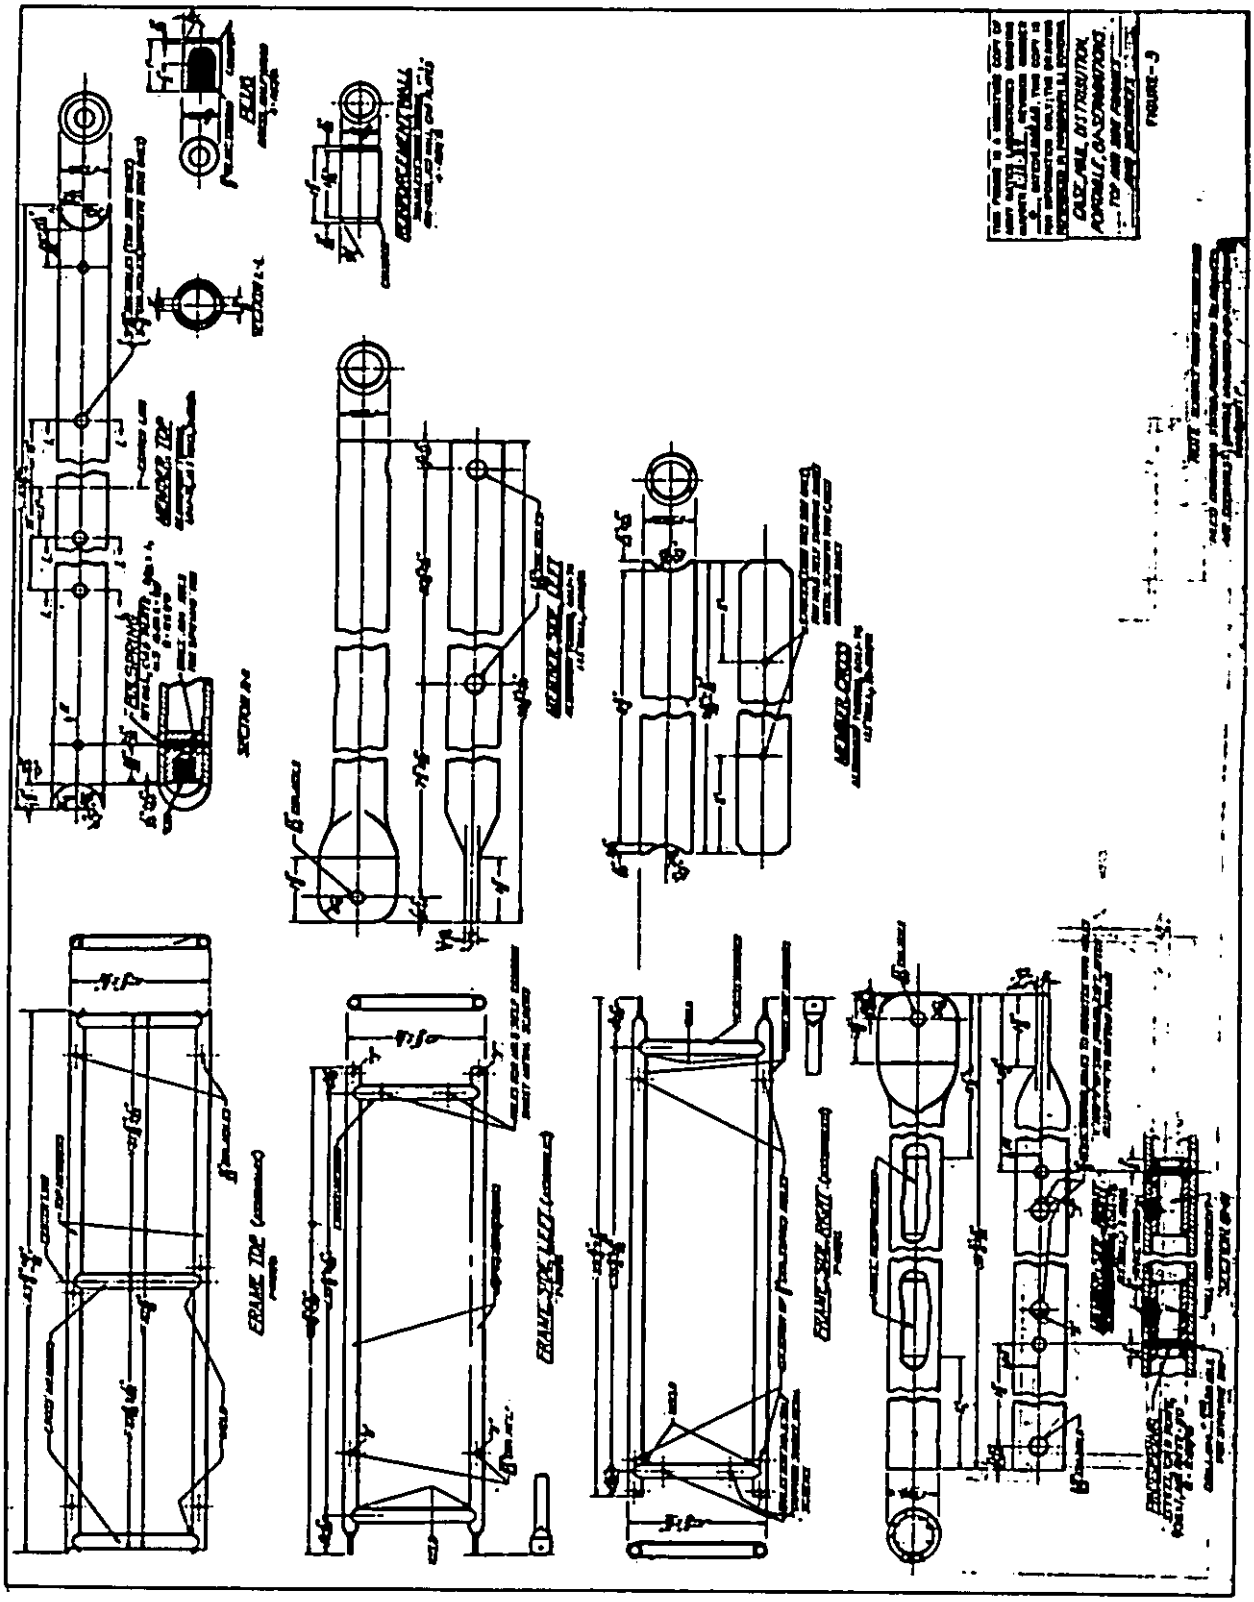

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

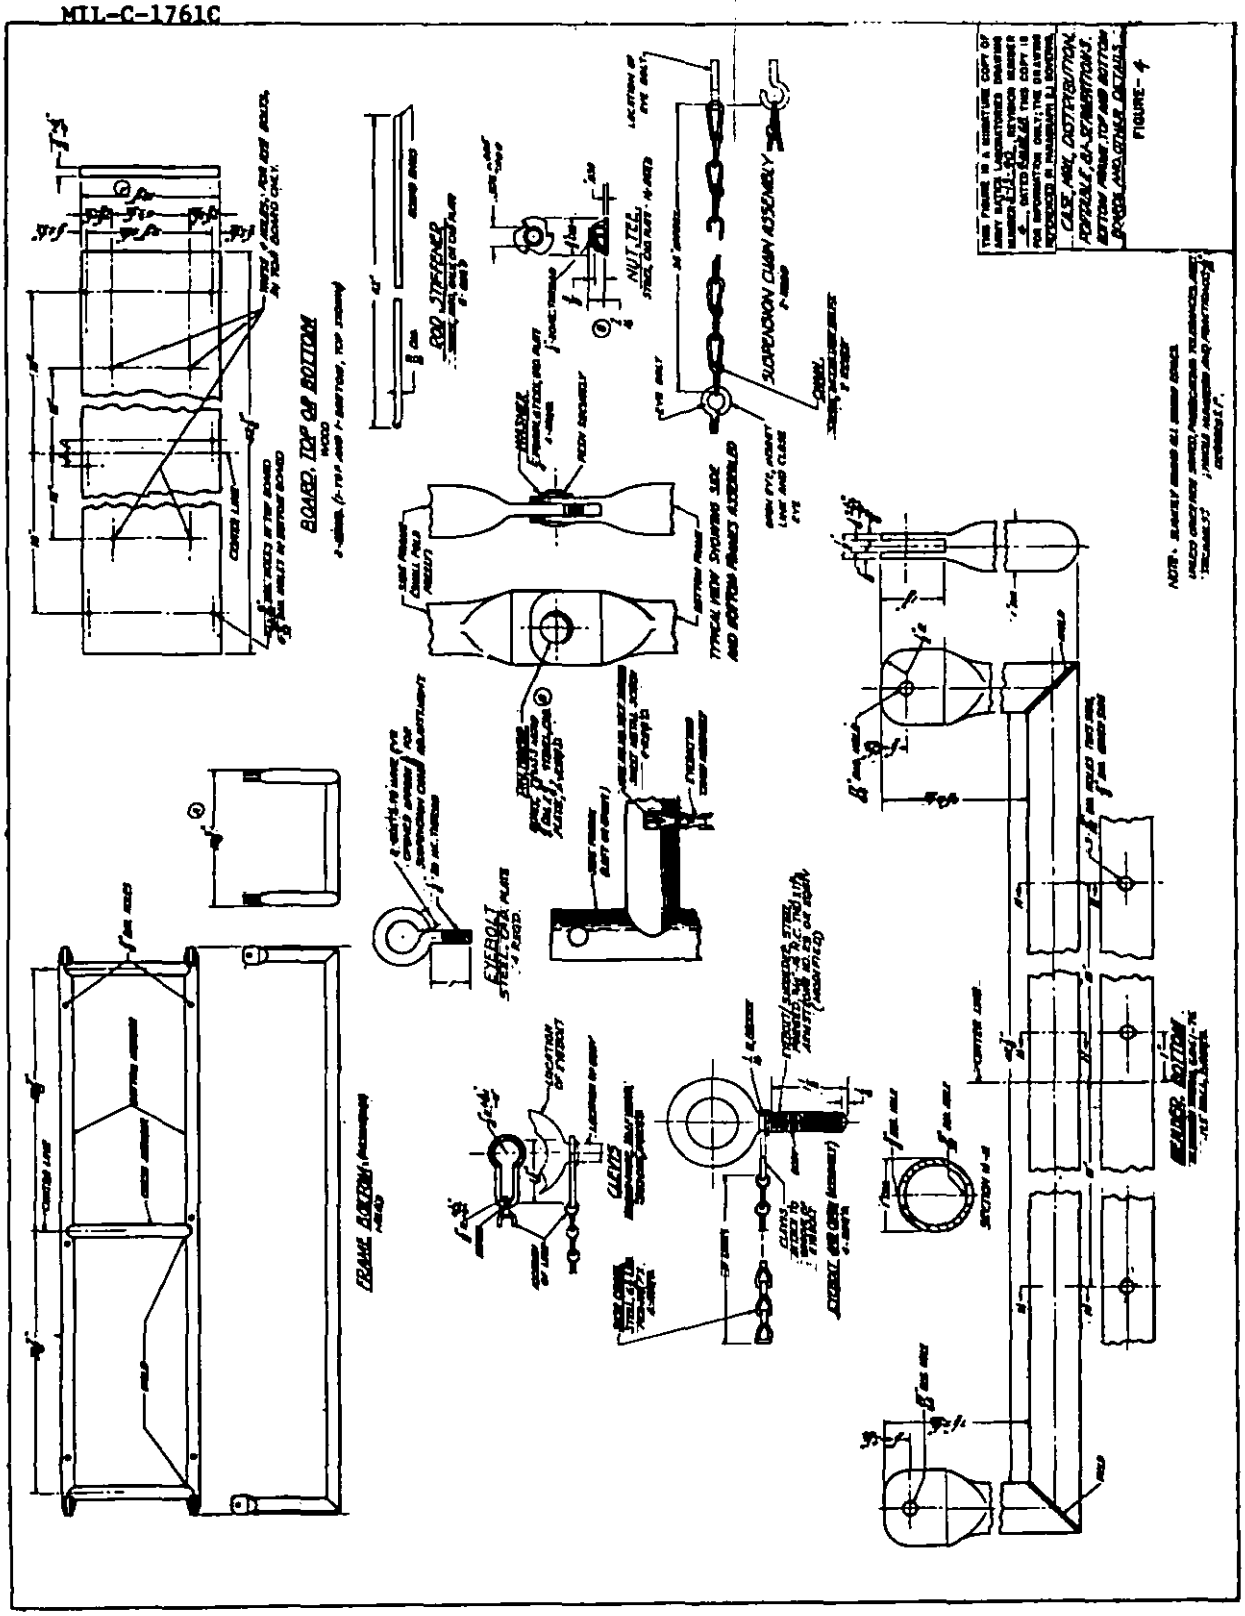

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

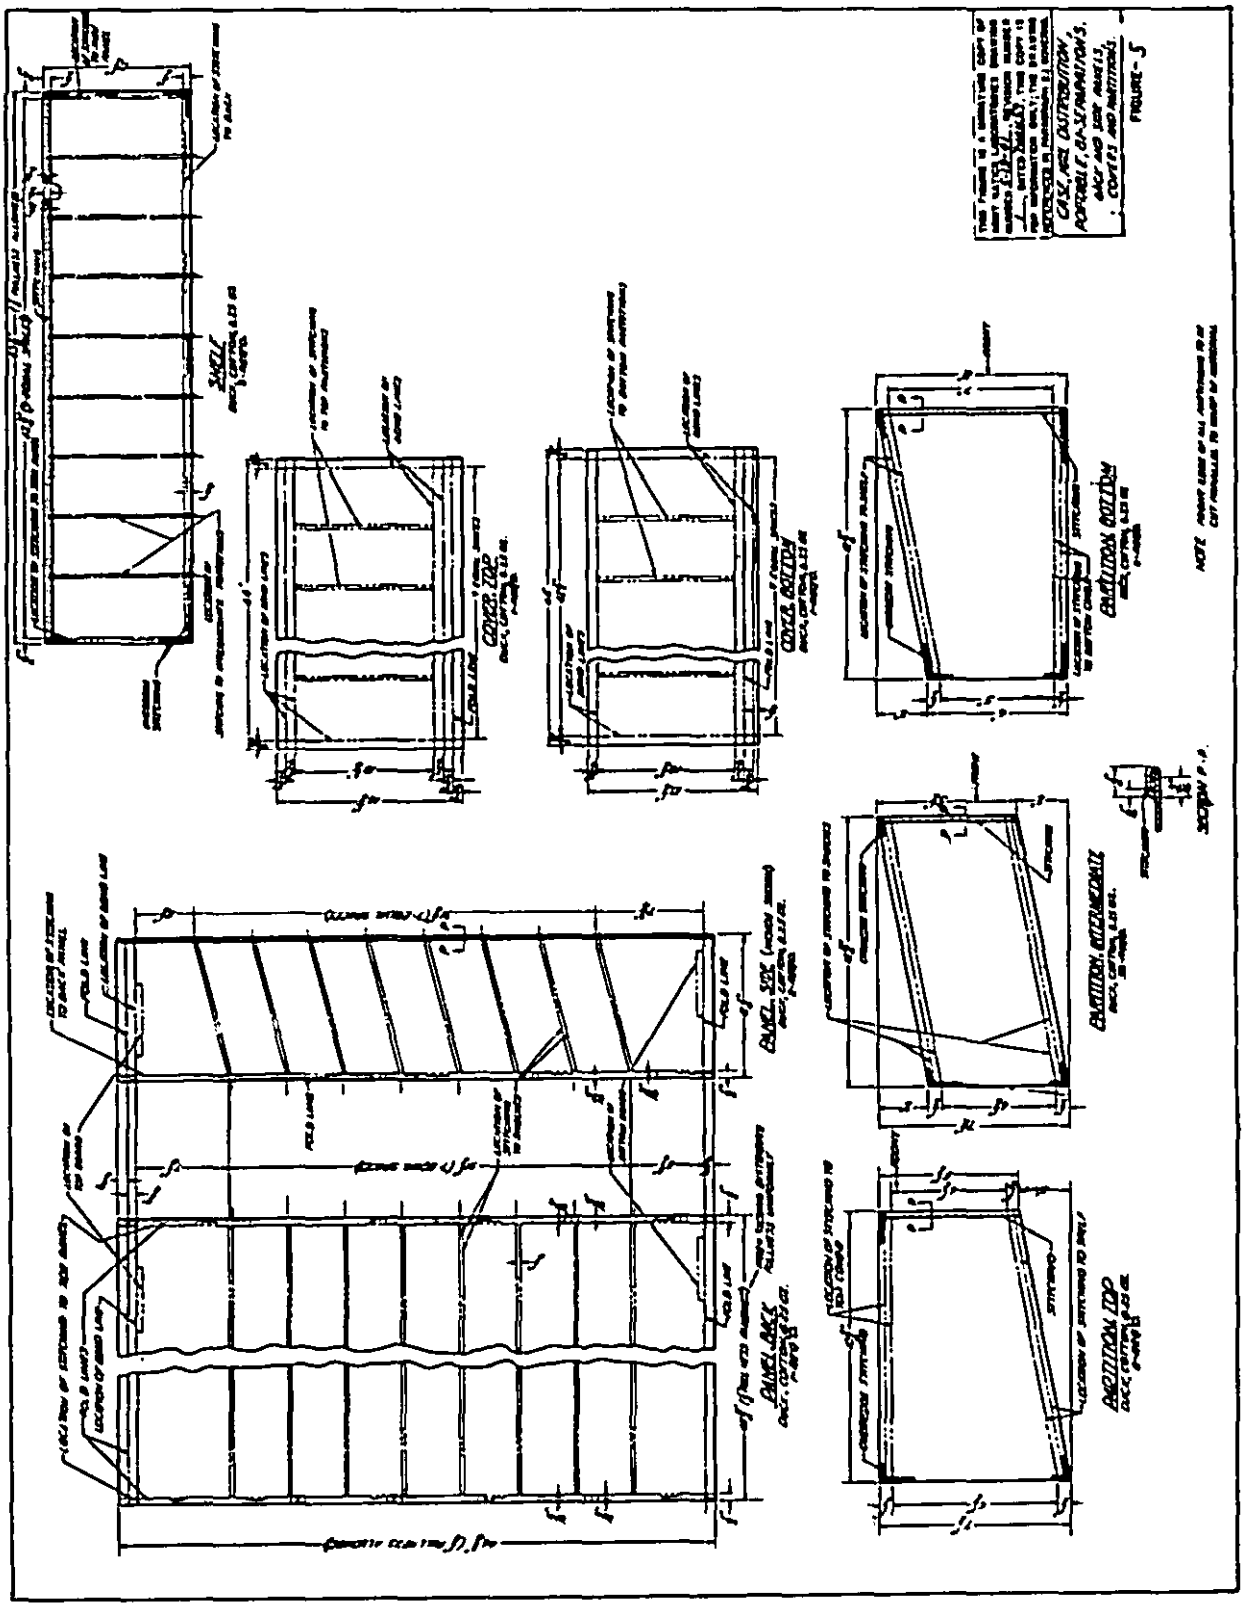


FIGURE 5 - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:43Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Case, Mail Distribution, Portable, 81 Separations - MIL-C-1761C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:43Z
Check the source to verify that this is the current version before use.