MIL-D-1769E

10 July 1968

SUPERSEDING
MIL-D-1769D
23 September 1966

MILITARY SPECIFICATION

DESK, MAIL DISTRIBUTION, WOOD, PORTABLE

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size mail distribution desk.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

* SPECIFICATIONS

FEDERAL

QQ-S-698 - Steel, Sheet and Strip, Low-Carbon

QQ-S-781 - Steel Strapping, Flat

TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings

TT-E-529 - Enamel, Alkyd, Semi-Gloss

TT-P-636 - Primer Coating, Synthetic, Wood and Ferrous Metal

MMM-A-100 - Adhesive, Animal - Glue

MMM-A-181 - Adhesive, Phenol, Resorcinol, or Melamine Base

MMM-A-193 - Adhesive, Vinyl, Acetate Resin Emulsion

PPP-B-636 - Box, Fiberboard

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

PPP-C-650 - Crates, Wood, Open and Covered

PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes

PPP-T-60 - Tape, Pressure-Sensitive Adhesive, Waterproof, For Packaging

MILITARY

MIL-F-495 - Finish, Chemical Black for Copper Alloys

MIL-C-496 - Clips, End, Strap

MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or In Colors

MIL-B-543 - Buckles, Tongueless and Web Strap

MIL-F-10336 - Fiber Sheet, Vulcanized

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

MIL-STD-129 - Marking for Shipment and Storage

MIL-STD-130 - Identification Marking of U. S. Military Property

MS 35647-3 - Padlocks, Key Operated

DRAWINGS

ARMY NATICK LABORATORIES

5-13-650 - Desk, Mail Distribution, Wood, Portable; Assembly and Illustration

5-13-651 - Desk, Mail Distribution, Wood, Portable; Sections

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

5-13-652 - Desk, Mail Distribution, Wood, Portable: Body and Lid, Hardware and Strap Details

5-13-653 - Desk, Mail Distribution, Wood, Portable; Leg Assembly and Details

(Miniature copies of Drawings 5-13-650 through 5-13-653, identified as figures 1 through 4 respectively, are attached for information purposes only.)

* (Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 2016-62- Standard Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

UNITED STATES DEPARTMENT OF COMMERCE COMMERCIAL STANDARDS

Commercial Standard CS 35-61- Hardwood Plywood

U. S. Product Standard PS 1-66- Softwood, Plywood Construction and Industrial

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced, a preproduction sample consisting of a finished desk covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production mail distribution desk.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 3.2 Materials.- Materials not definitely specified shall be of the quality normally used for the purpose by the manufacturer in his current commercial practice.

* 3.2.1 Steel, sheet and strip, low carbon.- The steel sheet and strip shall be low carbon, cold rolled, any temper, quality, finish or edge, as applicable, conforming to 1008-1020 of QQ-S-698.

* 3.2.2 Wood.-

* 3.2.2.1 Plywood.- The plywood for the desk body and lid shall be either soft wood, group 1, exterior type, grade B-C or better, sanded two sides, conforming to Product Standard PS 1-66, or hardwood, type I, grade 2, face and back veneer, regular sanded, conforming to Commercial Standard CS 35-61.

* 3.2.2.2 Solid.- The solid wood shall be without honeycombing or case-hardening and shall be uniformly kiln-dried. The moisture content at time of assembly shall be from 5 to 9 percent when determined in accordance with 4.3.1.1. The lumber shall be free from decay, warp, knots, holes, shakes, splits or waves. Small burls, medium stain, mineral streaks not exceeding 1/8 by 2 inches in area and occurring not more than one per square foot average, will be permitted. The slope (divergence) of grain on any component, determined in accordance with 4.4.1, shall not exceed 1 inch in 10 inches on any one surface when accompanied by straight grain on the adjacent surface. The solid wood shall be any of the following species:

Ash	Hickory
Maple, Sugar or Black (hard)	Birch (sweet or yellow)
Elm, rock	Beech
	Oak (red or white)

* 3.2.3 Fiber, vulcanized.- The vulcanized fiber shall conform to MIL-F-10336. The thickness shall be as specified on Drawing 5-13-650.

* 3.2.4 Adhesives.-

* 3.2.4.1 Room, intermediate, and high temperature setting.- Room, intermediate, and high temperature setting adhesive shall conform to type I, II, or III, class 1 of MMM-A-181; or the adhesive may be of a thermo-setting vinyl emulsion type which meets the shear strength by compression loading, plywood shear strength, both wet and dry, and pH requirements of MMM-A-181.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

3.2.4.2 Animal-Glue.- Animal-glue adhesive shall conform to type I, grade J-2 or better, or type II of MMM-A-100.

* 3.2.4.3 Vinyl acetate resin emulsion.- Vinyl acetate resin emulsion adhesive shall conform to MMM-A-193.

* 3.2.5 Buckles, tongueless, and web strap.- The buckle shall conform to type II, style 4, class 3, size 1 inch of MIL-B-543.

3.2.6 Clips, end, strap.- The end clip shall conform to type 1, class 2, size 1 inch of MIL-C-496.

* 3.2.7 Webbing.- The cotton webbing shall conform to type III, class 4, 1-inch width of MIL-W-530. The color shall be olive drab No. 7.

* 3.2.8 Primer.- Primer shall conform to TT-P-636.

* 3.2.9 Enamel.- Enamel shall conform to TT-E-529. The color shall be olive drab No. X24087 or Federal Standard No. 595.

* 3.2.10 Hardware.- The draw bolts with hooks, safety hasp with staple, hinges, chest handles, quarter circles, bumpers, and partition brackets shall be commercial items, made of steel, and shall conform in design to the components shown on Drawings 5-13-650 and 5-13-651.

* 3.2.11 Rivets.- Except for the rivets on the leg securing strap, all rivets shall be commercial items, steel, 5/32-inch body diameter, of the type and head style shown on applicable drawings. The lengths shall be sufficient to provide a minimum of 1/8-inch clinch for the split rivets and 1/16-inch clinch for the tubular and solid rivets.

* 3.2.11.1 Rivets, strap.- The rivets and caps for the leg securing strap shall be brass in accordance with the manufacturer's commercial practice.

* 3.2.12 Trunk tacks.- The tacks shall be commercial items, steel, size No. 8, and shall be of sufficient length to provide a minimum of 1/8-inch clinch.

* 3.2.13 Washers.- The washers shall be commercial items, steel, and shall be the proper size and type as recommended by the rivet industry.

* 3.2.14 Nails.- Nails shall be commercial items, steel, three penny, common, cement coated box nails.

* 3.3 Design and construction.- The desk, components, and assemblies shall conform to the design, details and dimensions specified on Drawing Nos. 5-13-650, 5-13-651, 5-13-652, and 5-13-653, and to the requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 3.3.1 Plywood panels.- The plywood panels shall be fabricated from material specified in 3.2.2.1. Vulcanized fiber conforming to 3.2.3 shall be bonded to both surfaces of the panels with not more than one piece on any panel. The fiber shall be tightly drawn and brought flush with the edges of the panels, making a smooth surface free from waves or irregularities. Bonding shall conform to 3.3.1.1 or 3.3.1.2.

* 3.3.1.1 Unit bonding process.- The vulcanized fiber and wood veneers shall be bonded with adhesive specified in 3.2.4.1, assembled, pressed, and cured in one operation.

* 3.3.1.2 Two step bonding process.- The vulcanized fiber shall be bonded to the plywood with adhesive specified in 3.2.4.1.

* 3.3.1.3 Application of adhesive.- The adhesive shall be applied in the manner recommended by the manufacturer. Pressure, pressing time, assembly periods, and curing temperature shall conform to the recommendations of the adhesive manufacturer.

* 3.3.1.4 Resistance to delamination.- There shall be no delamination or weakness of bond in glue line when tested as specified in 4.4.2.1, and 4.4.2.2.

* 3.3.1.5 Fiber adhesion.- The adhesive bond of the fiber to plywood shall have a fiber failure of 90 percent minimum, and minimum 95 percent average of the bonded area when tested as specified in 4.4.2.3.

3.3.1.6 Rivets and trunk tacks.-

3.3.1.6.1 Surface preparation of rivets and trunk tacks.- Prior to the driving of the rivets and trunk tacks, surfaces of the rivets and trunk tacks shall be clean and free of oil, dirt, grease, paraffin or other lubricant, rust or foreign matter.

* 3.3.1.6.2 Driving of rivets and trunk tacks.- Holes for rivets shall be drilled through fiber and plywood and shall be no larger than the diameter of the rivet. Rivet holes in the hardware shall provide a clearance of 0.015 inch maximum. All rivets and trunk tacks shall be driven with head flush against hardware, binding or fiber, as applicable, and shall be clinched or peened to provide smooth interior surfaces.

* 3.3.1.7 Gluing and nailing.- All joints of the desk panels shall be glued with the adhesive specified in 3.2.4.1, and nailed as specified on Drawing No. 5-13-651.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 3.3.1.8 Shelves and partitions.- All exposed edges of each finished panel of shelves and of removable and stationary partitions shall be sanded to a smooth surface. All joints of shelves and stationary wood partitions shall be glued in place with the adhesive specified in 3.2.4.2 or 3.2.4.3. Application of adhesive shall conform to 3.3.1.3.

* 3.3.1.9 Removable partitions.- Removable partitions shall fit in place without binding and shall be flush at the body edge.

* 3.3.1.10 Metal binding and valance.- The metal binding and valance shall be fabricated from the material specified in 3.2.1.

* 3.3.1.11 Fiber binding.- The fiber binding shall be fabricated from the material specified in 3.2.3.

* 3.3.1.12 Padlock.- The desk shall be furnished with a padlock, size 1-1/2, with clevis and chain, conforming to MS 35647-3, except that the length of chain shall be 7-1/2-inches with a metal clevis on the free end of the chain for fastening by means of rivets. The two keys shall be secured to the padlock with a wire ring 1/2-inch in diameter by 0.060 inch thick.

* 3.3.1.13 Strap, leg securing.- The strap shall be made of the webbing specified in 3.2.7. The end clips shall be as specified in 3.2.6. The buckle shall be as specified in 3.2.5.

* 3.3.1.13.1 Setting of end clips.- One end of the webbing shall be inserted the full depth of the end clip. The end clip shall be securely attached without cutting or fraying the webbing, and shall be flat and of the same thickness and width as the webbing.

* 3.3.1.14 Legs.- All exposed edges of the legs shall be sanded to a smooth surface.

3.4 Finish.-

* 3.4.1 Preparation of surfaces.-

* 3.4.1.1 Metal surfaces.- All unfinished hardware and metal surfaces, except rivets, trunk tacks, washers, caps and nails shall be pretreated in accordance with Type I or Type II of TT-C-490.

* 3.4.1.2 Wood and fiber surfaces.- All wood and vulcanized fiber surfaces shall be thoroughly cleaned of dust, dirt, and grease prior to priming specified in 3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 3.4.2 Priming.- The thoroughly dried surfaces, prepared as specified in 3.4.1, shall be coated with the primer specified in 3.2.8. All hardware (except rivets, burrs, caps and trunk tacks), metal and fiber components shall be primed on all surfaces and edges prior to assembly. Desk body, lid, partitions and legs shall be primed prior to assembly of hardware and bindings. The primer shall be thoroughly dry prior to assembly of the hardware, metal and fiber parts.

* 3.4.3 Enameling.- After attachment of all hardware, metal and fiber parts to the primed desk body, lid and legs (excluding the leg securing straps), the exterior and interior surfaces of the desk body and lid shall be coated with enamel specified in 3.2.9.

* 3.5 Marking for identification.- Identification marking shall be in accordance with MIL-STD-130 and as shown on Drawing 5-13-650.

* 3.6 Workmanship.- All surfaces of the finished desk shall be free of burrs, slivers, and rough or sharp edges. Components shall not be broken, cracked, split or malformed. The enamel coating shall level out to a continuous, smooth, dry adherent film thickness without runs, drops, streaks, or area of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking or blistering.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects listed in table III, and dimensions specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.1.1 Testing for moisture content of wood.- Moisture content of wood requirement in 3.2.2.2 shall be determined in accordance with ASTM-D 2016-62 at time of assembly, except when testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit. The lot shall be all machined components prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one piece of wood. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0, expressed in terms of defects per hundred units.

4.3.1.2 Testing for slope of wood grain.- The slope of wood grain requirement specified in 3.2.2.2 shall be determined in accordance with 4.4.1. The lot shall be all the solid wood components offered for inspection at one time, prior to assembly. The sample unit shall be one solid wood component. The inspection level shall be S-1 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.1.3 In process examination.- Examination shall be made during the manufacturing process for requirements specified in table I. Whenever nonconformance is noted, correction shall be made to affected items in process.

TABLE I.- In process examination

Requirement	Requirement paragraph
Surface preparation of rivets, trunk tacks and washers	3.3.1.6.1
Diameter of rivet holes and rivet clinching length	3.2.11 and 3.3.1.6.2
Preparation of surfaces for finish	
Metal	3.4.1.1
Wood and fiber	3.4.1.2
Priming	3.4.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 4.3.2 Testing of intermediate product.-

* 4.3.2.1 Testing of vulcanized fiber to plywood bond.- Prior to painting, the panels shall be tested for fiber adherence to plywood. The sample unit shall be one plywood panel with fiber bonded to both sides. The lot shall be all of the panels glued and bonded under the same process and control, offered for inspection at one time. Three sample units shall be selected from each lot. Two test specimens conforming to 4.4.2.1 shall be cut from each sample unit and tested as specified in 4.4.2.2. and 4.4.2.3. Any nonconformance shall be cause for rejection of the lot.

* 4.3.3. Intermediate inspection.- Inspection shall be made of the desks for defects in table II. The sample unit shall be one desk, prior to application of finish. The inspection level shall be II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Visual intermediate inspection

Examine	Defects	Classification Major	Minor
Wood and plywood	Decay, warp, knots, holes, shakes, splits or waves	X	
	Burls, stains, mineral streaks in excess of those permitted		X
	Fiber covered panel not smooth or free from waves or irregularities		X
	More than one sheet of fiber on each panel		X

* 4.3.4 End item inspection.- The lot shall be all the assembled desks offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated desk.

* 4.3.4.1 Visual examination.- Examination shall be made of the end item for defects in table III. The inspection level shall be II with and (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

TABLE III.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not uniform color	X	
	Not color enamel specified		X
	Area of no film	X	
	Not smooth, continuous or adherent		X
	Has runs, drops or streaks	X	
	Evidence of peeling, flaking or blistering	X	
	Imbedded foreign matter	X	
Construction and workmanship	Any component missing	X	
Wood and plywood	Components broken, cracked, split or malformed	X	
	Burrs, slivers, rough or sharp edges	X	
Attachment of hardware	Mating hardware not aligned		X
	Not attached as shown on applicable drawings		X
Attachment of rivets	Any rivet missing		X
	Not head specified		X
	Rivet not peened or curled		X
	Rivets not completely seated	X	
	Rivet head missing		X
	Any rivet reversed, e.g., head is not on the intended side of component as required	X	
Attachment of valances and bindings	Not riveted tightly to edges		X
	Ends visible after hardware attachment		X
	More than two on any edge	X	
	Loose when drawbolt is engaged		X
Desk lid	Hinge binds		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

TABLE III.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship (cont'd)			
Desk body	Hasp and staple will not engage	X	
	Drawbolt and hook will not engage	X	
	Not provided with four bumpers		X
Chest handle	Binds or cannot be moved into carrying position, or will not fold down when not in use		X
Partition, stationary	Loose, not glued in slot, edge not rounded smooth, or not flush with body edge		X
Partition, removable	Binds, too loose, or not flush at body edge		X
Strap assembly	Webbing frayed or cut		X
	Not attached with two clips	X	
Leg assembly	Legs bind or will not close	X	
	Does not fold as specified	X	
	Hinge binds		X
Padlock and keys	Padlock missing	X	
	Padlock will not function	X	
	Two keys missing	X	
	One key missing		X
Identification marking	Missing, illegible, incorrect, wrong location, or not as specified		X

* 4.3.4.2 Dimensional examination.- Examination shall be made of the desk for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 4.3.5 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking requirements of Section 5 of this specification are complied with. Defects shall be as indicated in table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE IV.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing or damaged
Workmanship	Inadequate application of components, such as bulging or distortion of containers, and blocking and bracing inadequate or improperly affixed

* 4.3.5.1 Examination of shipping containers.- Examination for defects in closure and strapping of shipping containers shall be in accordance with the appendix of the applicable container specification.

* 4.4 Tests.-

* 4.4.1 Slope of wood grain.- The slope of grain requirement in 3.2.2.2 shall be determined by combining the grain direction of two adjacent faces of a square or rectangular piece. When one of these faces is straight grained, the true slope of grain is shown on the other face. When there is a slope on both faces, the true or combined slope is greater than the slope on either face. Slope of grain is shown on edge-grained faces by summer-wood bands; by the direction in which a free-flowing ink or dye spreads; by the course taken by a narrow strip lifted by a knife point and torn out; or by the Teco or equal slope-grain detector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

* 4.4.2 Vulcanized fiber to plywood bond.-

* 4.4.2.1 Test specimens.- The test specimens shall be 4 inch square plywood panels having fiber bonded to both sides. The specimens shall be untreated and unpainted.

* 4.4.2.2 Boiling and quench test.- The test specimens conforming to 4.4.1.1 shall be immersed in boiling water for three hours, followed by quenching in water at room temperature ($70^{o}F$ plus or minus $5^{o}F$). The specimens shall be examined immediately after quenching to determine compliance with 3.3.1.4.

* 4.4.2.3 Fiber adhesion test.- Specimens conforming to 4.4.1.1 shall have a sharp knife blade or similar instrument inserted at the glue line and the vulcanized fiber shall be peeled off. The percentage of fiber failure for each specimen shall be estimated and the average fiber failure for all specimens tested shall be computed to determine compliance with 3.3.1.5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.-

* 5.1.1.1 Preservation.- The key opening of each padlock shall be sealed with tape conforming to type IV or V, class 1 of PPP-T-60.

5.1.1.2 Packaging.- The two loose partitions in the bottom section of the desk shall be removed and placed flat in the center division of the bottom shelf. The legs shall be folded and secured in place in the bottom section of the shelf with web straps attached to the back of this section. The desk shall then be closed and locked, and the two keys securely attached to the padlock with the ring provided. The keys and the ring shall be spirally wound with tape specified herein in such a manner as to cover entirely the keys and ring. The ends of the tape shall be securely fastened to prevent unwinding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

5.1.2 Level C.- Desks shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Each desk, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC (end-opening), grade V2s of PPP-B-636. Pads fabricated from fiberboard conforming to grade W6c of PPP-F-320 shall be positioned between the desk and the inside surfaces of the fiberboard shipping container in a manner as to protect the lock, hasp, and the hinges of the desk. Alternatively, shipping containers may be used that conform to type II, style A of PPP-C-650, except that top and bottom members shall be 1- by 4-inch lumber. Blocking and bracing shall be used to provide clearance between the desk and the inside surfaces of the wood shipping container in a manner as to protect the lock, hasp, and hinges of the desk. The internal wood blocking and bracing shall not depend on end grain nailing alone. Supplemental supporting cleats shall be provided to reinforce the blocks and prevent splitting of the blocking and bracing. Each shipping container shall be closed and reinforced with steel strapping or tape banding in accordance with the appendix of the applicable container specification.

* 5.2.2 Level B.- Each desk, packaged as specified in 5.1, shall be packed in a nontest corrugated fiberboard protector in the form of a tube (two ends open). The tube shall run the long dimension of the desk. Each tube shall be strapped with two steel straps 5/8 inch by 0.020 inch, conforming to type I, class A of QQ-S-781. The straps shall be placed approximately 7 inches from each end.

* 5.2.2.1 When specified (see 6.2), weather-resistant fiberboard conforming to grade V3c, V3s or V4s of PPP-F-320 shall be used for the fiberboard tube.

5.2.3 Level C.- Desks, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or reulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The mail distribution desk covered by this specification is intended for use in handling mail in the field.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) First article.- When a preproduction sample is required (see 3.1).

(c) Selection of applicable levels of preservation, packaging, and packing (see 5.1 and 5.2).

* (d) When weather-resistant grade fiberboard is required for level B packing (see 5.2.2.1).

6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL

Air Force - 84

Review activity:

Air Force - 84

User activities:


Navy - MC, YD

Preparing activity:


Army - GL

Project No. 7110-0085

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

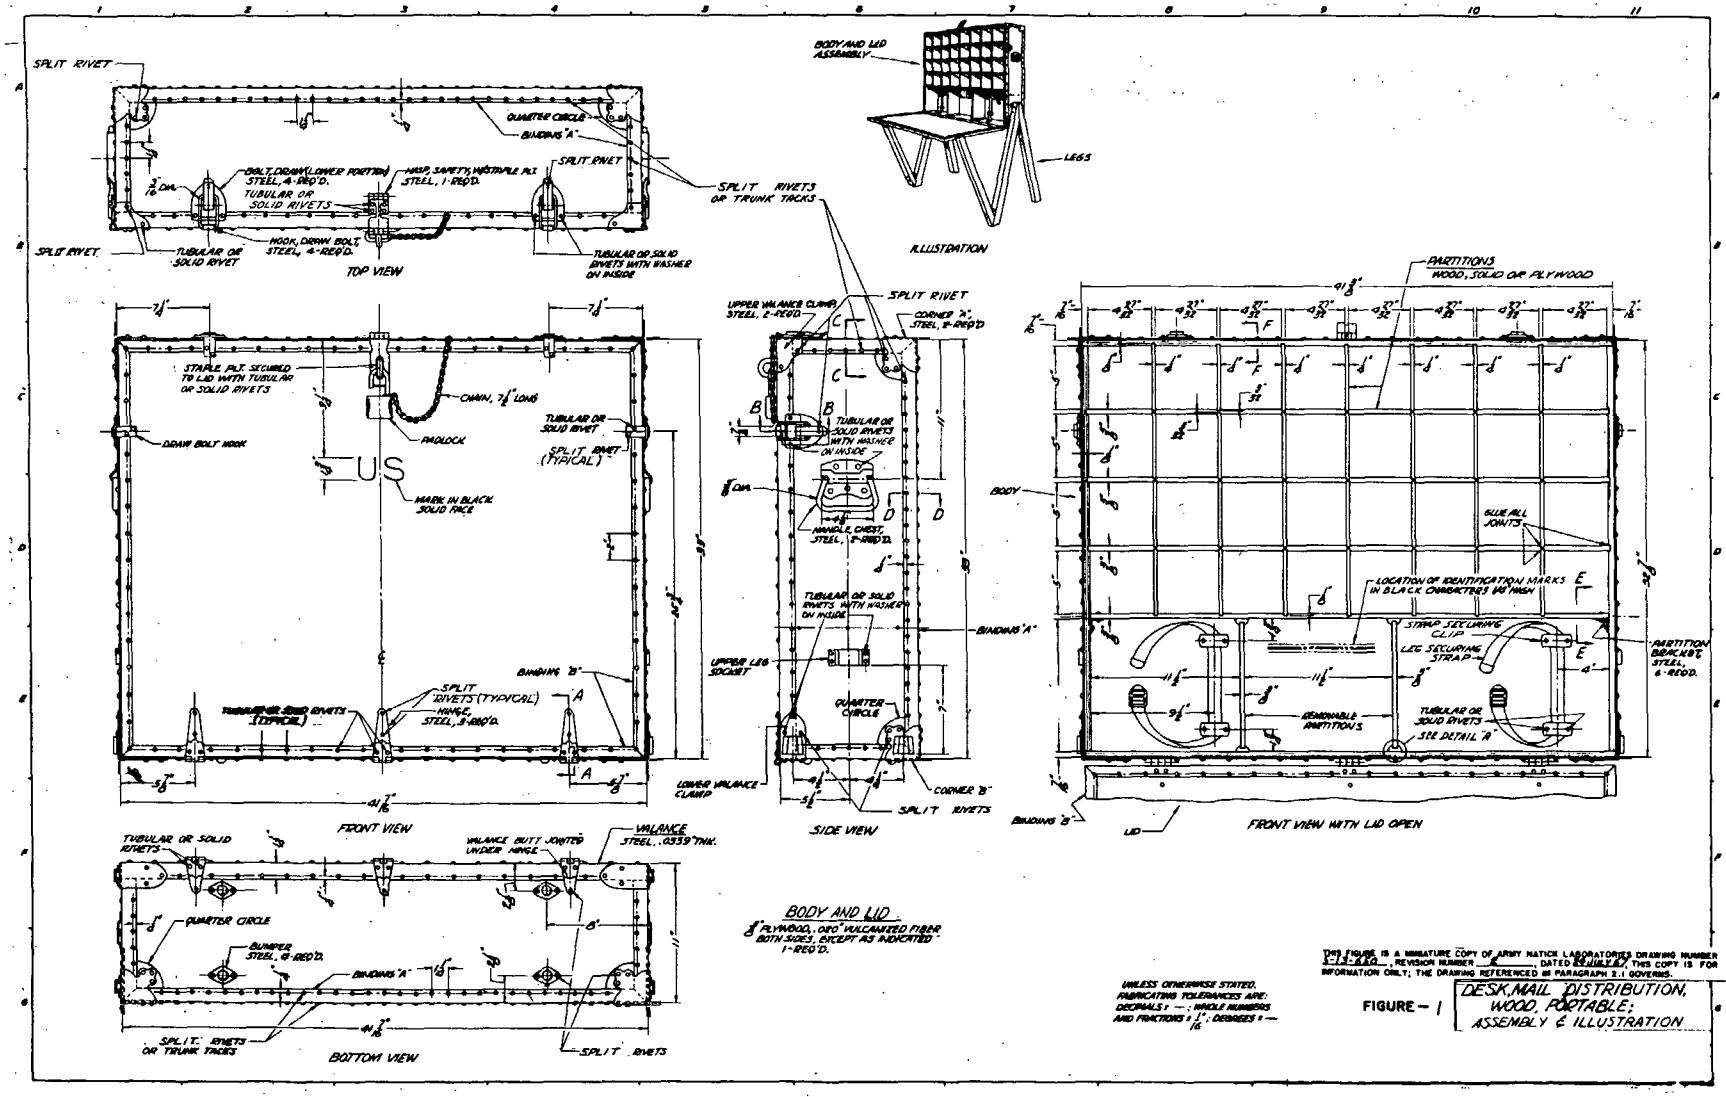

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

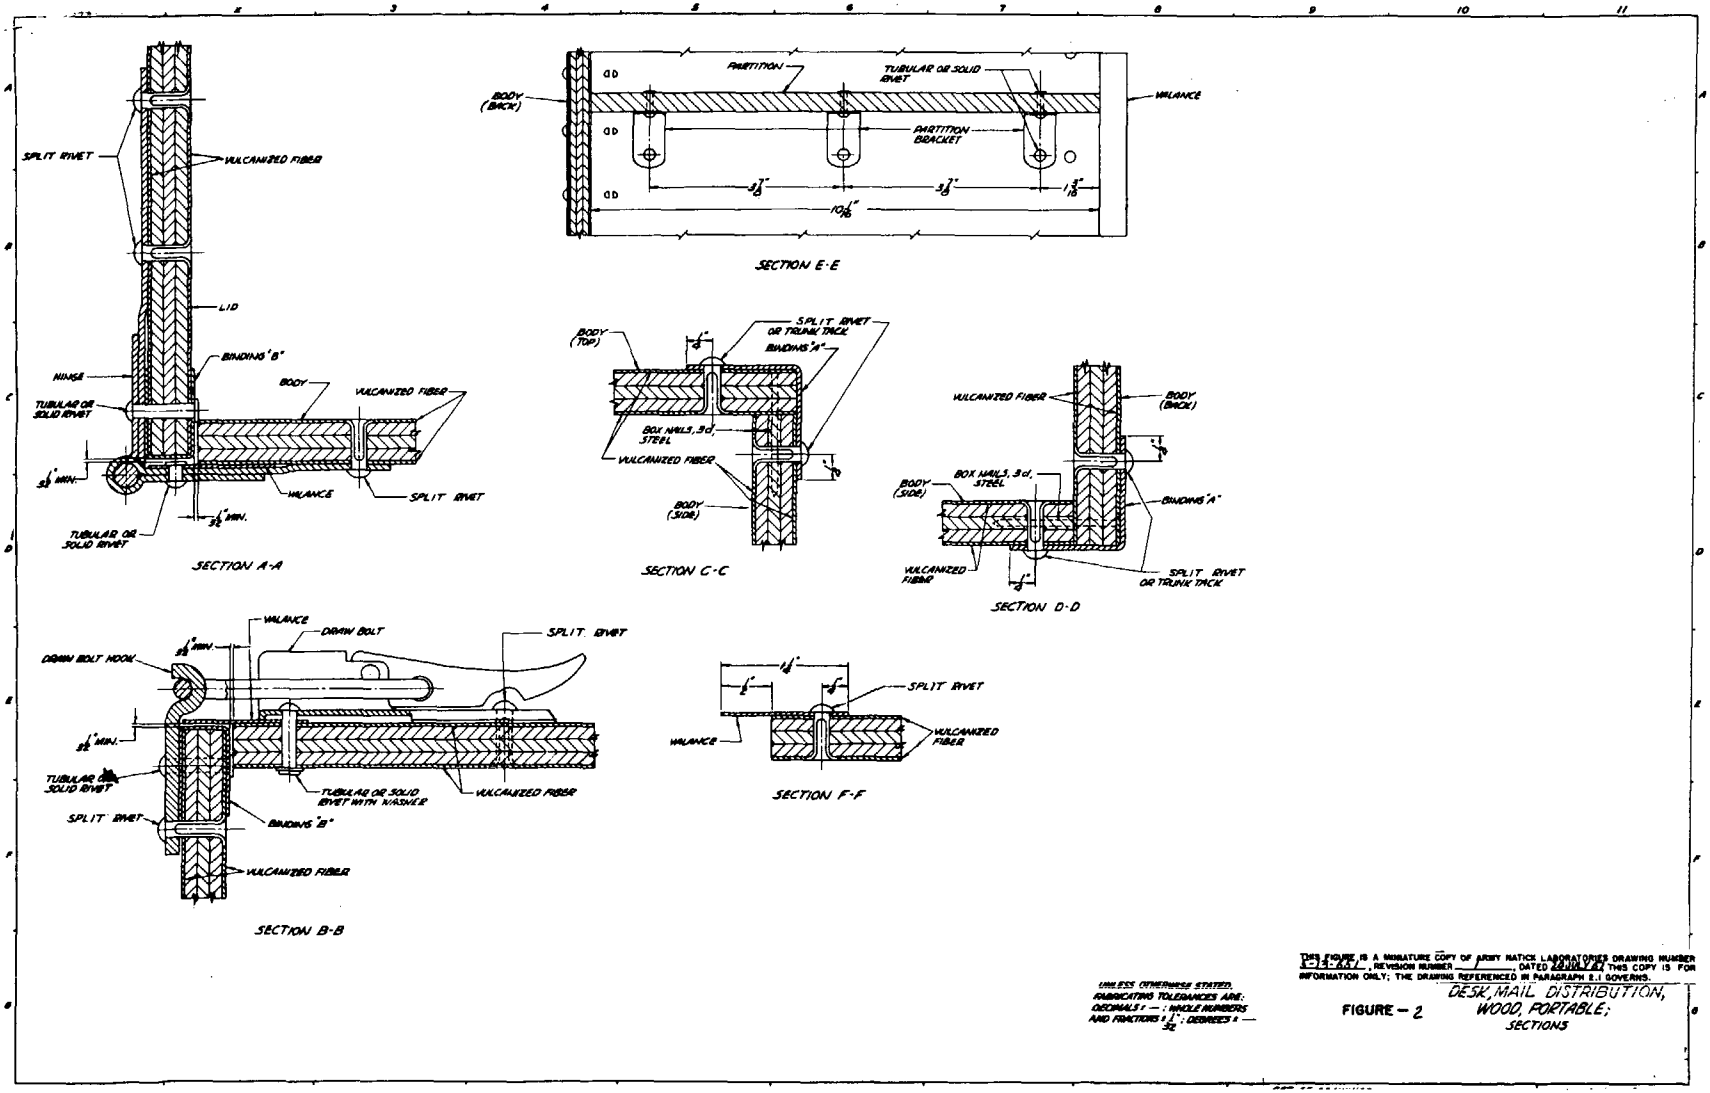


UNLESS OTHERWISE STATED, FABRICATING TOLERANCES ARE: DECIMALS ± —; WHOLE NUMBERS AND FRACTIONS ± 1/32"; DEGREES ± —

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER 8-5-A5/ , REVISION NUMBER — , DATED 22 JULY 47. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 8.1 GOVERNS.

FIGURE – 2 DESK, MAIL DISTRIBUTION, WOOD, PORTABLE; SECTIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

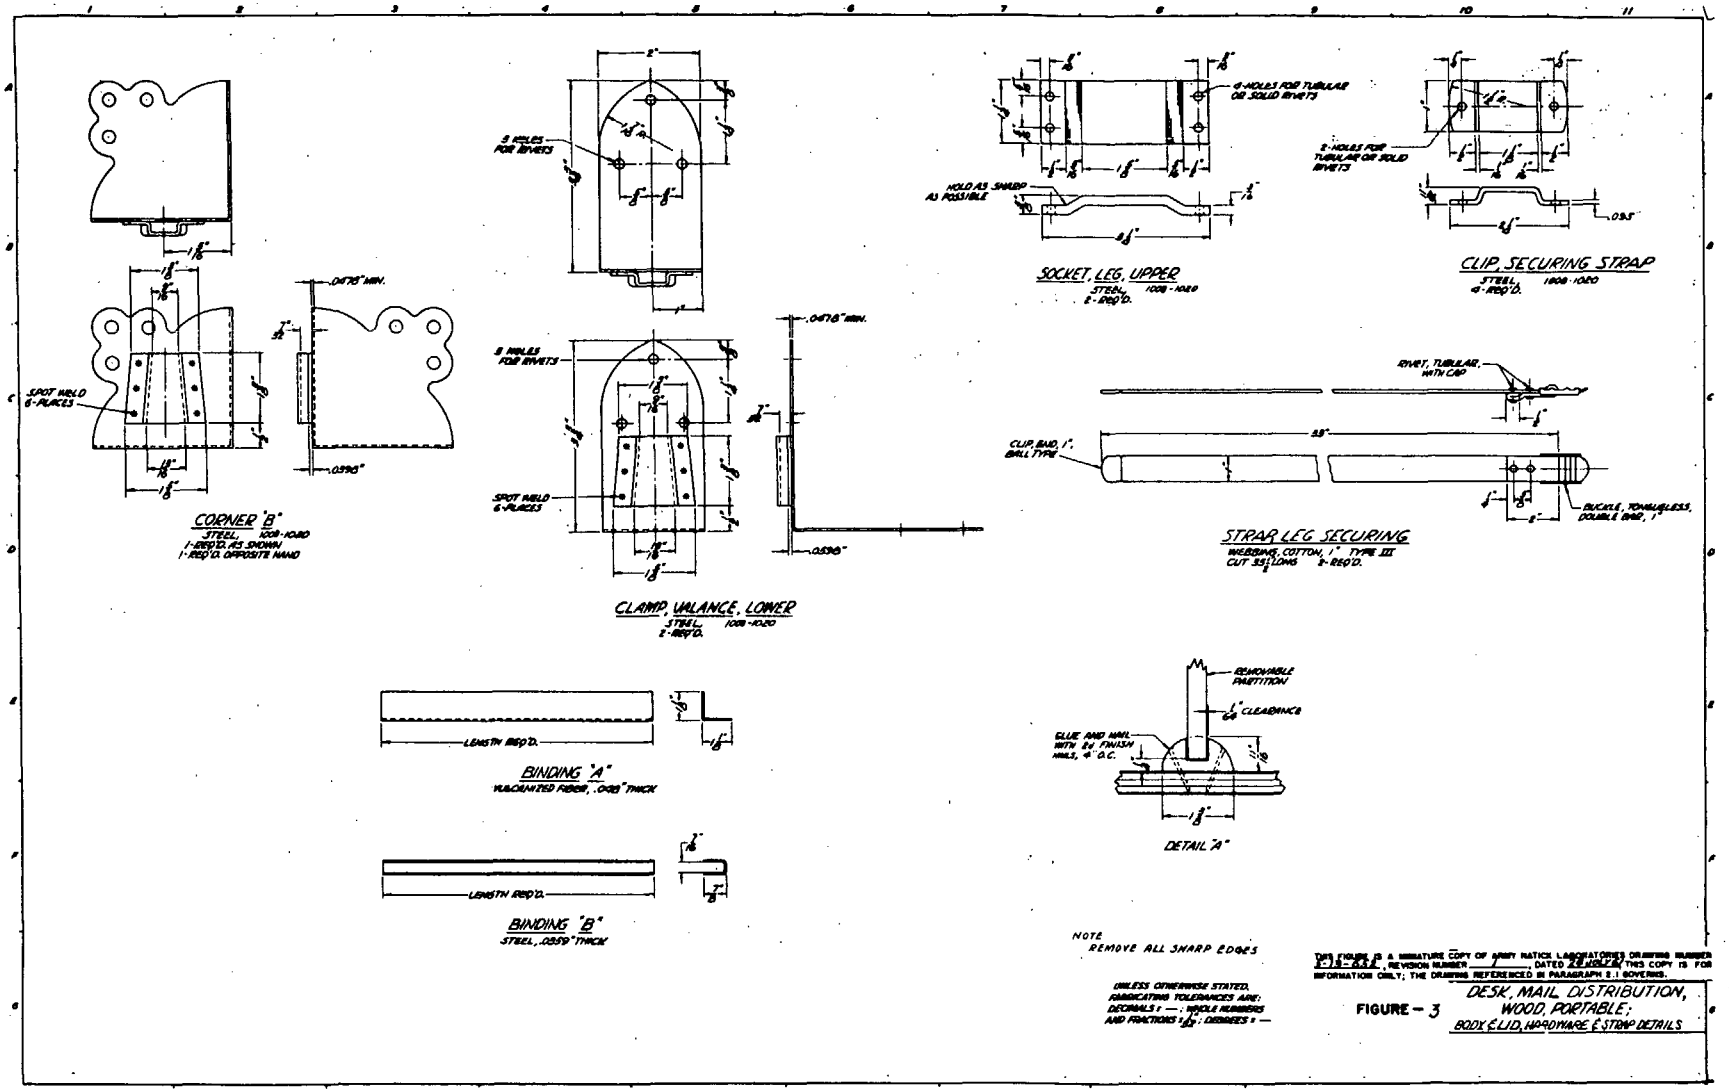

THIS FIGURE IS A MINIATURE COPY OF GRAY RATICH LABORATORIES DRAWING NUMBER 4-15-63 A, REVISION NUMBER —, DATED 21 AUG 63. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE – 3 DESK, MAIL DISTRIBUTION, WOOD, PORTABLE; BODY & LID, HARDWARE & STRAP DETAILS

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

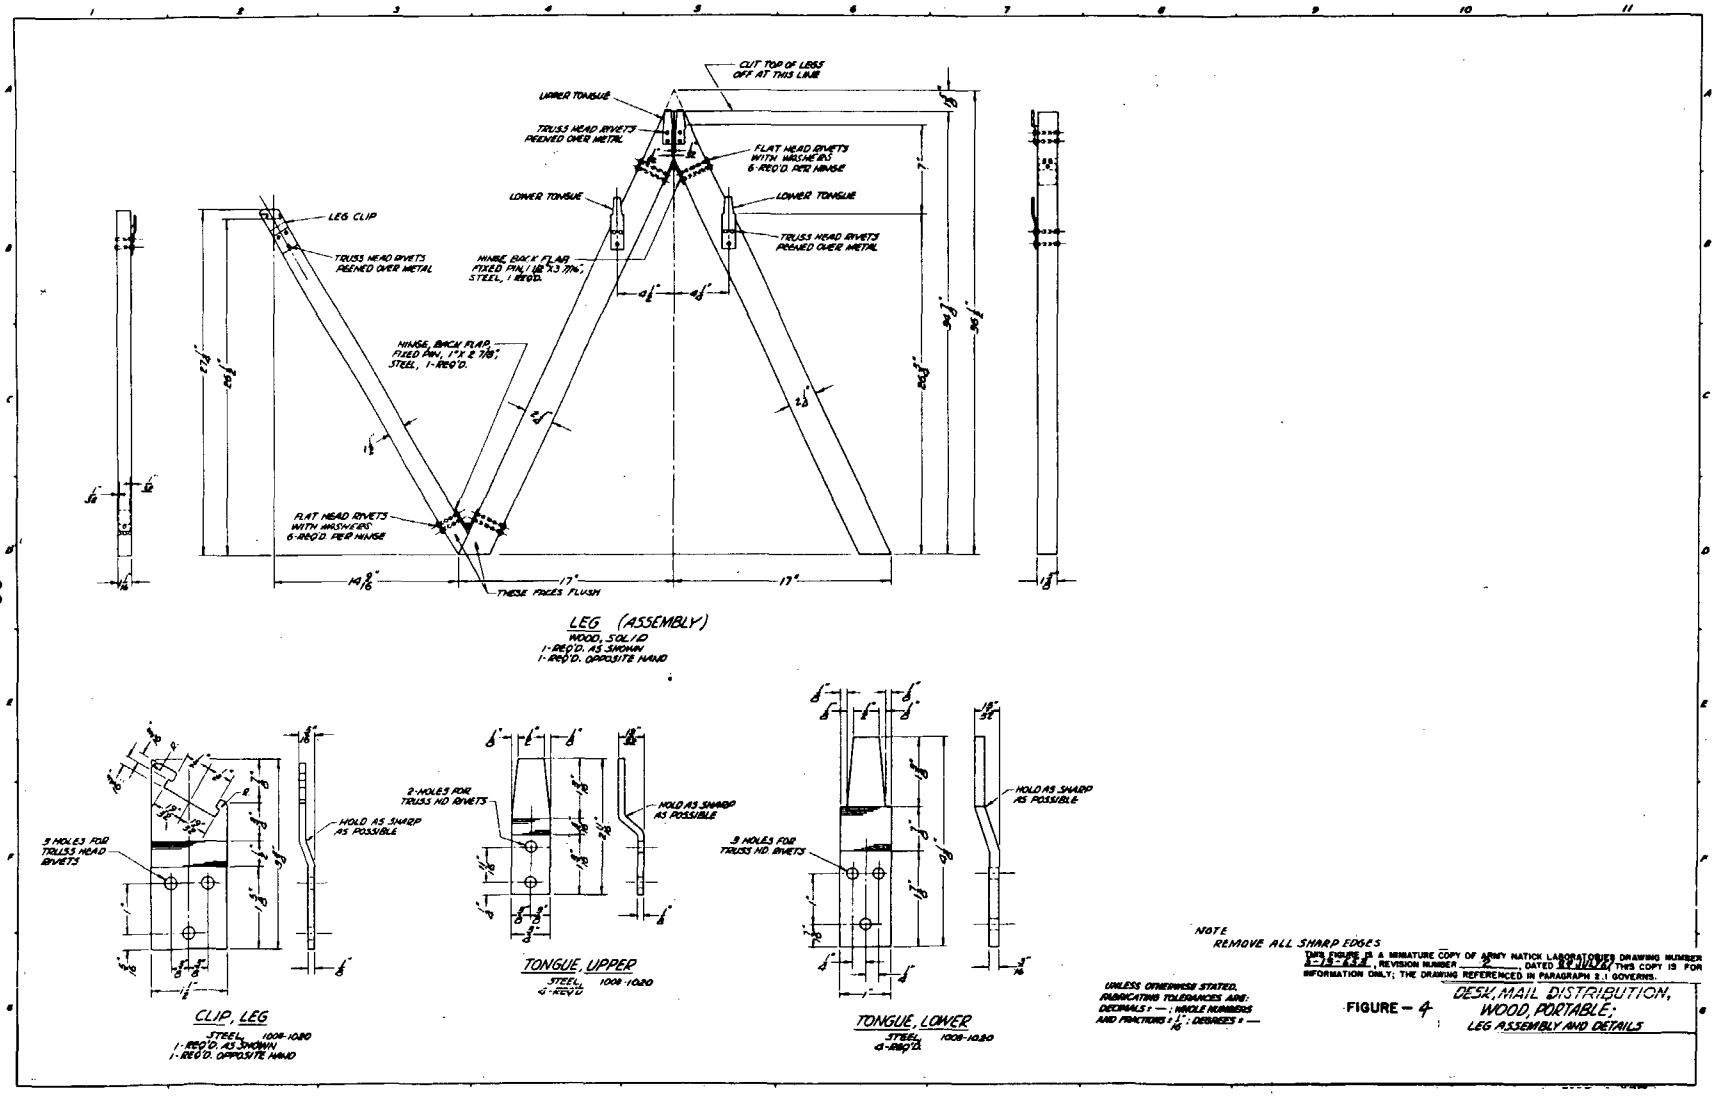

LEG (ASSEMBLY)
WOOD, SOLID
1-REQ'D. AS SHOWN
1-REQ'D. OPPOSITE HAND

CLIP, LEG
STEEL, 1008-1080
1-REQ'D. AS SHOWN
1-REQ'D. OPPOSITE HAND

TONGUE, UPPER
STEEL, 1008-1080
4-REQ'D.

TONGUE, LOWER
STEEL, 1008-1080
4-REQ'D.

NOTE
REMOVE ALL SHARP EDGES

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER E-15-888, REVISION NUMBER 2, DATED 24 JULY 61. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

UNLESS OTHERWISE STATED, FABRICATING TOLERANCES ARE: DECIMALS ± —; WHOLE NUMBERS AND FRACTIONS ± 1/16; DEGREES ± —

FIGURE – 4 DESK, MAIL DISTRIBUTION, WOOD, PORTABLE; LEG ASSEMBLY AND DETAILS

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Desk, Mail Distribution, Wood, Portable - MIL-D-1769E

ORGANIZATION

CITY AND STATE	CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*	DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

343-218 (A-95)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:43Z
Check the source to verify that this is the current version before use.