MIL-I-1821J
8 April 1988
SUPERSEDING
MIL-I-1821H
19 November 1984

MILITARY SPECIFICATION

INSOLES, FOOTWEAR (VENTILATING TYPE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers ventilating-type insoles.

* 1.2 Classification. The insoles shall be of the following types, sizes and widths, as specified (see 6.2).

Type I - Four layer construction, natural color mesh top layer
Type II - Four layer construction, khaki color non-woven top layer

TABLE I. Schedule of sizes

Width	3	4	5	6	7	8	9	10	11	12	13	14
N	X	X	X	X	X	X	X	X	X	X	X	X
R	X	X	X	X	X	X	X	X	X	X	X	X
W	X	X	X	X	X	X	X	X	X	X	X	X

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8335

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
L-S-125	- Screening, Insect, Nonmetallic
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies should be obtained from the Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material (see 6.4).

* 3.1.1 Plastic screening, 20 by 20 mesh (for type I insole). The screening material shall conform to type I, class 1 or 2, mesh size 20 by 20 of L-S-125, except that the base resin shall be a copolymer consisting of 85 ± 2 percent vinylidene chloride, the requirement for bursting strength after accelerated weathering shall not apply, and the additive system based upon the weight of the base resin copolymer shall not exceed 7.5 percent. The color shall be natural.

* 3.1.2 Nonwoven material (for type II insole). The nonwoven material shall be made of 100 percent heterofil polyamide fibers, point bonded to provide air and water vapor permeability, and shall be resistant to microbiological degradation. The material shall have a thickness of 0.030 to 0.035 inch, a weight of 4.5 to 5.5 ounces per square yard, and a minimum air permeability of 50 cubic feet per minute per square foot. The color shall be khaki (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

* 3.1.3 Plastic screening, 16 by 16 mesh (for type II insole). The screening material shall be a plain weave mesh fabric manufactured from polyvinylidene chloride extruded monofilament yarn and conform to type I, class 2, mesh size 16 by 16 of L-S-125, except that the requirement for bursting strength after accelerated weathering shall not apply. The color shall be natural.

* 3.1.4 Plastic screening, 29 by 28 honeycomb mesh (for types I and II insoles). The screening material shall be a loom state mesh fabric manufactured from polyvinylidene chloride extruded monofilament yarn and conform to type I, class 2 of L-S-125, except that the requirements for bursting strength shall be as specified in table II. The material shall be a 29 by 28 honeycomb mesh conforming to the weave design shown on figure 1. Tolerances for mesh shall be +1, -2 warp ends per inch and ± 2 picks per inch. The color shall be natural.

TABLE II. Average bursting strength, pounds per square inch (minimum)

Material	Initial	After water immersion (24 hours)	After water immersion (24 hours) and 48 hours air drying	After heat aging
Type I, class 2, 29 by 28 honeycomb mesh	280	300	283	275

3.2 Construction.

* 3.2.1 Type I construction. Each insole shall be made of four layers of plastic screening. The top two layers shall be made of the 20 by 20 mesh screening specified in 3.1.1. The bottom two layers shall be made of the 29 by 28 honeycomb mesh screening specified in 3.1.4. The plain mesh layers shall be uppermost when the four layers are die cut (see 6.3). The layers shall be securely joined together around the edge by a method that will weld, fuse, or cement the edges of all the layers into a single unit. The bond or union of the edges shall be smooth and even. The finished insole shall not be cut, torn, or punctured and shall show no decomposition, fraying, unraveling,

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the current version before use.

or ply separation at any point of the periphery. Each pair of insoles shall consist of a right and left with the plain mesh side to be worn next to the foot. The thickness of the finished insole shall be not less than 0.200 inch and not more than 0.230 inch when tested as specified in 4.2.4.

* 3.2.2 Type II construction. Each insole shall be made of four layers. The top layer shall be made of nonwoven material as specified in 3.1.2. The second layer shall be made of the 16 by 16 mesh screening specified in 3.1.3. The third and fourth layers shall be made of the 29 by 28 honeycomb mesh screening specified in 3.1.4. The nonwoven material top layer shall be uppermost when the layers are die cut (see 6.3). The layers shall be securely joined together around the edge by a method that will weld, fuse, or cement 1/8 to 3/16 inch around the edges of all the layers into a single unit. The bond or union of the edges shall be smooth and even. The finished insole shall not be cut, torn, or punctured and shall show no decomposition, fraying, unraveling, or ply separation at any point of the periphery. Each pair of insoles shall consist of a right and left with the nonwoven layer worn next to the foot. The thickness of the finished insole shall be not less than 0.180 and not more than 0.230 inch when tested as specified in 4.2.4.

3.2.3 Patterns. Patterns shall conform in size and contour to standard patterns on file at the contracting activity. Variations of plus 1/32 inch or minus 1/16 inch in the length and width of the insoles from the standard pattern length and width shall be permitted.

3.2.4 Marking.

3.2.4.1 Size and type marking. The size, width, and type of each insole shall be legibly stamped on the top (plain mesh - type I, or nonwoven material - type II) side with ink that will adhere to the plastic screening. The size shall be stamped in numbers and the width in letters. The numbers and letters shall be not less than 1/2 inch and not more than 5/8 inch in height.

3.2.4.2 Special marking. The words "THIS SIDE UP - DO NOT BOIL" shall be stamped on the top (plain mesh - type I, or nonwoven material - type II) side of the insole. The letters shall be not less than 1/2 inch nor more than 5/8 inch in height and spaced not less than 1/8 inch and not more than 1/4 inch apart. Spacing between words shall be not less than 1/4 inch and not more than 1/2 inch.

3.3 Workmanship. The finished insoles shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:46Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

* 4.2.1.1 Certification. Nonwoven material shall be accepted on the basis of a contractor's certificate of compliance indicating conformance with the requirements specified in 3.1.2.

4.2.2 End item visual examination. The end item shall be examined for the defects listed in table III. The lot size shall be expressed in units of one insole. The sample unit shall be one insole and the selection shall be by pairs. Defects for pairing shall be classified as a single defect. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects

Examine	Defect
Pairing	Not properly mated, i.e., not right and left of same size
Design	Not as specified
Color	Screening not natural color Top layer of type II insole not khaki
Construction and workmanship	Not specified number of layers of screening Weave of honeycomb layer not as specified Any cracked or broken filament Any cut, tear, or puncture Any layer separation, decomposition, fraying, or unraveling at any point on the edge of the insole Edge not welded, fused, or cemented into a single unit Edge not smooth Rough places on insole likely to irritate foot Any puckering, distortion, or malformation which may cause discomfort to the user
Marking	Missing, incomplete, incorrect, illegible, not specified type or size, not in proper location, or not accomplished in the specified manner

4.2.3 End item dimensional examination. The insoles shall be examined for conformance to dimensional requirements in 3.2.3. Any dimension that is not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of one insole. The sample unit shall be one insole and the selection shall be by pairs. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

4.2.4 End item testing. The end item shall be tested for the characteristics listed in table IV. The lot size shall be expressed in units of one insole. The sample unit shall be one insole. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5. All requirements are applicable to the sample unit.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the currentversion before use.

TABLE IV. End item tests

Characteristic	Requirement paragraph	Test method	No. of determinations per sample unit	Results reported as
Material	3.1.1, 3.1.2, 3.1.3, and 3.1.4	1/	---	---
Thickness	3.2.1 and 3.2.2	5030 2/	3	To nearest 0.001 inch

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

2/ Refer to FED-STD-191. The procedure detailed for determining the thickness of woven and knitted materials, felts, and nonwovens shall be used. The "Up Side" of the insole shall be toward the pressure foot of the test apparatus.

4.2.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the currentversion before use.

the contracting officer.

Examine	Defect
Content	Number of pairs per bundle is more or less than required 1/ Number of bundles per container is more or less than required

1/ For this defect four bundles of insoles from each container in the sample shall be examined.

4.2.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Twelve pairs of insoles of one type, size and width only, shall be evenly stacked and secured around the shank with cotton tape or twine.

5.1.2 Commercial. Insoles shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the currentversion before use.

* 5.2.1 Level A packing. Three hundred and eighty-four pairs of type I or one hundred and ninety-two pairs of type II insoles of one type, size, and width only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style OSC-L (minimum 2-inch overlap), grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat, with every other bundle reversed heel to toe, two in length, four in width, and four of type I or two of type II in depth within a shipping container. Approximate inside dimensions of each shipping container shall be in accordance with table V. Voids occurring in the shipping container shall be filled with crumpled kraft paper or folded fiberboard pads. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

TABLE V. Approximate inside dimensions of shipping container 1/

Range of sizes	Range of widths	Length inches	Width inches	Depth inches
3 to 8 inclusive	All	21-1/2	13-1/4	12
9 to 13 inclusive	All	24-1/2	15	12

1/ Approximate dimensions are furnished as a guide only. For insole sizes 14N, 14R, and 14W, the contractor shall determine the shipping container dimensions. The dimensions of the shipping container shall be such that will result in a snug-fit of the contents to be packed therein.

* 5.2.2 Level B packing. Three hundred and eighty-four pairs of type I or one hundred and ninety-two pairs of type II insoles of one type, size, and width only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style OSC-L (minimum 2-inch overlap), type CF (variety SW), or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed flat, with every other bundle reversed heel to toe, two in length,

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the currentversion before use.

four in width, and four of type I or two of type II in depth within a shipping container. Approximate inside dimensions of each shipping container are as specified in table V. Voids occurring in the shipping container shall be filled with crumpled kraft paper or folded fiberboard pads. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.5.

5.2.3 Commercial. Insoles, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), insoles packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern 5 shall be used for containers used for sizes 3 to 8 insoles and pallet pattern 3 shall be used for containers used for sizes 9 to 14 insoles. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, bundles, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable. Every fourth bundle shall have attached a manila colored paper shipping tag for the identification information.

6. NOTES

6.1 Intended use. The type I insole is intended to be worn inside of the hot weather boot. The type II insole is intended to be worn inside the mildew and water resistant DMS combat boot.

* 6.1.1 Size determination. The size of insole required to be used with the sizes of combat boots and hot weather boots made on MIL-5 lasts, is as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the currentversion before use.

Sizes of boots	Size of insole (for specified boot width) Boot width XN, N, NR	Boot width R, RW	Boot width W, XW
3	3N	3R	3W
3-1/2, 4	4N	4R	4W
4-1/2, 5	5N	5R	5W
5-1/2, 6	6N	6R	6W
6-1/2, 7	7N	7R	7W
7-1/2, 8	8N	8R	8W
8-1/2, 9	9N	9R	9W
9-1/2, 10	10N	10R	10W
10-1/2, 11	11N	11R	11W
11-1/2, 12	12N	12R	12W
12-1/2, 13	13N	13R	13W
13-1/2, 14	14N	14R	14W

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type, size, and width required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. Type and class of unit load required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

6.3 Dies. In order to prevent decomposition of the plastic filaments where the edges of the insoles are welded, the use of suitable nonferrous dies is recommended.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.1).

6.5 Top layer (type II). Faytex style No. 150 nonwoven material available from Faytex Corporation, 240 Ivory Street, Braintree, MA 02184, has been found to meet the requirements of 3.1.2.

* 6.6 Subject term (key word) listing.

Footwear
Insoles, ventilating type

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the currentversion before use.

6.7 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians

Army - GL
Air Force - 11

Review activities:

Army - MD
Navy - NU
Air Force - 82, 99
DLA - CT

User activities:

Navy - MC
Air Force - 45

Preparing activity:

Army - GL

Project No. 8335-0165

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

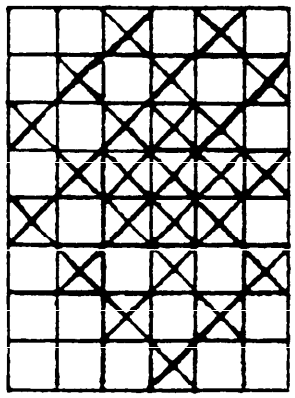


FIGURE 1. Type II- honeycomb weave.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-I-1821J	Insoles, Footwear (Ventilating Type)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.