MIL-P-1983G

13 May 1976
SUPERSEDING
MIL-R-1983F
7 March 1968

MILITARY SPECIFICATION

RACK, BREAD, BAKERS', ONE WIRE SHELF, FOLDING TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size of a folding bread rack.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-W-461 - Wire, Steel, Carbon, (Round, Bare, and Coated)

MILITARY

MIL-B-2316 - Bakery Equipment, Including Unit Assemblies, Repair Parts and Tools, Preparation for Delivery of

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-130 - Identification Marking of U.S. Military Property

FSC 7320

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY NATICK RESEARCH & DEVELOPMENT COMMAND

5-11-693	-	Rack, Bread, Bakers', 1 Wire Shelf, Folding Type; Assembly
5-11-694	-	Rack, Bread, Bakers', 1 Wire Shelf, Folding Type; Leg Assembly and Details
5-11-695	-	Rack, Bread, Bakers', 1 Wire Shelf, Folding Type; Shelf Assembly
5-11-696	-	Rack, Bread, Bakers', 1 Wire Shelf, Folding Type; Hinge and Shelf Details

(Miniature copies of Drawings 5-11-693 through 5-11-696, identified as figures 1 through 4 respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM)

A 108 - Steel Bars, Carbon, Cold Finished, Standard Quality.
A 366 - Steel, Carbon, Cold Rolled Sheet, Commercial Quality.
A 512 - Cold-Drawn Buttweld Carbon Steel Mechanical Tubing.
A 513 - Electric-Resistance-Welded Carbon and Alloy Steel Mechanical Tubing.
A 519 - Seamless Carbon And Alloy Mechanical Tubing.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

3.2 Material. Materials not definitely specified shall be of the quality normally used by the manufacturer for his table or rack provided the completed item complies with all provisions of this specification.

3.2.1 Carbon steel sheet. Carbon steel sheet shall conform to the requirements of ASTM A 366.

3.2.2 Carbon steel wire. Carbon steel wire shall conform to finish 1 of QQ-W-461.

* 3.2.3 Steel tube. Welded steel tube shall conform to MT1010 thru MT1020 of ASTM A 512 or ASTM A 513. Seamless steel tube shall conform to MT1010 thru MT1020 of ASTM A 519.

3.2.4 Carbon steel. Carbon steel rod shall be any grade 1008 thru 1020 conforming to the requirements of ASTM A 108.

3.3 Design and construction. The design and construction of all components and assemblies shall conform to the details, dimensions, materials and finish specified herein and as shown on the drawings listed in 2.1. Commercial tolerances are applicable to the thickness of material shown on drawings.

3.4 Finish. The shelf and leg assemblies shall be hot-dripped, zinc galvanized after fabrication. The hinges and sleeve spacers shall be hot-dipped, zinc galvanized before assembly. The nuts, screws, and washers shall be zinc coated. All hot dip zinc coating shall be in accordance with the manufacturers standard commercial practice.

3.5 Marking for identification. Each rack shall bear a corrosion-resisting steel or an aluminum identification plate marked in accordance with MIL-STD-130. The plate shall be securely attached to the vertical face of one end angle of the shelf assembly.

3.6 Workmanship. The finished bread rack shall be clean and free of deformities, dents, breaks, rough grind marks, sharp edges and corners, burrs and slivers. There shall be no loose components and the hinges shall operate without binding. All threaded fasteners shall be drawn tight. There shall be no crossed or stripped threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

3.6.1 Welding.

3.6.1.1 Fusion welds. Fusion welds shall be continuous, complete and free of breaks and fractures, areas of poor or no fusion, burn throughs, undercuts and surface gas pockets. All flux and metal splatter shall be removed and all weld surfaces shall be ground to remove irregularities, pits and metal build-ups. Corner welds shall be ground to a radius.

3.6.1.2 Spot welds. Spot welds shall be sound and free of flashes, pits, and burn throughs.

3.6.2 Galvanizing. Galvanizing shall completely cover all exposed surfaces and shall be free of flakes, blister, peeling, pits, rust, scratches, lumps, dross, flux, drips, acid, black spots, smudges and finger marks, and imbedded foreign matter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required, it shall be examined for defects specified in table II and dimensions specified. The presence of any defect listed in table II or any dimension not within specified limits shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except where otherwise indicated herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

4. 1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection.

4.4.2.1 Visual examination of shelf and leg assemblies. Examination shall be made of the shelf and leg assemblies for the defects listed in table I prior to hot dip galvanizing. The inspection level shall be S-2 with an acceptable quality level (AQL) of 2.5 expressed in terms of defects per hundred units. The lot shall consist of all shelf assemblies or all leg assemblies, as applicable, offered for inspection at one time. The sample unit shall be one shelf assembly or one leg assembly, as applicable.

TABLE I. In-process visual examination

Examine	Defect
Welding	Any weld missing, completely broken or not fused
	Weld cracked; incomplete; or evidence or poor fusion or burn through
	Weld contains surface gas pockets or has been undercut or excess flux or spatter has not been removed
	Poor surface appearance of weld as from craters or piling up of deposited metal, or weld has not been ground on all exposed surfaces
	Corner welds of shelf assembly not ground to a radius
	Leg pin welds not ground even with top of leg
	Spot weld broken or not fused, or missing where requir

4.4.3 End item inspection. The inspection lot shall consist of all bread racks offered for inspection at one time. The sample unit shall be one completely fabricated bread rack.

4.4.3.1 Visual examination. The bread rack shall be examined for defects in table II. The inspection level shall be II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Coating omitted.	X	
	Coating not continuous or tightly adherent (flaky, blistered or peeling).	X	
	Coating is pitted, scratched (base metal shows through - check for evidence of rust except on hair-line scratches).	X	
	Coating contains lumps, dross, flux, drips, imbedded foreign matter, acid, black spots, smudges, or finger prints.	X	
Design, construction, and workmanship (general)	Any component missing, malformed, cut, damaged.	X	
	Any component loose.		X
	Hinge binds (difficult to fold).	X	
	Sharp corners, rough grind marks, slivers or burrs not removed.	X	
	Screws, nuts, and threaded fasteners stripped or crossthreaded.	X	
	Rod ends not bent flat with bottom surface of side angles.	X	
	Leg pin weld not ground even with top of leg.	X	
	Edges or corners not beveled where required.		X
Identification marking	Nameplate missing, in wrong location, or not securely attached.		X

4.4.3.2 Dimensional examination. Examination shall be made for dimensions specified. Any nonconformance shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.4.4 Inspection of packaging. Preservation-packaging, packing, and marking shall be inspected in accordance with the quality assurance provisions in MIL-B-2316.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

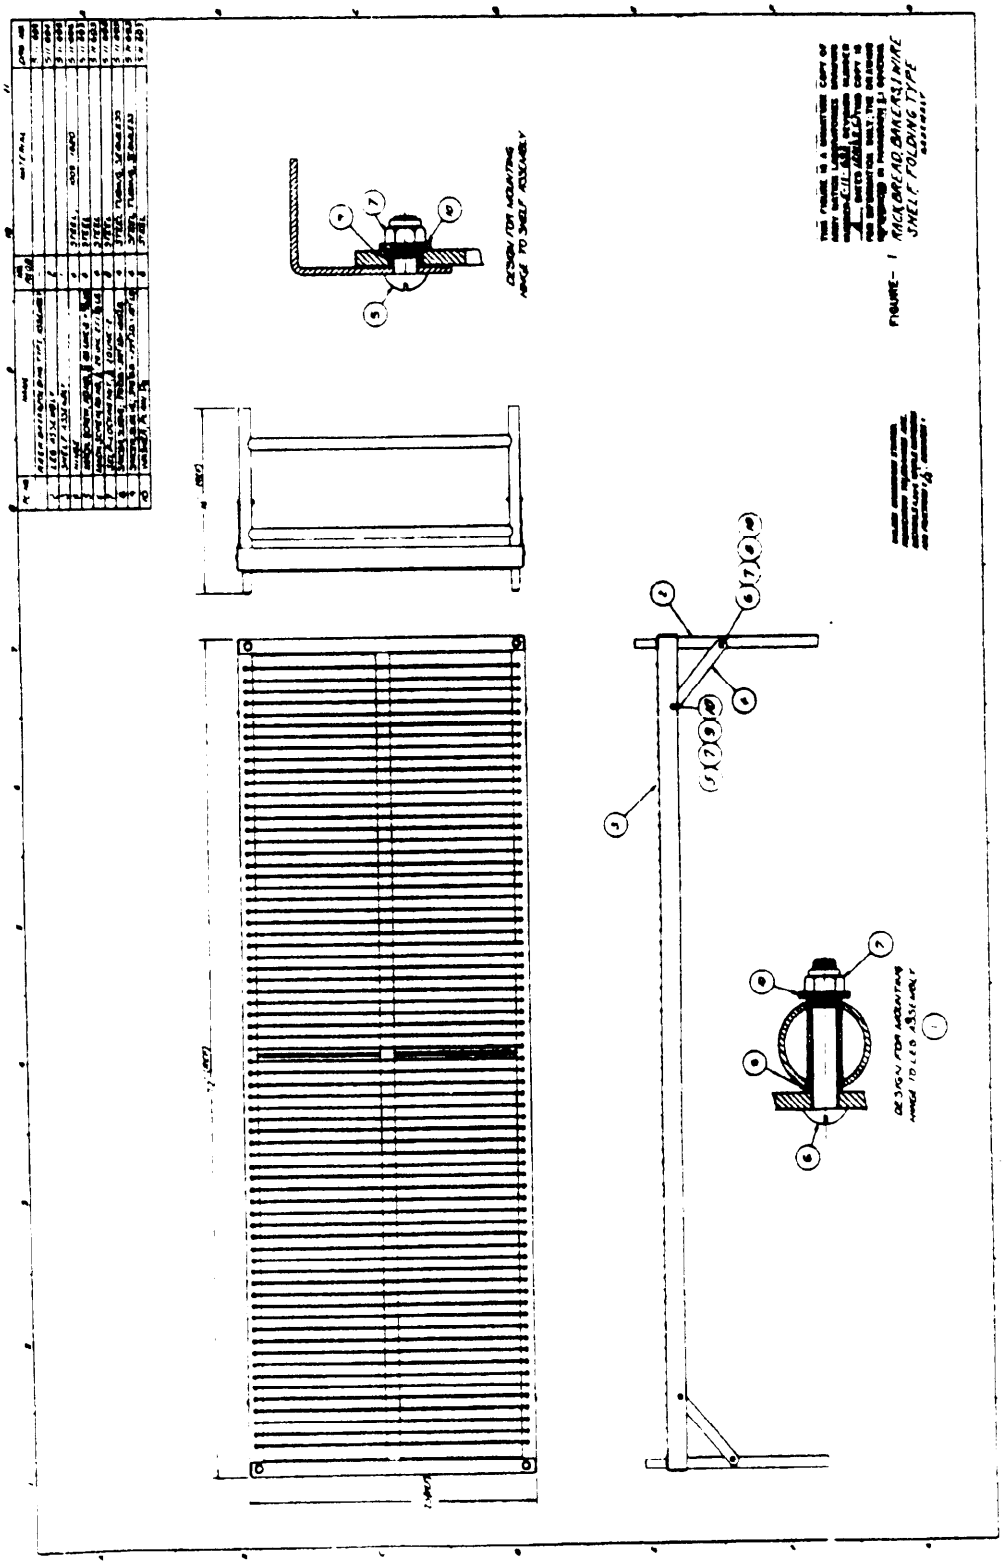


FIGURE 1. Backboard, basketball, shelf folding type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.


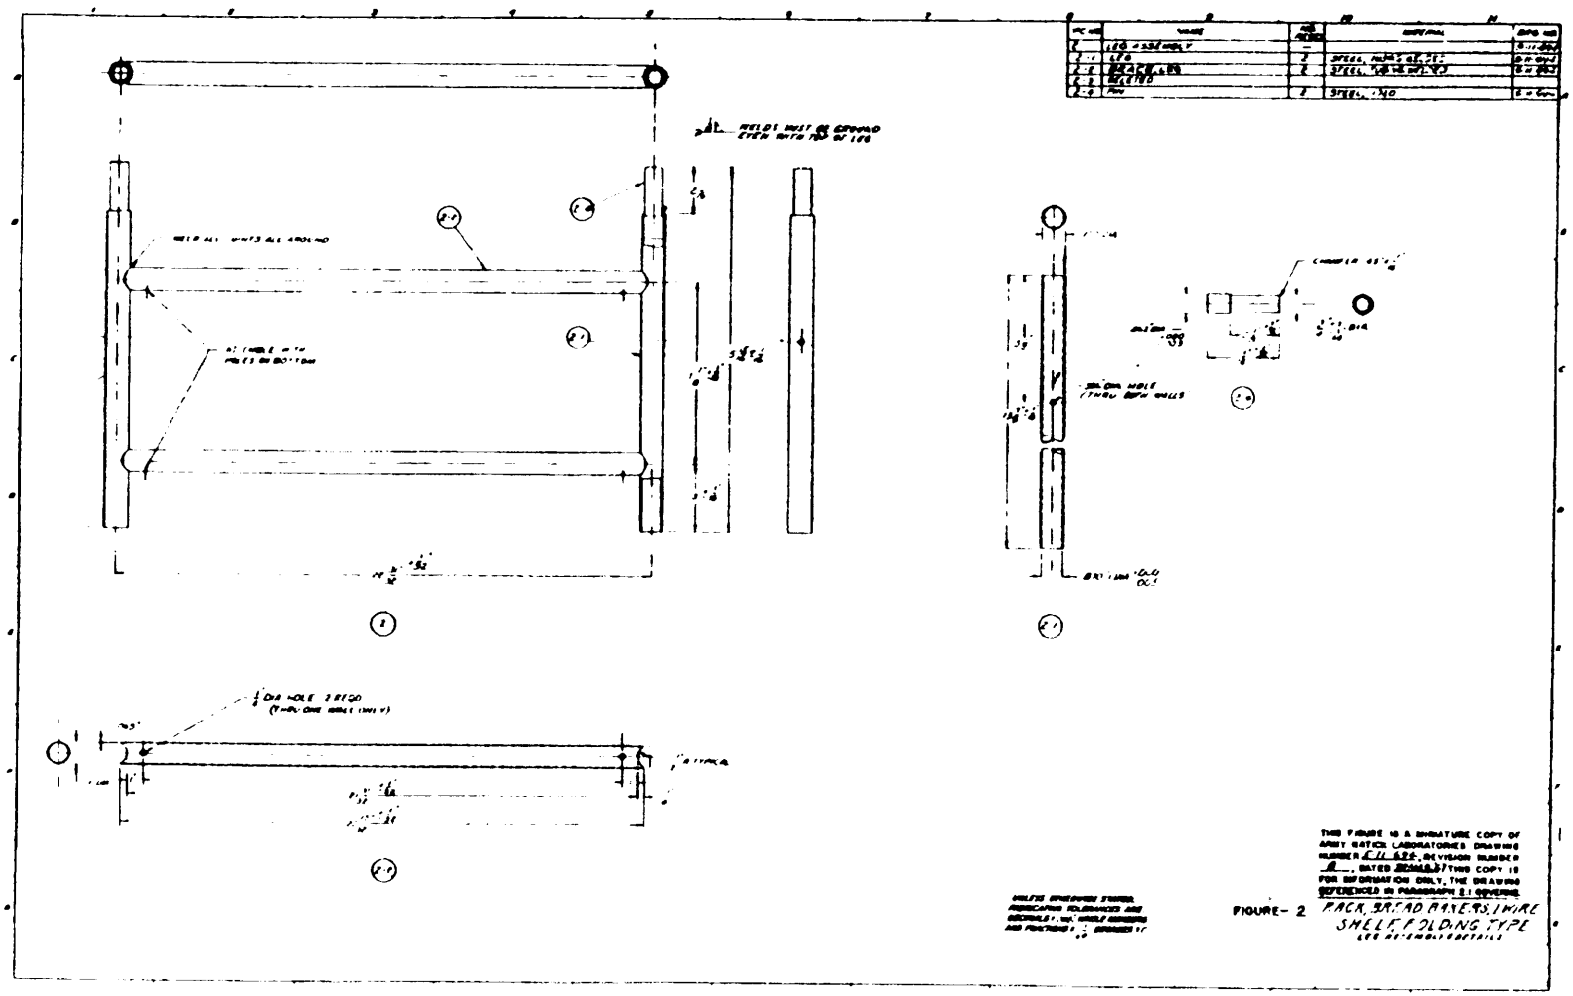


FIGURE- 2 RACK, BREAD ARRESTS, WIRE SHELF, FOLDING TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-01-16T13:55Z
Check the source to verify that this is the current version before use.

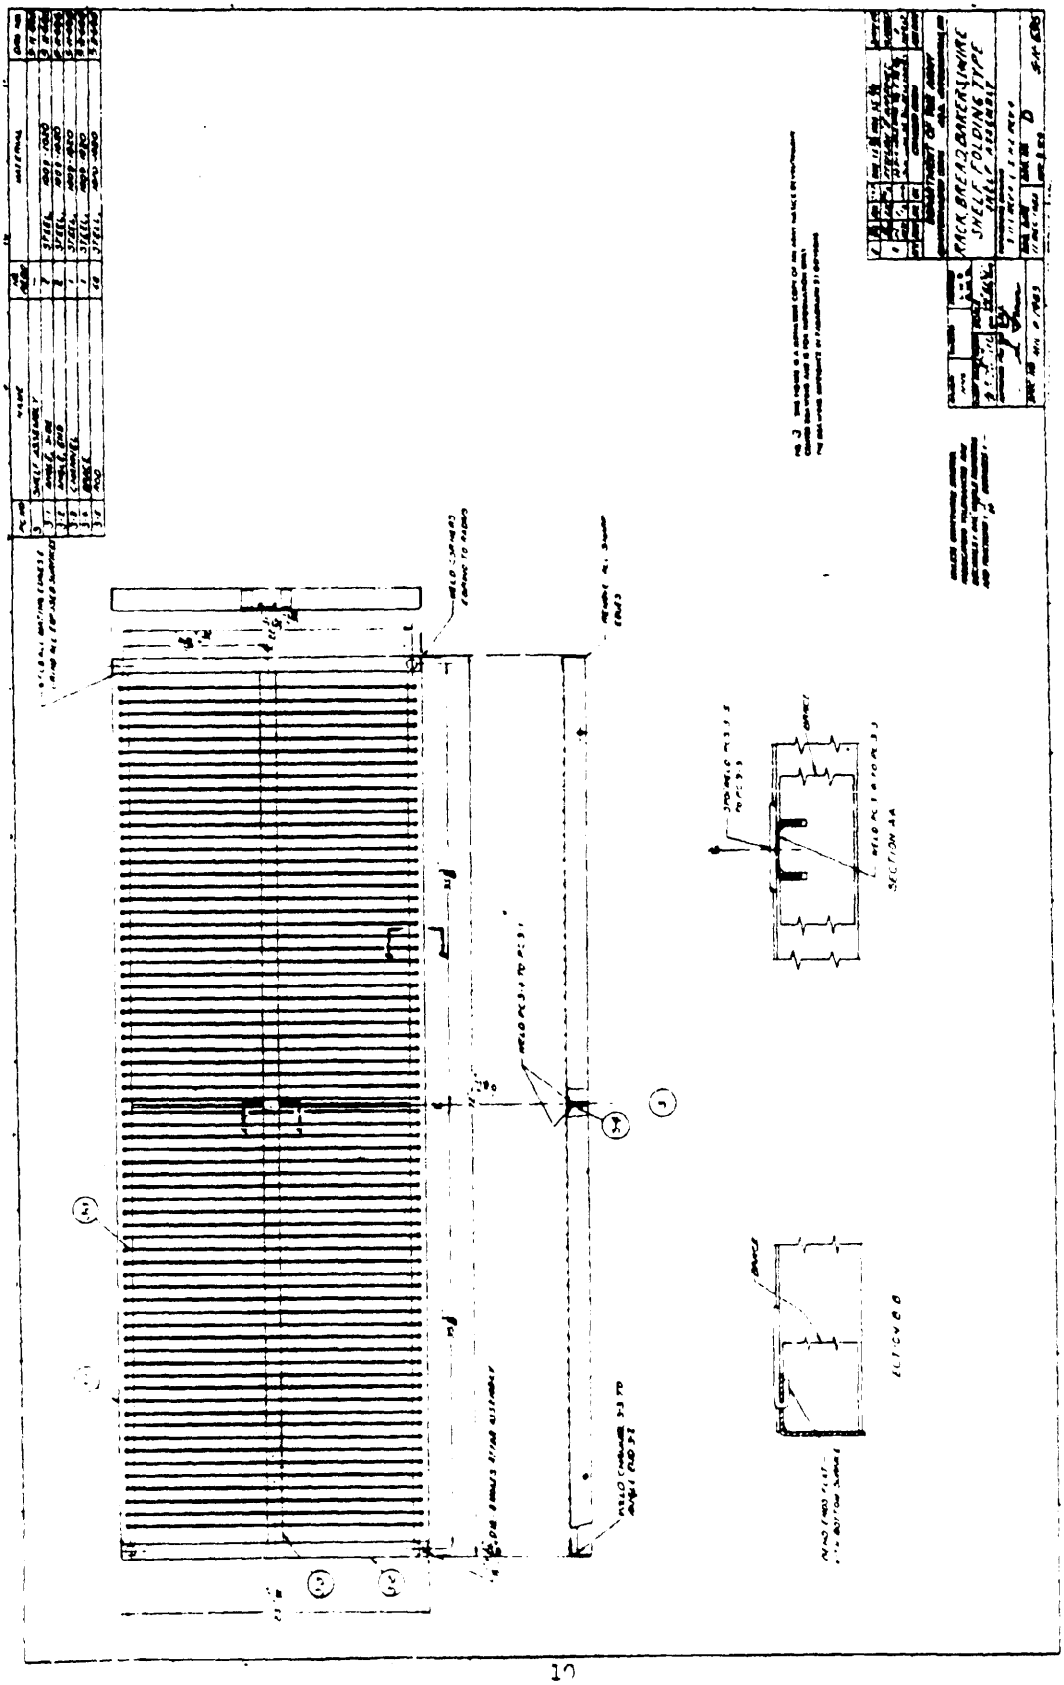

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

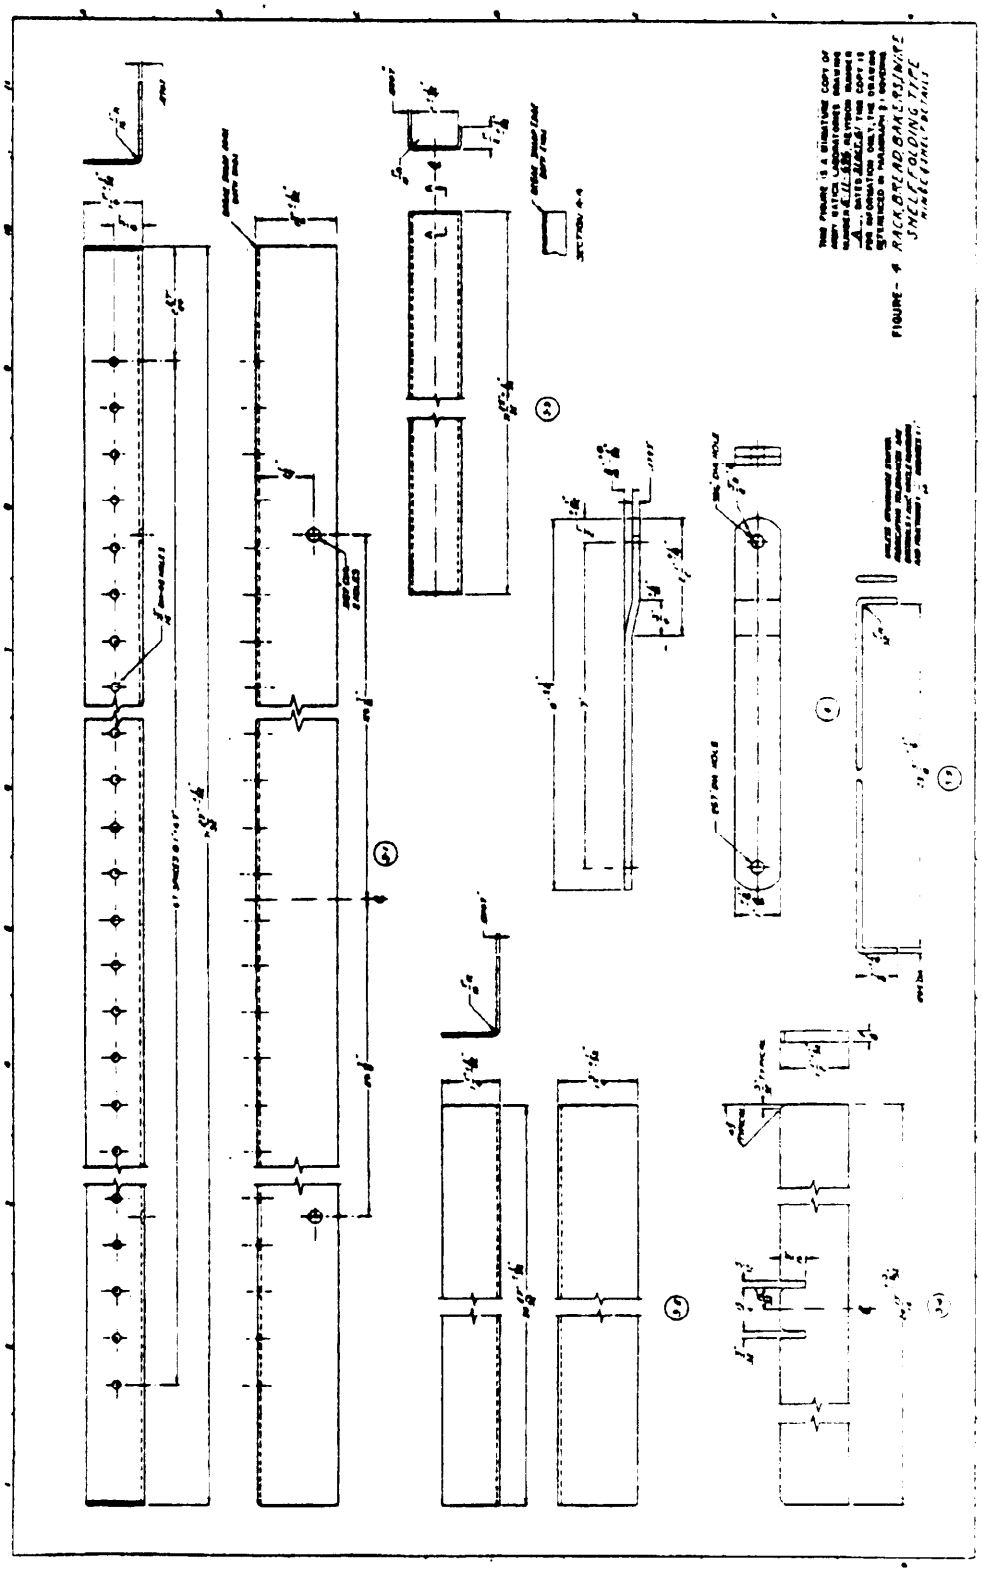


FIGURE 4. RACK, BREAD, BAKE'S, 16 INCH SHEET, FOLDING, TYPE II, CLASS 1, STYLE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

44-55 Enter data from form, or leave blank if no entry on

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:55Z
Check the source to verify that this is the current version before use.