MIL-S-1820G
18 December 1986
SUPERSEDING
MIL-S-1820F(GL)
23 March 1979

MILITARY SPECIFICATION

SMOCK, FOOD INSPECTOR'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a long white smock made of cotton twill or drill cloth.

1.2 Classification. The smock shall be one type in the following sizes (see 6.2).

Schedule of sizes

Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
V-T-276	-	Thread, Cotton
CCC-C-426	-	Cloth, Drill, Cotton
CCC-C-461	-	Cloth, Twill, Uniform Cotton
DDD-L-20	-	Label: for Clothing, Equipment, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issues of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this document may appear in the sample, in which case this document shall govern.

3.2 Materials (see 6.4).

3.2.1 Basic material. The basic material shall be white cotton twill cloth conforming to type VI of CCC-C-461 or white cotton drill cloth conforming to type I, II, or III, class 3 of CCC-C-426.

3.2.2 Thread. The cotton thread for seaming and stitching the smocks shall conform to type IA2, white, ticket No. 30, 3 ply and ticket No. 50, 3 ply of V-T-276.

3.2.3 Labels. Each smock shall have an identification label and a size label or a combination identification and size label conforming to DDD-L-20. The smocks are intended to be laundered.

3.2.3.1 Identification label. The identification label shall conform to type VI, class 1.

3.2.3.2 Size label. The size label shall conform to type VI, class 2.

3.2.3.3 Combination label. The identification label and size labels may be combined into one label conforming to type VI, class 14.

3.2.4 Fasteners, snap. The snap fasteners shall be brass, conforming to style 2, finish 2, male and female complete, consisting of a socket with button size 1 or 2, and stud with eyelet size 1 or 2, conforming to MIL-F-10884.

3.3 Design. The smock is single breasted, with a notched lapel, cut-on facings, two breast patch pockets with pencil pocket within the left breast pocket, two lower patch pockets, two side hand openings, and sleeves finished with adjustable cuffs (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

3.4 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which show size, directional lines and notches for correct assembling, and shall not be altered in any way. The patterns provide a 1/2 inch seam allowance for all double-lapped, double-stitched seams and 3/8 inch for all other seams unless otherwise indicated in table II.

3.4.1 List of pattern parts. The components of the smock shall be cut from material as specified and according to the number of parts listed in table I.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Cotton twill cloth or cotton drill cloth	Front	2
	Back	1 1/
	Sleeve	2
	Side pocket (lower)	2
	Top pocket	2
	Pencil pocket	1
	Cuff	4
	Collar	2 2/

1/ The back may be cut in two pieces, with proper seam allowances added.

2/ The collar may be cut in one piece, with top seam allowance omitted.

3.5 Construction.

3.5.1 Stitches, seams and stitching. Stitch, seam, and stitching types specified in table II are those covered by FED-STD-751. When two or more seams or stitch types are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, puckers, or open seams will result. Unless otherwise specified, the gage of stitching shall be 1/4 to 5/16 inch for all double-lapped, double-stitched seams with the outer row of stitching 1/16 inch from edge on outside of smock.

3.5.1.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the current version before use.

3.5.1.2 Type 301 stitching. Ends of all stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn.

3.5.1.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

* 3.5.1.3 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Where stitch type 401 is used, the looper thread shall be on the inside of the smock. Both ends of all seams or stitching produced with 401 stitch type, when not caught in other seams or stitching shall have a 1/2 to 3/4 inch chain extending beyond each end. All repairs shall be in accordance with 3.5.1.2.1.a and 3.5.1.2.1.b. Type 401 stitching may be repaired using type 301 stitching.

3.5.1.4 Types 515, 516, and 519 stitching. Thread tension shall be maintained so there will be no loose stitching. The looper thread of the safety stitch shall be on the inside of the smock. All repairs shall be in accordance with 3.5.1.2.1.a and 3.5.1.2.1.b except substitute "3/4 inch" where "1/2 inch" appears.

3.6 Manufacturing operations requirements. The smock shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished smock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

3.6.1 Figure. The figure is furnished for information only. To the extent of any inconsistencies between the written document and the figure, the document shall govern.

3.6.2 Marking. The parts of the smock shall be marked to insure a uniform size and shade throughout the garment. Any method of marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on type markings.
c. Adhesive type markings.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut smock in strict accordance with patterns furnished, which show size, shape, directional lines and notches for proper assembly. Directional lines shall be in the warp direction except the top collar and cuffs which shall be cut in the direction of the filling. b. Cut all parts from the same piece of material except cuff lining pieces, sleeve bindings, undercollar (two-piece construction), pencil pocket and hanger loop which may be cut from ends. Cuff linings, sleeve bindings, undercollar and reinforcement pieces may be cut in the direction of either the warp or filling. Sleeve bindings shall be cut to meet the finished measurements of operation 9 and the bindings may be strip cut and placed on rolls.						
2.	Marking (see 3.6.2). Mark, ticket, or bundle all parts to insure a uniform shade and size throughout the garment. Parts cut from ends need not be shade marked, however, size components shall be marked or bundled indicating sizes.						
3.	Labels. a. Sew size and identification labels (on all four sides, not more than 3/16 inch from edges) to inside center of back as follows:	301		10-14	30-3	30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Labels. (cont'd) (1) Size label. The top edge caught in the stitching of the top collar to neck under hanger. (2) Identification label. The top edge shall be parallel to bottom edge of size label and may be caught in the bottom edge of size label stitching. Stitch remaining three sides. NOTE: When a combination size and identification label is used, the label shall be positioned as in (1) above. An off center tolerance of 1/4 inch is permitted for labels and hanger.						
4.	Make hanger.						
	a. Fold a strip of basic material in half lengthwise with the raw edges turned to the inside and double-stitch, 3/16 to 1/4 inch gage.	301 or 401	EFp-2	10-14	30-3 30-3	30-3 30-3	
	- or -						
	b. Fold a strip of the basic material lengthwise with the edges abutting in the center and double-stitch, 3/16 to 1/4 inch, with the covering stitch on the underside.	406	EFh-1	10-14	30-3	30-3	
	c. Hanger shall finish 5/16 to 3/8 inch wide and shall measure 3 $\pm$ 1/2 inches long in the finished smock.						
	d. Catch ends of hanger in seam attaching collar to top of smock.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make and attach pencil pocket.						
	a. Hem top of pocket with raw edge turned in and stitch 1/16 to 1/8 inch from edge. The hem shall measure 3/8 to 5/8 inch wide.	301	EFb-1	10-14	30-3	30-3	
	b. Turn in side edges and bottom of pocket and stitch to left front of smock as indicated by marks on pattern.	301	LSd-1	10-14	30-3	30-3	
	c. Place a vertical row of stitching down center of pocket)1/8 inch off center tolerance), through smock, forming two openings. The pocket opening shall measure 2 ± 1/4 inches wide.	301	SSv-1	10-14	30-3	30-3	
6.	Make and attach pockets.						
	a. Hem top of pockets with the raw edges turned in and stitch 1/16 to 1/8 inch from edge. The width of the hem shall finish 7/8 to 1-1/8 inches wide.	301	EFb-1	10-14	30-3	30-3	
	b. Position pockets as indicated by marks on pattern, turn in side and bottom edges and stitch to smock 1/16 to 1/8 inch gage. The bottom edge of pencil pocket shall not be caught in the seaming of the bottom edge of left breast pocket.	301	LSd-1	10-14	30-3	30-3	
	c. Breast pockets shall finish 5-3/4 inches in width at top opening and 7 inches in length on outside. Lower side pockets shall finish 7-1/2 inches in width at top opening and 9-3/4 inches in length on outside. A ± 1/4 inch tolerance shall be permitted on all measurements.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make sleeve cuffs.						
	a. Join cuff and cuff lining along side and bottom edges. Turn, work out the corners, and stitch 3/16 to 1/4 inch from turned edges.	301 or 401 and 301	SSe-2(a)	10-14	30-3	30-3	
					30-3	30-3	
			SSe-2(b)	10-14	30-3	30-3	
8.	Make collar.						
	a. Join undercollar to top collar along top and side edges. Turn, work out points and stitch 3/16 to 1/4 inch from turned edges.	301 or 401 and 301	SSe-2(a)	10-14	30-3	30-3	
					30-3	30-3	
			SSe-2(b)	10-14	30-3	30-3	
	- or -						
	b. When one-piece collar is utilized, stitch ends, turn, and edge stitch with stitching continued along folded edge.	301 or 401 and 301	SSe-2(a)	10-14	30-3	30-3	
					30-3	30-3	
			SSe-2(b)	10-14	30-3	30-3	
			and OSf-1	10-14	30-3	30-3	
9.	Bind sleeve openings.						
	a. Bind sleeve openings with raw edges of binding turned in and stitch 1/16 to 3/32 inch from turned edges.	301	BSc-1	10-14	30-3	30-3	
	- or -						
	b. Stitch binding to sleeve opening in two operations with stitching 1/16 to 1/8 inch from turned edge.	301	BSg-2	10-14	30-3	30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
9.	Bind sleeve openings. (cont'd)						
	c. Turn binding to inside of sleeve and stitch through binding and sleeve at top of opening, full width of binding - bartack or automatic straight tack. The binding shall finish 1/2 to 3/4 inch in width.	Bartack or 301		28 per bartack 28 per tack	30-3 30-3	30-3 30-3	
10.	Stitch front facings.						
	a. Turn facing to outside front as indicated by notches on pattern and stitch across step from folded edge to notch.	301 or 401	SSe-1(a)	10-14	30-3 30-3	30-3 30-3	
	b. Stitch across bottom from folded edge to back edge of facing.	301 or 401	SSe-2(a)	10-14	30-3 30-3	30-3 30-3	
	c. Turn facing to inside, force out edges and point at step and edges and point at bottom hem.						
	d. With facing in proper position, turn in back edge of facing and stitch to smock from shoulder to bottom edge. If edge of facing is selvaged, it need not be turned in.	301	EFb-1	10-14	30-3	30-3	
11.	Join back seam.						
	If back is cut in two pieces, join the two pieces at center back from neck to bottom of smock with a double-lapped and double-stitched seam. The left back shall lap the right back.	301 or 401	LSc-2	10-14	30-3 30-3	30-3 30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Join shoulder seam.						
	Join shoulder seam with a double-lapped and double-stitched seam. The fronts shall lap the back.	301 or 401	LSc-2	10-14	30-3 30-3	30-3 30-3	
13.	Set sleeves.						
	Join sleeves to armholes with a double-lapped and double-stitched seam with body parts lapping the sleeves.	301 or 401	LSc-2	10-14	30-3 30-3	30-3 30-3	
*14.	Join underarm and side seams.						
	a. Turn raw edge of upperside of hand opening in 1/2 ± 1/16 inch, then fold in again 1/2 ± 1/16 inch and single stitch 1/16 to 1/8 inch from fold. Turn raw edge of underside of hand opening in 1/4 ± 1/16 inch, then fold in again 1/4 ± 1/16 inch and single stitch 1/16 to 1/8 inch from the fold. The hand opening shall finish 8 to 9 inches long.	301	EFb-1	10-14	30-3	30-3	
	b. Form underarm seam and join back and front of smock along side seam to notches of hand opening with a 3/8 ± 1/16 inch safety stitch.	515 516 or 519	LSq-2(a)	10-14	30-3	30-3	
	c. Fold seam allowance of underarm seam and side seam toward front of smock and top stitch 3/16 to 1/4 inch from fold. The stitching shall continue along open side of hand opening.	301	LSq-2(b) and EFb-1	10-14	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-01-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach cuffs.						
	a. Seam the underply of cuff to inside of sleeve.	301	SSa-1	10-14	30-3	30-3	
	b. Turn in the raw edge of the top ply of cuff and seam to sleeve on the outside, 1/16 to 3/32 inch from turned edge.	301	LSb-1	10-14	30-3	30-3	
	- or -						
	c. Turn in the raw edges, insert sleeve between raw edges and stitch cuff to sleeve in one operation 1/16 to 3/32 inch from turned edges.	301	LSa-1	10-14	30-3	30-3	
16.	Attach collar.						
	a. Seam undercollar to neck of smock.	301	SSa-1	10-14	30-3	30-3	
	b. Turn up collar, turn in raw edges of top collar, and single stitch to neck of smock through undercollar, catching size label (or combination label when applicable) and hanger in seaming at center back (see operations 3 and 4).	301	LSb-1	10-14	30-3	30-3	
17.	Hem bottom of smock.						
	Turn up bottom of smock as indicated on patterns with the raw edges turned in and single stitch 1/16 to 1/8 inch from edge. The hem shall finish 1 $\pm$ 1/8 inches wide.	301	EFb-1	10-14	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Edge stitch fronts. Edge stitch top edge of lapels, starting at top back edge of step, down front and continue stitching across bottom to back edge of facing. The edge stitching shall be 3/16 to 1/4 inch from edges.	301	SSe-2(b) and OSf-1	10-14	30-3	30-3	
19.	Bartacking. a. The bartacks shall measure 3/8 to 1/2 inch in length and be positioned as follows: (1) Vertically bartack each corner of top and lower pocket openings with bartacks superimposed on edge stitching. (2) Bartack across both ends of hanger through collar joining seam. (3) Bartack top and bottom ends of hand openings across the double row of stitchings.	Bartack		28 per bartack	30-3	30-3	
20.	Attach snap fasteners. a. Attach five socket parts on left front 1 ± 1/4 inches back of front edge as indicated by marks on patterns. b. Attach five stud parts on right front 1-3/4 ± 1/4 inches back of front edge, to correspond with socket parts. c. Attach one socket, centered on front end of cuff, 1 ± 1/8 inches from edge.						

NATICK Form 903
1 Dec EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-01-16T13:46Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Attach snap fasteners. (cont'd) d. Attach one stud, centered on back end of cuff 3/4 ± 1/8 inch from edge and attach a second stud 2 ± 1/8 inches from first stud, measured from center to center of studs. NOTE: An off center tolerance of 1/8 inch is allowed for fasteners required to be centered.						
21.	Clean smock. a. Unless otherwise specified, trim all thread ends to a length of not more than 1/4 inch and remove loose threads. b. Remove all spots, stains, and marking tickets. c. Close snap fasteners on fronts.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished smocks shall conform to the measurements shown in table III.

TABLE III. Finished measurements (in inches)

Measurements	SIZE				TOLERANCE	
	Small	Medium	Large	X-Large	Plus	Minus
1/2 Breast 1/	25-7/8	27-7/8	29-7/8	31-7/8	1/2	1/2
Sleeve inseam 2/	17-1/2	17-1/2	17-1/2	17-1/2	1	1/2
Length 3/	49	50-1/2	52	53-1/2	1	1

1/ 1/2 breast taken from side seam to side seam at the base of the armhole with the fronts snapped.

2/ Sleeve length taken along the underarm seam of sleeve from base of armhole to bottom edge of cuff.

3/ Length taken along the center back of smock from collar joining seam to the bottom edge of smock.

3.8 Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in table IV shall be removed from production and replaced with non-defective and properly matched components.

3.9 Workmanship. The finished smock shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

* 4.2.2 End item visual examination. The completely fabricated smocks shall be examined for the defects listed in table IV. The lot size shall be expressed in units of smocks. The sample unit shall be one smock. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15.0 for major and minor A defects combined, and 25.0 for total (major, minor A, and minor B combined) defects.

TABLE IV. End item visual defects

Defects	Classification		
	Major	Minor	
		A	B
Material defects and damages			
a. Any hole, cut, tear, needle chew, burn, smash, mend, or multiple float.	X		
b. Slub.	X		
c. Shade bar.			X

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous shall not be classified as defects.

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Shaded parts			
Any part shaded.			X
Cleanness			
a. Thread ends not trimmed or loose threads not removed.			X
b. Any spot or stain on outside.			X
c. One or more shade markings not removed.			X
Component and assembly			
Any component part or required operation omitted (unless otherwise classified herein).	X		
Cutting			
Any component part not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements.	X		
Seams and stitching			
a. Accuracy of seaming:			
1. Seams twisted, puckered, or pleated (unless otherwise classified herein).		X	
2. Any part of smock caught in any unrelated operation or stitching.	X		
3. End(s) of stitching not secured as specified.		X	
4. Optional basting or holding stitching visible on outside of smock or not removed.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
b. Gage of stitching (edge or raised stitching):			
1. Irregular, i.e., unevenly gaged or corresponding stitching not uniform (to be scored only when condition exists on major portion of seam).		X	
2. Edge or raise stitching sewn too close to edge, resulting in damage to cloth.	X		
3. Beyond range of width specified or varies more than 1/16 inch when no range is specified.		X	
c. Open seams:			
Any seam open:			
- up to 1/4 inch inclusive.			X
- more than 1/4 inch to 3/4 inch inclusive.		X	
- more than 3/4 inch.	X		
d. Repair of open seam not as specified.			X
NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or run-off stitches occur. A double-stitched seam is considered open when either side of the seam is open.			
e. Raw edges:			
1. On outside:			
- 1/8 to 1/4 inch inclusive.			X
- more than 1/4 inch to 3/4 inch inclusive.		X	
- more than 3/4 inch.	X		
2. On inside:			
- more than 3 inches.		X	
- more than 1 inch to 3 inches inclusive.			X
NOTE: Raw edges are classified as such when they occur at places where an edge is required to be turned under. Raw edges not caught in stitching shall be classified as an open seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
f. Runoffs:			
1. Joining seams - when resulting in an open seam, use open seam classification.			
2. Edge or raised stitching (when not resulting in open seam):			
- 1/4 inch to 1/2 inch inclusive.			X
- more than 1/2 inch.		X	
g. Seam and stitch type:			
1. Seam or stitch type not as specified.		X	
2. Looper thread exposed on outside of smock when 401 stitch is used.		X	
h. Stitch tension (except bartacks):			
1. Loose tension resulting in a loose seam.	X		
2. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
3. Loose tension (exposed loops of top or bottom thread):			
- For a distance of 1/2 inch or more, on outside.			X
NOTE: Puckering is evidence of excessively tight tension. When puckering is evident, seams shall be tested by exerting pull in lengthwise direction of seam.			
i. Stitches per inch (to be scored only when condition exists on major portion of seam or stitching):			
1. Less than minimum specified:			
- one or two stitches.			X
- three stitches.		X	
- four or more stitches.	X		
2. More than maximum specified.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
j. Stitches skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched):			
1. More than 1/2 inch.		X	
2. More than 1/4 inch to 1/2 inch inclusive.			X
k. Bartack (applying to all bartacks):			
1. Omitted, insecure or misplaced, not serving intended purpose:			
- one bartack.			X
- two bartacks.		X	
- three or more bartacks.	X		
2. Less than 3/8 or more than 1/2 inch long.			X
3. Loose tension on one or more.			X
Snap fasteners (applicable to all sockets and studs)			
a. Omitted, not securely attached, mismated, or otherwise defective, affecting function:			
- one snap fastener.		X	
- two or more snap fasteners.	X		
b. Rough or sharp edge.	X		
c. One or more clinched too tightly, cutting surrounding fabric.	X		
d. Not specified type, size, or finish.		X	
e. Three or more splits in either the eyelet or button barrel.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Collar construction and setting			
a. Top collar twisted, puckered, or tight causing edges to curl.		X	
b. Off center by more than 1/2 inch.			X
c. Tight at joining to neck, causing excessive puckering or pleats on front or back.		X	
d. Top collar not cut in filling direction.			X
e. Points uneven in length by more than 1/4 inch.		X	
f. Points poorly shaped or not uniformly shaped.		X	
g. Edges uneven or not properly forced out.			X
h. Collar overlapped or open 3/4 inch or more at neck when front is closed.		X	
i. Hanger loop omitted or ends not securely caught in collar setting seam.		X	
j. Hanger loop off-center by more than 1/4 inch.			X
k. Hanger loop less than 5/16 or more than 3/8 inch wide or less than 2-1/2 or more than 3-1/2 inches long.			X
Front closure			
a. Stud and socket parts not aligned, causing a noticeable bulge or twist on front when closed.	X		
b. Studs or sockets out of vertical alignment by 1/4 inch or more.		X	
c. Center of socket less than 3/4 inch or more than 1-1/4 inches from left front edge.		X	

Source: https://assist.dla.mil -- Downloaded: 20260-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Front closure (cont'd)			
d. Center of stud less than 1-1/2 inches or more than 2 inches from right front edge.		X	
e. Snap fasteners reversed, i.e., stud on left front and socket on right front.	X		
f. Unequally spaced by more than 3/8 inch.			X
g. Length of closed front:			
1. Left front shorter than right front at bottom by more than 3/8 inch but not more than 3/4 inch when closed.		X	
2. Left front shorter than right front at bottom by more than 3/4 inch when closed.	X		
3. Left front longer than right front at bottom by more than 1/2 inch.		X	
4. Fronts uneven in length at neck by 1/4 inch or more when closed.			X
Fronts			
a. Facing tight, short, or twisted, causing fullness or twist on front.		X	
b. Front edge stretched, irregular, curved out at bottom corner, or not evenly forced out.		X	
c. Steps uneven in length by 1/4 inch or more.			X
d. Fullness, pleat, or twist in front facing.		X	
e. Top of facing not caught in collar seam.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Hand opening			
a. Less than 8 inches or more than 9 inches between bartacks.			X
b. Turned-in edge of front or back parts not caught in bartacking.		X	
c. Fullness or tightness at opening.		X	
d. Raw edge of seam allowance on upper and lower side of hand opening not turned in.		X	
e. Out of alignment by 1 inch or more.		X	
f. Finished length of openings uneven by more than 1/2 inch.			X
Pocket(s)			
a. Breast or lower pockets out of horizontal alignment by more than 1/2 inch.		X	
b. Pocket(s) excessively full or tight at opening.		X	
c. Width of pocket hems:			
- Breast and lower pocket(s), less than 7/8 or more than 1-1/8 inches.			X
- Pencil pocket less than 3/8 or more than 5/8 inch.			X
d. Size of finished breast pocket(s):			
- Less than 5-1/2 or more than 6 inches in width at top opening.			X
- Less than 6-3/4 or more than 7-1/4 inches in length on outside.			X
e. Size of finished lower pocket(s):			
- Less than 7-1/4 or more than 7-3/4 inches in width at opening.			X
- Less than 9-1/2 or more than 10 inches in length on outside.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Pocket(s) (cont'd)			
f. Width of pencil pocket opening less than 1-3/4 or more than 2-1/4 inches.			X
g. Vertical row of stitching through pencil pocket more than 1/8 inch off center tolerance.			X
h. Pencil pocket not positioned under left breast pocket.		X	
i. Pencil pocket exposed beyond top edge of breast pocket.		X	
j. Bottom edge of pencil pocket caught in seaming of bottom edge of breast pocket.			X
Sleeve(s) construction and setting			
a. Binding of sleeve opening less than 1/2 or more than 3/4 inch wide.			X
b. Sleeve openings uneven in length by more than 1/4 inch to top edge of cuffs.			X
c. Binding twisted, pleated, or puckered.		X	
d. Reversed in setting to armhole, i.e., right sleeve in left armhole.	X		
e. Sleeve tight, causing puckers or pleats on front or back at armhole seam.	X		
f. End of armhole seams staggered from center of seam to center of seam of side seam by more than 1/2 inch.		X	
g. Sleeve cuff(s):			
1. Poorly shaped, full, or twisted.		X	
2. Irregular in width by 1/4 inch or more.			X
3. First stud not aligned with socket causing noticeable bulge or twist on either side of sleeve opening when closed.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Sleeve(s) construction and setting (cont'd)			
g. Sleeve cuff(s): (cont'd)			
4. Studs or sockets not centered to width of cuff by more than 1/8 inch.		X	
5. Center of socket less than 7/8 inch or more than 1-1/8 inches from front side edge of cuff.			X
6. Center of first stud less than 5/8 inch or more than 7/8 inch from back side edge of cuff.			X
7. Center of second stud less than 1-7/8 inches or more than 2-1/8 inches from center of first stud.		X	
8. Stud and socket parts reversed.		X	
Bottom hem			
a. Less than 7/8 inch or more than 1-1/8 inches wide or uneven in width by 1/4 inch or more.		X	
b. Twisted, puckered, or pleated.		X	
Direction of seams			
a. Back lapped on front at side or shoulder seams.		X	
b. Body parts not lapping sleeve.		X	
c. Left back not lapped over right back at center back seam (applicable only when back is cut in two pieces).		X	
Label(s)			
a. Size (or combination) label:			
1. Missing, incorrect, or illegible.		X	
2. Not securely caught in joining seam of collar.		X	

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:46Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defects	Classification Major	Minor A	Minor B
Label(s) (cont'd)			
b. Identification label:			
1. Missing, incorrect, or illegible.		X	
2. Not positioned properly.		X	
c. Any labels off center with center back by more than 1/4 inch.			X
d. Any labels stitched more than 3/16 inch from edges.			X

4.2.3 End item dimensional examination. The smocks shall be examined for the dimensions listed in table III. Any dimension not within the specified tolerance shall be scored as a defect. Also sleeves unequal in length by more than 1/2 inch shall be scored as a defect. The lot size shall be expressed in units of smocks. The sample unit shall be one smock. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

* 4.2.4 Packaging examination. The fully packaged end item shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Markings (exterior and unit pack)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of container flap, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of unit packs per shipping container is more or less than required. Number of smocks per unit pack is more or less than required. 1/ Size shown on one or more smocks not as specified on outer container. 1/

1/ For this defect, one unit pack from each container in the sample shall be examined.

* 4.2.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each smock shall be snapped and folded to approximately 14-1/2 by 11 inches. Five folded smocks of one size only, shall be neatly stacked in a bundle with collars alternated and securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial. Each liner shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A packing. Twenty smocks of one size only, preserved as specified in 5.1, shall be packed flat in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Level A bundles shall be packed flat two in length, one in width, and two in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the examination shall be in accordance with 4.2.4. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Twenty smocks of one size only, preserved as specified in 5.1, shall be packed flat in a fiberboard shipping container conforming to style RSC-L, type CF, class domestic, grade 275 of PPP-B-636. The inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Level A bundles shall be packed flat two in length, one in width and two in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the examination shall be in accordance with 4.2.4. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of PPP-B-636 except that the examination shall be in accordance with 4.2.4.

5.2.3 Commercial packing. Smocks preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), smocks packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be in accordance with load pattern number 3 of the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:46Z
Check the source to verify that this is the currentversion before use.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN's plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The smock is intended for wear by personnel of the Military Medical Service engaged in food inspection activities. The smock may be worn with or without Liner, Smock, Food Inspector's.

* 6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. Type and class of load required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting office issuing the invitation for bids (see 3.1).

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.5 Subject term (key word) listing.

Coat, long, white
Food inspector
Smock

6.6 Changes from previous issue. The margins of this document have been marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0517

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the current version before use.

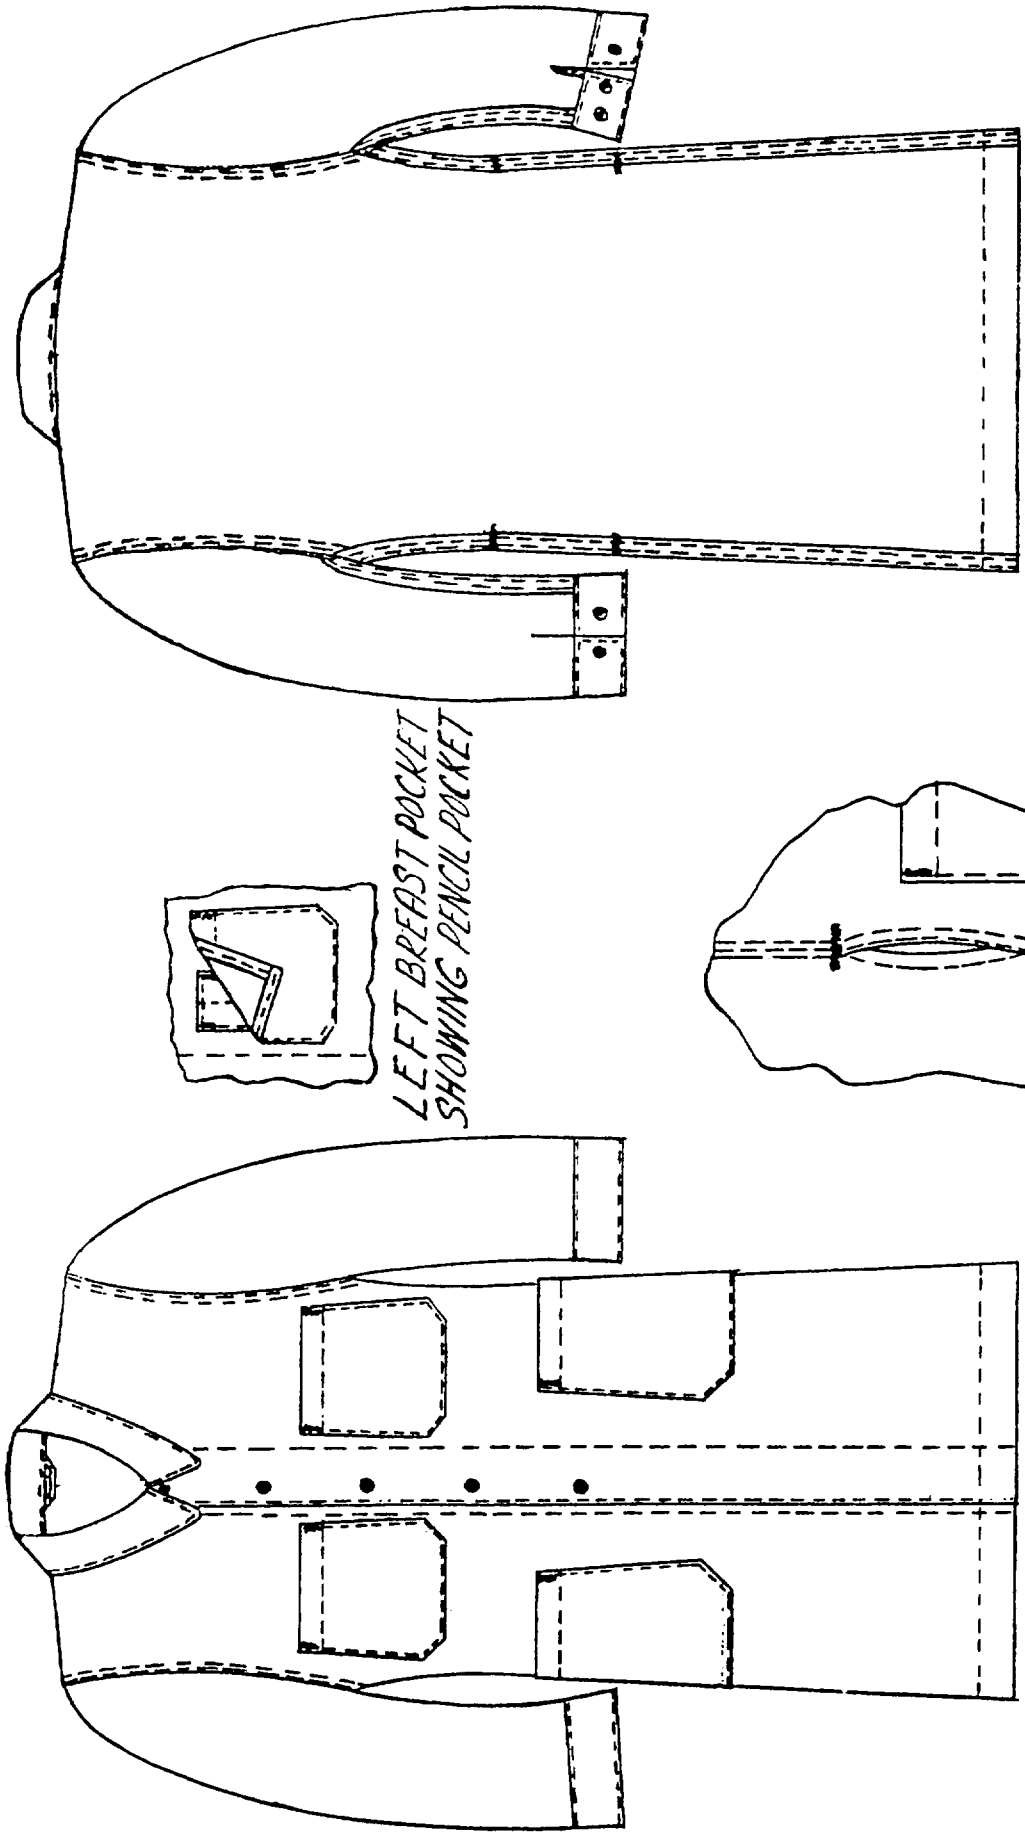


FIGURE 1 - SMOCK, FOOD INSPECTOR'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:46Z
Check the source to verify that this is the current version before use.

:TRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in mitting comments and suggestions for improvements. All users of military standardization documents are invited to provide gestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and led. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the blems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an nowledgement will be mailed to you within 30 days to let you know that your comments were received and are being sidered.

TE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of cification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

ARTMENT OF THE ARMY

ARMY NATICK RESEARCH, DEVELOPMENT
nd ENGINEERING CENTER
N: STRNC-ES
ck, MA 01760-5014

ICIAL BUSINESS
ALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-1820G	Smock, Food Inspector's

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

NATICK OP-1, Feb 86

Source: https://assist.dla.mil -- Downloaded: 20240-16113:462
Check the source to verify that this is the current version before use.