MIL-S-1937C
5 May 1967
SUPERSEDING
MIL-P-001937B(DM)
3 February 1964
MIL-P-1937A
24 October 1952
MIL-S-2022
17 February 1950
(See Section 6)

MILITARY SPECIFICATION

SUITS, MEN'S, ORTHOPEDIC (COAT AND TROUSERS)

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specificaiton covers the requirements for men's orthopedic suits (coats and trousers) in light and heavy weight fabrics (see 6.1).

1.2 Classification.- The coats and trousers shall be of the following types and sizes as specified (see 6.2). Coat or trousers may be procured separately.

Type I - Suit, pajama, with exposed button front coat and trousers.

Type II - Suit, convalescent, with fly front coat, and trousers.

Sizes

Medium
Large

2. APPLICABLE DOCUMENTS

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple (Plastic).
V-T-276	-	Thread, Cotton.
V-T-280	-	Thread, Cotton Gimp, Buttonhole.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
CCC-C-461	-	Cloth, Uniform Twill, Cotton.
DDD-L-20	-	Label, for Clothing, Equipage and Tentage (General Use).
DDD-T-86	-	Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed).
PPP-B-636	-	Box, fiberboard.

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-2107	-	Cloth, Cotton, Oxford and Poplin (for Pajamas).
MIL-F-10884	-	Fasteners, Snap.
MIL-B-43291	-	Boxes: Fiberboard; Corrugated, Double-Wall, Weather Resistant.

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Sample.- Guide samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Preproduction sample. When specified (see 6.2) before production is commenced, a sample garment shall be submitted to or made ready for the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of the specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Material.-

3.3.1 Basic material, type I.- The basic material for type I suit shall be cotton oxford cloth, conforming to type I of MIL-C-2107.

3.3.2 Basic material, type II.- The basic material for type II suit shall be cotton uniform twill cloth, dyed Blue No. 16, conforming to type I of CCC-C-461.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

3.3.3 Tape.- The tape for reinforcing the snap fasteners on coats shall be 1-1/4 inches wide, conforming to type I, class 1 of DDD-T-86 and shall be dyed to match the basic fabric.

3.3.4 Thread.- The thread for seaming, stitching, and buttonhole sewing shall be cotton, type IA3, tickets No. 50-3 ply and No. 70-2 ply and for button sewing shall be ticket No. 20, 4-ply, of V-T-276.

3.3.4.1 Color.- The thread for type I coat and trousers shall be dyed Blue, Shade 0, Cable No. 66029, and for type II coat and trousers shall be dyed Blue, Shade J, Cable No. 66038.

3.3.4.2 Colorfastness.- The dyed thread shall show fastness to light, laundering and chlorine bleaching equal to or better than the standard sample, (see 6.3). When no standard sample is available, the thread shall show "good" fastness to light, laundering and chlorine bleaching.

3.3.5 Gimp.- The gimp for reinforcing the buttonholes shall be type I or II, No. 8, of V-T-280.

3.3.5.1 Color.- The gimp for use in type I coat shall be dyed Blue, Shade 0, Cable No. 66029, and for type II coat and trousers shall be dyed Blue, Shade J, Cable No. 66038.

3.3.5.2 Colorfastness.- The dyed gimp shall show fastness to laundering and chlorine bleaching equal to or better than the standard sample, (see 6.3). When no standard sample is available, the thread shall show "good" fastness to laundering and chlorine bleaching.

3.3.6 Labels.- Each coat and pair of trousers shall have a combination size and identification label conforming to type I, classes 1 and 2 of DDD-L-20. The size shall be spelled out. The label shall include the information required by the applicable products labeling act and the supplier's registration number. Colorfastness requirements of DDD-L-20 for laundering shall apply.

3.3.7 Buttons.- The buttons shall be DOD Shade White BA, Cable No. 62031 for the type I coat, and DOD Shade Blue BL, Cable No. 62005 for the type II coat and trousers, and shall conform to type II, class D, style 20 or 21, 24-line and 30-line, of V-B-871.

3.3.8 Fasteners, snap.- The fasteners for closing the inseam of sleeve, the side of coat, outseam of trousers, and cuff adjustment, shall be brass, nickel finish style 3, finish 3, construction A or B, 17-line, consisting of four parts; a prong, socket, post and stud, conforming to MIL-F-10884, except that a plus or minus tolerance of 1-line is allowed. The prong shall be enameled a shade to match the basic fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

3.4 Design.- The type I coat has an open collar with peak lapels, a breast patch pocket without flap, an exposed button front, and snap-fastened side seams and sleeve inseams, with an adjustable wrist closure. The type I trousers have snap fastened outseams (see figures 1 and 2). The type II coat is the same as the type I coat except that it has a fly front button closure and the breast pocket has a buttoned flap. The type II trousers are the same as the type I trousers except that it has a hip patch pocket, with a buttoned flap. (See figures 3 and 4)

3.4.1 Figures.- Figures are furnished for information only. In the event of any inconsistencies between the figure and specification, the specification shall govern.

3.5 Patterns.- Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which show size, directional lines and notches for correct assembly and shall not be altered in any way. The patterns provide a 1/2 inch seam allowance for double-lapped, double-stitched seams, and 3/8 inch for all other seams, unless otherwise indicated in table II.

3.5.1 List of pattern parts.- The component parts shall be cut from materials specified, in accordance with the number of cut parts required for the manufacturing process, as follows. Separate patterns will be provided for each type.

TABLE I.- List of Pattern Parts

Material	Pattern nomenclature	Cut parts
	Type I Coat	
Cotton oxford cloth (see 3.3.1)	Front	2
	Back	1
	Under sleeve	2
	Top sleeve	2
	Collar (top and undercollar)	2
	Collar stand interlining	1
	Breast patch pocket	1
	Front facing	2
	Back waistband	1
	Front waistband	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

TABLE I.- List of Pattern Parts (cont'd)

Material	Pattern nomenclature	Cut parts
	Trousers	
Cotton oxford cloth (see 3.3.1) (cont'd)	Back	2
	Front	2
	Right fly facing	1
	Front waistband	1
	Back waistband	1
	Type II Coat	
Cotton uniform twill (see 3.3.2)	Front	2
	Back	1
	Under sleeve	2
	Top sleeve	2
	Collar (top and undercollar)	2
	Collar stand interlining	1
	Breast patch pocket	1
	Breast patch pocket flap	1
	Front fly facing (top)	1
	Front fly facing (bottom)	1
	Front facing	2
	Back waistband	1
	Front left waistband	1
	Front right waistband	1
	Trousers	
	Back	2
	Front	2
	Right fly facing	1
	Front waistband	1
	Back waistband	1
	Hip patch pocket	1
	Hip patch pocket flap	1

3.6 Construction.-

3.6.1 Stitches, seams, and stitchings.- Stitch, seam, and stitching types specified in table II are those covered by Federal Standard No. 751. Whenever two or more types of seams or stitches are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper, (underthread) shall be on the inside of the garment. Double needle stitching shall be 3/16 to 5/16 inch gage, with the outer row of stitching 1/16 inch from the edge on the outside of garment. Seam allowances shall be maintained with seams properly sewn so that no raw edges, run-offs, twists, pleats or puckers shall result.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

3.6.2 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams.- Ends of all seams and stitching, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired using a 301 stitch type.

3.6.4 Buttonholes.- Buttonholes for the coats and for the hip pocket flap on type II trousers, shall be eyelet-end-taper-bar type worked over gimp. The end of the buttonholes shall be tacked.

3.7 Manufacturing operations requirements.- The coats and trousers shall be made in accordance with operations listed in table II. The supplier is not required to follow the exact sequence of operations. Any basting or holding stitching required to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished coat or trousers.

3.7.1 Marking.- The components of the coat and trousers shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on type tickets.
c. Adhesive type tickets which leave an impression or traces of paper on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
1.	Cutting.- (COAT AND TROUSERS) a. Cut coat and trousers in strict accordance with patterns furnished which show size, shape, directional lines, placement of pockets and notches for proper assembling of all parts. Directional lines shall be placed in the warp direction of the material. b. Cut all component parts of the coat and trousers from one piece of material, except the undercollar, collar stand interlining, coat fly pieces (type II), hanger loops and fly lining of the trousers which may be cut from ends. Parts cut from ends shall approximate the shade of the garment. c. Cut stripping for hanger loops in sufficient width to comply with operation 4.					
2.	Replacement of damaged parts.- a. Replace at time of cutting any part containing a hole, or weakening defect such as smash, multiple float, or loose and weakening slub. b. Replace any part damaged during the manufacturing process, such as needle chew, cut, tear, hole, burn or large exposed drill hole. Unit containing a visible mend will not be acceptable.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
3.	Marking.-					
	a. Mark, ticket, or bundle all component parts of coat and all component parts of trousers, to insure a correct size and uniform shade throughout the garment.					
	MAKE COAT					
4.	Make hanger loop.-					
	a. Fold stripping in half lengthwise, stitch, trim, turn and stitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3
	- or -					
	b. Fold stripping in half lengthwise, turn in raw edges, and stitch 1/16 to 1/8 inch from edge. Selvage edge need not be turned in.	301	SSc-1	10-14	50-3	50-3
5.	Make breast patch pocket.-					
	a. Turn down top of patch pocket, as indicated by notches on pattern and with raw edge turned in stitch 1/16 to 1/8 inch from edge.	301	EFb-1	10-14	50-3	50-3
6.	Make pocket flap and flap buttonhole (type II).-					
	a. Fold flap, as indicated by marks on pattern, turn in raw edges (may be precreased) and stitch 1/16 to 1/8 inch from edge, continuing stitching along folded edge.	301 301	SSc-1 and OSf-1 OSf-1	10-14 10-14	50-3 50-3	50-3 50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
6.	Make pocket flap and flap buttonhole (Type II).- (cont'd)					
	- or -					
	b. Fold flaps as indicated by marks on pattern, seam sides; turn, work out corners and stitch 1/16 to 1/8 inch along sides and bottom folded edge.	301 or 401 and 301 301	SSe-2(a) SSe-2(a) SSe-2(b) and OSf-1	10-14 10-14 10-14 10-14	50-3 50-3 50-3 50-3	50-3 70-2 50-3 50-3
	c. Make a vertical 5/8 ± 1/16 inch finished cut length buttonhole in the center of the flap with purling on the outside and with the inside edge of eyelet 1/2 ± 1/8 inch above bottom edge at center (1/8 inch off center tolerance).	Buttonhole		44-46 per buttonhole including tack	50-3	50-3
7.	Make sleeves.-					
	a. Join the back arm sleeve seam with double-lapped double-stitched seam, with top sleeve over the under sleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
8.	Make collar.-					
	a. Superimpose collar stand interlining on under-collar, matching notches, and seam around top edge of collar stand, 1/16 to 1/8 inch from edge.	301	LSbj-1	10-14	50-3	50-3
	b. Seam the two plies of the collar around top and sides; turn collar, work out points, and stitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
9.	Make left front.- (type II)					
	a. Seam the left fly lining to the left front edge of coat, from notch to notch, turn and stitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3
	b. Seam the other ply of the fly lining to the left facing, from notch to notch, turn and stitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3
	c. Make four 7/8 ± 1/16 inch finished cut length buttonholes in the left facing as indicated by marks on pattern, with inside edge of eyelet 1/2 ± 1/8 inch in from the edge and with the purling on the facing side.	Buttonhole		52-56 per buttonhole including tack	50-3	50-3
	d. Seam left facing to front, as indicated by notches on pattern, below and above fly opening and across lapel to notch, turn and stitch below fly opening 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3
	e. Tack fly facing between buttonholes through fly facing and fly linings (not through front), with a 1 ± 1/8 inch horizontal tack, or a 1/4 to 3/8 inch bartack. An automatic 1/2 inch straight tack may be used.	301 or Bartack or 301		10-14 2 per bartack 28 per tack	50-3 50-3 50-3 50-3	50-3 50-3 50-3 50-3
10.	Make right front.- (type II)					
	a. Seam right facing to coat front from bottom of coat to top and across lapel to notch.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50-3 50-3	50-3 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
11.	Make fronts (type I).-					
	a. Seam facings to right and left fronts and continue stitching across lapel to notch.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50-3 50-3	50-3 70-2
12.	Join shoulder seams.-					
	a. Join shoulder seams with a double-lapped double stitched seam with the backs on top of the fronts.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
13.	Sew on collar, attach hanger.-					
	a. Insert collar between coat and facings and seam to within 1-1/4 inches from end of facing; notch through all plies, turn back top collar and with raw ends at tops of facings turned up, continue stitching undercollar to neck.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2
	b. Trim corners and turn facing, working out lapel points. Points shall not vary in length by more than 1/4 inch.					
	c. Turn under raw edge of top collar and stitch across back 1/16 to 1/8 inch from edge, catching hanger, centered on back, (1/4 inch off-center tolerance). Hanger loop shall finish 2 to 3 inches long.	301	LSd-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
14.	Sew on combination label.-					
	a. Position combination label at center back (1/4 inch off center tolerance), not more than 1/4 inch below collar joining seam and stitch to coat on all four sides. top of label may be caught in collar joining seam - operation 13c.	301	LSbj-1	10-14	50-3	50-3
15.	Stitch facings.-					
	Type I					
	a. Stitch edge of right front and left front 1/16 to 1/8 inch from edge and continue stitching across lapels.	301	SSe-2(b)	10-14	50-3	50-3
	b. Seam the turned top edge of the right and left facing through shoulder, turn in back edge of both facings and stitch to fronts 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	50-3	50-3
	Type II					
	c. Stitch edge of right front and top edge of left front above fly opening 1/16 to 1/8 inch from edge and continue across lapels.	301	SSe-2(b)	10-14	50-3	50-3
	d. Seam the turned top edge of facing through shoulder, turn in back edge of facing on right front and stitch to front 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
15.	Stitch facings.- (cont'd)					
	Type II (cont'd)					
	e. Seam the turned top edge of left facing through shoulder, turn in back edge of the fly facing over the back edge of the fly lining and stitch to front 1/16 to 1/8 inch from edge, through fly lining.	301	LSd-1	10-14	50-3	50-3
16.	Sew on breast patch pocket.-					
	a. Turn in the edges of the pocket (may be pre-creased) and stitch to left front of coat as indicated by marks on pattern 1/16 to 1/8 inch from edge. The finished pocket shall measure 5-1/2 inches wide and 6-3/8 inches deep at center (± 1/8 inch tolerance on both measurements).	301	LSd-1	10-14	50-3	50-3
	b. Tack each end of pocket opening with a 1/4 to 1/2-inch tack or bartack. A 1/2 inch automatic straight tack may be used.	301 or Bartack or 301		10-14 28 per bartack 28 per tack	50-3 50-3 50-3	50-3 50-3 50-3
17.	Sew on pocket flap (type II).-					
	a. Seam flap to jacket as indicated by marks on pattern, turn down flap over pocket and raise stitch 3/16 to 1/4 inch from edge.	301 or 401 and 301	LSb1-2(a) LSb1-2(a) LSb1-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
18.	Set sleeves.-					
	a. Sew in sleeves with a double-lapped double-stitched seam with the front and back parts of the coat over the top of sleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
19.	Sew on snap fastener reinforcement tape.-					
	a. Seam tape to the coat at side seams and under-arm seams of sleeves on outside from bottom of coat to bottom of sleeves or both fronts and back of coat, turn tape to inside with the seam slightly back of edge on the underside and stitch 1/16 to 1/8 inch from edge. Stitch back edge of tape through coat and sleeves, 1/16 to 1/8 inch from edge of tape.	301 or 401 and 301 301	SSe-2(a) SSe-2(a) SSe-2(b) and LSbj-1	10-14 10-14 10-14 10-14	50-3 50-3 50-3 50-3	50-3 70-2 50-3 50-3
20.	Hem bottom of sleeves.-					
	a. Turn up bottom of sleeves as indicated by marks on patterns, turn in raw edges and stitch 1/16 to 1/8 inch from edge and continue stitching, closing ends of hem. Finished hem shall measure 1-1/2 ± 1/4 inches.	301	EFb-1	10-14	50-3	50-3
21.	Make and sew on waistbands.-					
	a. Fold waistbands in half lengthwise and stitch square and rounded ends (type II coat). Rounded end shall be stitched from notch at center front. (This operation may be omitted on square ends (type I coat) and, instead, turn in seam allowances, place waistbands on bottom of coat and proceed with operation "d").	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50-3 50-3	50-3 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
21.	Make and sew on waistbands.- (cont'd)					
	b. Attach socket portion of snap fastener, through stay piece, to underside of left waistband (type II coat only), at rounded end, as indicated by marks on pattern.					
	c. Seam inside edge of waistbands to inside of coat across bottom. On finished type II coat, the left front end (rounded) shall lap over the right front end (square) as indicated by marks on pattern.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2
	d. Fold waistbands over coat, turn in raw edge and stitch across top of waistbands, continue stitching to sides and bottom of waistbands 1/16 to 1/8 inch from edge.	301 301 301	LSd-1 and SSe-2(b) or SSe-1 and OSf-1	10-14 10-14 10-14	50-3 50-3 50-3	50-3 50-3 50-3
	e. Attach stud portion of snap fastener through end of right waistband (type II coat only) to correspond to socket on left end of waistband.					
22.	Attach snap fasteners.-					
	a. Attach 14 socket portions of the fasteners to each side front of coat and top sleeve as indicated by marks on pattern. For sleeve adjustment, attach one socket portion on the inside of the hem of each undersleeve, as indicated by marks on pattern.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
22.	Attach snap fasteners.- (cont'd) b. Attach 14 stud portions of the fasteners to each back of coat and undersleeve as indicated by marks on patterns. The sockets and studs shall be in vertical alignment and shall be evenly spaced (1/4 inch tolerance). For sleeve adjustment, attach one stud portion on the outside, on the middle of the end of each undersleeve. The sockets must correspond to the studs to effect a smooth closure.					
23.	Make buttonholes.- Type I a. Make six 7/8 ± 1/16-inch finished cut length buttonholes on left front as indicated by marks on pattern, with purling on the outside and with the inside edge of eyelets 1/2 ± 1/8 inch from front edge.	Buttonhole		52-56 per buttonhole including tack	50-3	50-3
	Type II b. Make one 7/8 ± 1/16-inch finished cut length buttonhole in center of right waistband (1/4 inch off center tolerance) with inside edge of eyelet 2 ± 1/8 inches from curved edge. Purling shall face wearer when worn.	Buttonhole		52-56 per buttonhole including tack	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
24.	Sew on buttons.-					
	Type I					
	a. Sew six 30-line buttons on right front as indicated by marks on pattern to correspond with buttonholes on left front.	101 or		20-22 per button	20-4	
		301 or		14-16 per button	20-4	20-4
		hand		8 double thread	20-4	
	Type II					
	b. Sew one 24-line button on breast pocket to correspond with buttonhole in flap.	101 or		20-22 per button	20-4	
		301 or		14-16 per button	20-4	20-4
		hand		8 double thread	20-4	
	c. Sew four 30-line buttons on right front to correspond with buttonholes on left front.	101 or		20-22 per button	20-4	
		301 or		14-16 per button	20-4	20-4
		hand		8 double thread	20-4	
	d. Sew one 30-line button on left waistband as indicated by marks on pattern to correspond with buttonhole at right end. Stitching shall not show on outside of left waistband end.	101 or		20-22 per button	20-4	
		301 or		14-16 per button	20-4	20-4
		hand		8 double thread	20-4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
	MAKE TROUSERS					
25.	Make fronts and backs.-					
	a. Fold the outer edge of each trouser leg of front to the inside as indicated by notches on patterns; turn in the raw edge and stitch 1/16 to 1/8 inch from back edge to front, forming a facing to reinforce snap fasteners. Facing shall measure 1 to 1-1/4 inches wide.	301	EFb-1	10-14	50-3	50-3
	b. Fold the outer edge of each trouser leg of back to the inside as indicated by notches on patterns; turn in the raw edge and stitch 1/16 to 1/8 inch from back edge to back forming a facing for reinforcing snap fasteners. Facing shall measure 2 to 2-1/4 inches wide.	301	EFb-1	10-14	50-3	50-3
26.	Make hip patch pocket (type II).-					
	a. Hem top of patch pocket, as indicated by notches on pattern, with raw edge turned in and stitch 1/16 to 1/8 inch from edge.	301	EFb-1	10-14	50-3	50-3
27.	Make hip pocket flap and flap buttonhole (type II).-					
	a. Fold flap as indicated by marks on pattern, turn in raw edges (may be precreased) and stitch 1/16 to 1/8 inch from edge, continuing stitching along folded edge.	301	SSc-1 and	10-14	50-3	50-3
		301	OSf-1	10-14	50-3	50-3
	- or -					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
27.	Make hip pocket flap and flap buttonhole (type II).- (cont'd)					
	b. Fold flaps as indicated by marks on pattern, seam sides, turn, work out corners and stitch 1/16 to 1/8 inch along sides and bottom folded edge.	301 or 401 and 301 301	SSe-2(a) SSe-2(a) SSe-2(b) and OSf-1	10-14 10-14 10-14 10-14	50-3 50-3 50-3 50-3	50-3 70-2 50-3 50-3
	c. Make a vertical 5/8 ± 1/16 inch finished cut length buttonhole in the center of the flap with purling on the outside and with the inside edge of eyelet 1/2 ± 1/8 inch above bottom edge at center (1/8 inch off center tolerance).	Buttonhole		44-46 per buttonhole including tack	50-3	50-3
28.	Sew on hip pocket.- (type II)					
	a. Turn in the edges of the pocket and stitch to left back of trousers 1/16 to 1/8 inch from edges as indicated by marks on pattern. Pockets may be precreased. The finished pocket shall measure 5-1/2 inches wide and 6-3/8 inches deep at center(a ± 1/8 inch tolerance allowed on both measurements).	301	LSd-1	10-14	50-3	50-3
	b. Tack each end of pocket opening with a 1/4 to 1/2 inch tack or bartack. A 1/2 inch automatic straight tack may be used.	301 or Bartack or 301		10-14 28 per bartack 28 per tack	50-3 50-3 50-3	50-3 50-3 50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
29.	Sew on pocket flap (type II).-					
	a. Seam flap to trousers, as indicated by marks on pattern, turn down flap over pocket, and raise stitch 3/16 to 1/4 inch from edge.	301 or	LSb1-2(a)	10-14	50-3	50-3
		401 and	LSb1-2(a)	10-14	50-3	70-2
		301	LSb1-2(b)	10-14	50-3	50-3
30.	Make fly openings.-					
	a. Seam right fly lining on right front, extending from top of trousers to fly notch; turn and stitch 1/16 to 1/8 inch from edge.	301 or	SSe-2(a)	10-14	50-3	50-3
		401 and	SSe-2(a)	10-14	50-3	70-2
		301	SSe-2(b)	10-14	50-3	50-3
	b. Fold back raw edge of fly lining and stitch through front 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	50-3	50-3
	c. Turn back left fly facing, turn in raw edge and stitch through left front, 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	50-3	50-3
	d. Stitch folded edge of left fly 1/16 to 1/8 inch from edge. Fly shall finish 2-1/2 ± 1/4 inches wide.	301	OSf-1	10-14	50-3	50-3
31.	Join crotch seam.-					
	a. Turn crotch seam of right front to the outside and stitch 1/16 to 1/8 inch from edge.	301 or	LSdc-3(a)	10-14	50-3	50-3
		401	LSdc-3(a)	10-14	50-3	70-2
	b. Turn edge of left crotch seam to the inside and double stitch 3/16 to 5/16 inch gage to the right front crotch seam with both rows of stitching through the right fly; continue one row of stitching 1/2 to 3/4 inch above crotch and across base of fly forming a triangle of stitching.	401 and	LSdc-3(b)	10-14	50-3	70-2
		401		10-14	50-3	70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
32.	Join flies.-					
	a. Stitch fly closed, leaving the lower portion open for a distance of 6 ± 1/2 inches on type I trousers and 5 ± 1/2 inches on type II trousers. The top of the flies shall be even and the stitching shall be superimposed on the edge stitching of the left fly.	301		10-14	50-3	50-3
	b. Tack top of fly opening with a 1/4 to 3/8 inch bartack or an automatic 1/2 inch straight tack.	Bartacks or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3
33.	Join backs and fronts.-					
	a. Join seat seam, left over right, with a double-lapped double-stitched seam.	401	LSc-2	10-14	50-3	70-2
	b. Join inseam with fronts over backs with a double-lapped double-stitched seam. The crotch seam shall be centered on the seat seam (1/4 inch off center tolerance).	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
34.	Make and sew on waistband.-					
	a. Turn in the ends of waistbands sufficiently to reinforce the snap fasteners, fold waistband in half lengthwise and stitch 1/16 to 1/8 inch from folded edge.	301	OSf-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
34.	Make and sew on waistband.- (cont'd)					
	b. Seam the inner fold of waistband to the top of trousers on the inside catching turned in ends of waistband in the stitching.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2
	c. Turn under free raw edge of waistband and stitch through top of trousers, on outside, 1/16 to 1/8 inch from edge, catching turned in ends of waistband in the stitching.	301	LSd-1	10-14	50-3	50-3
	d. Continue stitching across each end of waistband. (Finished waistband shall measure 1-3/4 ± 1/4 inches wide).	301	SSc-1	10-14	50-3	50-3
	- or -					
	e. After performing operation "a", the waistband may be seamed to top of trousers by turning in the raw edges of the waistband, inserting the top of the trouser between the fold and stitching 1/16 to 1/8 inch from edge. Continue stitching across each end of waistband. (Operation "a" may be omitted with either alternate and the top fold of waistband may be stitched as a continuation of either operation d or e.)	301 301 301	BSc-1 and SSc-1 OSf-1	10-14 10-14 10-14	50-3 50-3 50-3	50-3 50-3 50-3
35.	Sew on combination label.-					
	a. Place combination label to right of seat seam with top of label not more than 1/4 inch below waistband joining seam, and seam to trouser. Top of label may be caught in waistband stitching (see operations 34b or 34e) and remaining three sides seamed.	301	LSbj-1	10-14	50-3	50-3

Source: https://assist.dla.mil - Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
36.	Hem bottoms.-					
	a. Turn up bottom of legs, as indicated by marks on patterns, and with the raw edge turned in, stitch 1/16 to 1/8 inch from edge. Continue stitching along ends of hems. Hems shall finish 1-1/4 ± 1/4 inches wide.	301	EFb-1 and	10-14	50-3	50-3
		301	SSc-1	10-14	50-3	50-3
37.	Sew on button (type II).-					
	a. Sew one 24-line button on hip pocket, to correspond with buttonhole on flaps.	101 or		20-22 per button	20-4	
		301 or		14-16 per button	20-4	20-4
		Hand		8 double thread	20-4	
38.	Attach fasteners.-					
	a. Attach socket portion of fasteners to front of trousers as indicated by marks on pattern.					
	b. Attach stud portion of fasteners to the back of the trousers as indicated by marks on pattern. The sockets and studs shall be in vertical alignment and shall be evenly spaced (1/4 inch tolerance).					
	c. Attach socket portion of fasteners to the top of front of trousers at waistband as indicated by marks on pattern. Sockets shall correspond to studs of fasteners to provide a smooth closure.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
39.	Cleaning - coat and trousers.- a. Trim all ends of stitching. Remove loose thread, spots and stains.					
40.	Pressing - coat and trousers.- a. Press coat and trousers smoothly.					
41.	Close all snap fasteners. Button all buttons.-					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements.- Unless otherwise specified, coats and trousers shall conform to the measurements specified in table III.

TABLE III.- Finished measurements (inches)

	Medium	Large	Tolerance Plus	Tolerance Minus
Type I				
Coat				
1/2 Chest 1/	24	26	1/2	1/2
1/2 Waist 2/	23-1/4	24-3/4	1/2	1/2
Back length 3/	30-1/2	31	1/2	1/2
Sleeve length (inseam) 4/	15-3/4	16-1/4	1/2	1/2
Trousers				
1/2 Waist 5/	19-1/2	22-1/2	3/4	1/2
Inseam 6/	29	29-1/2	1/2	1/2
Type II				
Coat				
1/2 Chest 1/	24	26	1/2	1/2
1/2 Waist 2/	23-1/4	25-1/4	1/2	1/2
Back length 3/	30-1/2	31	1/2	1/2
Sleeve length (inseam) 4/	15-1/4	15-3/4	1/2	1/2
Trousers				
1/2 Waist 5/	19-1/2	21-1/2	3/4	1/2
Inseam 6/	28-1/2	29-1/2	3/4	3/4

Coat

1/ One-half chest. With coat snapped, buttoned and laid flat, measure across front at base of armhole, from folded edge to folded edge.

2/ One-half waist. With coat snapped, buttoned and laid flat, measure through center of waistband from folded edge to folded edge.

3/ Back length. Measure from base of collar to bottom of waistband, at center of back.

4/ Sleeve length. Measure from base of armhole to bottom of sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Trousers

5/ One-half waist. With trousers snapped, buttoned and laid flat, measure through center of waistband from folded edge to folded edge.

6/ Inseam. Measure from the crotch along inseam to bottom of leg.

3.9 Workmanship.- The finished garments shall conform to the quality of product established by this specification. The occurrence of defects shall not exceeed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- The preproduction sample (when required) submitted in accordance with 3.2, shall be inspected as specified in 4.3.2.1 through 4.3.2.5 for compliance with design, workmanship and dimensional requirements.

4.3 Inspection.- Inspection shall be in accordance with provisions of MIL-STD-105 except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and material shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.3.2 Examination of the end item.- The end item shall be examined for defects listed in 4.3.2.1 through 4.3.2.5. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.3. The sample unit shall be one coat, one pair of trousers or one suit, as applicable. Defects shall be classified as listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

4.3.2.1 General defects.-

Defect	Classification Major	Minor A	Minor B
Material defects and damages			
a. Any weakening defect such as a smash, multiple float, or large, loose slub.	X		
b. Any hole, needle chew, cut, tear, mend or burn.	X		
c. Unsightly slub or shade bar on outside.	X		
Cleanness			
a. Spot or stain on outside.		X	
b. One or more shade tickets not removed.			X
c. Shade marking visible on outside.		X	
d. Thread ends not trimmed or loose threads not removed throughout trousers.			X
Component and assembly			
Any component part or required operation omitted (unless otherwise classified herein).	X		
Cutting			
Any component part not cut in conformance with specified requirements.	X		
Pressing			
a. Burned or scorched.	X		
b. Poorly pressed, or pressing omitted.		X	
Seams and stitching			
a. Accuracy of seaming:			
1. Seams twisted, puckered, or pleated unless otherwise indicated.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
a. Accuracy of seaming: (cont'd)			
2. Ends of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X	
3. Thread breaks stitched less than 1/2 inch beyond each end of break.			X
4. Ends of a continuous line of stitching overlapped less than 1/2 inch.			X
5. Any part of garment caught in an unrelated operation or stitching.	X		
b. Gage of stitching (raised or double stitching):			
1. Unevenly gaged or various stitching not uniform.			X
2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
c. Stitches broken or missing:			
1. All seams eccept bottom hem:			
- up to 1/4 inch, inclusive			X
- over 1/4 inch to 1 inch, inclusive		X	
- over 1 inch.	X		
2. On bottom hem more than 1/2 inch.			X
d. Raw edge more than 1/4 inch long.			X
e. Runoffs			
1. Joining seams. When resulting in an open seam use open seam classification.			
2. Edge or raised stitching (when not resulting in an open seam).			
- 1/4 inch to 1/2 inch, inclusive			X
- over 1/2 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
f. Seam and stitch type:			
1. Wrong seam or stitch type.			X
2. Looper thread on outside when stitch type 401 is used.	X		
g. Stitch tension (except on bartacks)			
1. Loose tension, resulting in a loose seam.	X		
2. Loose tension on edge or raised stitching resulting in loosely exposed bobbin or top thread.		X	
3. Tight tension (stitches break when normal strain is applied to the seam or stitching).	X		
Note: Puckering is evidence of tight tension. When puckering is evident the seam shall be tested by exerting pull in the lengthwise direction of the seam.			
h. Loose tension on one or more bartacks.			X
i. Stitches per inch (to be scored only when condition exists on major portion of seam)			
- less than minimum specified		X	
- more than maximum specified.			X
Buttonhole(s) (construction)			
a. One or more omitted or added.	X		
b. Stitching not securely caught in fabric (stitches can be pulled away from fabric).	X		
c. Finished cut length of buttonholes (except on pocket flaps) less than 13/16 or more than 15/16 inch long.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Buttonhole(s) (construction) (cont'd)			
d. Finished cut length of pocket flap buttonholes less than 9/16 or more than 11/16 inch long.			X
e. Wrong type.		X	
f. Ragged edges.			X
g. Gimp omitted:			
- on one buttonhole			X
- on two or more buttonholes.		X	
h. End not securely tacked:			
- in one buttonhole			X
- in two or more buttonholes.		X	
i. One or more broken, or more than two skipped stitches in one or more buttonholes.		X	
j. Type I coat front and type II pocket flap buttonholes (coat or trousers) finished with purling on inside.		X	
k. Type II coat front buttonholes finished with purling on fly lining side.		X	
l. Type II coat waistband buttonhole finished with purling away from wearer when worn.		X	
m. Uncut buttonhole(s).			X
Buttons			
a. Missing, insecure or broken:			
- one button			X
- two buttons		X	
- three or more buttons.	X		
b. Wrong color, type or size.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Combination label			
a. Missing, incorrect or illegible.		X	
b. Not stitched on all sides.			X
c. Not in proper location on coat or trousers.			X
Tacks or bartacks (coat pocket, type II coat fly front, trouser pocket and top of trouser fly opening)			
a. Missing, or misplaced not serving intended purpose:			
- one tack or bartack			X
- two or more tacks or bartacks.		X	
b. More or less than specified length.			X

4.3.2.2 Defects applicable to specific parts of coat.-

Defect	Classification Major	Minor A	Minor B
Collar			
a. Top collar twisted or tight, causing edge to curl.	X		
b. Edge uneven or not forced out.			X
c. Fullness on top collar.		X	
d. Points poorly shaped or not uniformily shaped.		X	
e. Fullness at collar joining seam.		X	
f. Body neckline puckered or pleated at joining seam.		X	
g. Lapel points varying in length by more than 1/4 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Snap fasteners			
a. Studs and sockets not in corresponding positions, causing bulge, when engaged.	X		
b. Out of vertical alignment by more than 1/4 inch.		X	
c. Unevenly spaced by more than 1/4 inch.		X	
d. Not specified type or size.		X	
e. Missing, broken or otherwise defective, i.e., not functioning properly.	X		
f. Stud(s) or socket(s) not clinched.	X		
g. Not reinforced, where required.	X		
Fronts			
a. Left front shorter than right front at bottom, when buttoned by:			
- 1/4 inch up to 1/2 inch, inclusive		X	
- more than 1/2 inch.	X		
b. Left front longer than right front at bottom, when buttoned by:			
- 3/8 inch up to 1/2 inch, inclusive		X	
- more than 1/2 inch.	X		
c. Bottom corner of right front exposed more than 1/4 inch below left front: when buttoned.		X	
d. Front uneven at neck when buttoned by:			
- 1/8 inch up to 3/8 inch, inclusive			X
- more than 3/8 inch.		X	
e. Button(s) and buttonhole(s) not aligned causing distortion when buttoned.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Fronts (cont'd)			
f. Front edges uneven, or not properly forced out.		X	
g. Facings tight, short, twisted or full, causing distortion on fronts.	X		
Fly front (type II only)			
a. Bartacks or tacks stitched through left front.			X
b. Fly lining tight, short or twisted, causing fullness or twist on front.	X		
c. Fly lining or buttonhole fly edge exposed beyond front edge.			X
d. Fullness or pleats on fly lining.			X
e. Lining not caught in back edge seam of facing to front.		X	
Bottom(s) of side(s) and sleeve(s):			
a. Uneven, when fastened by:			
- 1/8 inch to 3/8, inclusive			X
- more than 3/8 inch.		X	
Breast pocket			
a. Misplaced.		X	
b. Set on crookedly.		X	
c. Less than 5-3/8 inches wide or less than 6-1/4 inches deep at center.		X	
d. More than 5-5/8 inches wide or more than 6-1/2 inches deep at center.			X
e. Full or tight at opening.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Breast pocket flap (type II only)			
a. Out of alignment by more than 1/2 inch.		X	
b. Not properly covering pocket opening (i.e., side edge on pocket exposed beyond end of flap).			X
c. Buttonhole off center by more than 1/4 inch.		X	
d. Button out of alignment with buttonhole in flap causing pocket to pull up or flap to twist, pull or bulge when buttoned.			X
Bottom waistband			
a. Fullness, twist or pleats on outside band.		X	
b. Outer or under side of band tight, causing fullness or pleats on coat at joining to band.		X	
c. Rounded end poorly shaped (type II only).			X
d. Button stitches exposed on outside of band (type II only).			X
e. Left front end extending less than 1-1/2 inches or more than 2-1/4 inches beyond right front edge (type II only).			X
f. Irregular in width by 1/4 inch or more.		X	
Placement of buttonholes			
a. Front buttonholes (except on type II waistband):			
1. Inside edge of eyelet less than 3/8 inch or more than 5/8 inch from front edge.		X	
2. Out of vertical alignment by more than 1/4 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Placement of buttonholes (cont'd)			
b. Type II waistband buttonhole:			
1. More than 1/4 inch off center (widthwise).			X
2. Inside edge of eyelet less than 1-7/8 inches or more than 2-1/8 inches from curved edge.		X	
Sleeves and armholes			
a. Tight, causing puckers or pleats on body parts.	X		
b. Distance of backarm seams of sleeve from shoulder seams unequal by 3/4 inch or more at armhole.		X	
c. Sleeve finishing on top of body at armhole.		X	
d. Underarm on top of top sleeve at backarm seam.			X
e. Sleeve hem less than 1-1/4 inches or more than 1-3/4 inches wide.			X
f. Sleeve bottoms hemmed before joining of sleeve seams.		X	
g. Hem twisted.		X	
Reinforcement tapes			
a. Excessively taut or loose, causing puckers, pleats, or bulging.		X	
b. Exposed beyond edges of side or underseams for a distance of 1 inch or more.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

4.3.2.3 Defects applicable to specific parts of trousers.-

Defect	Classification Major	Minor A	Minor B
Waistband			
a. Top of trousers puckered, pleated or twisted at waistband stitching.	X		
b. Less than 1-1/2 inches or more than 2 inches wide.		X	
Facing (reinforcements)			
a. Twisted, pleated or puckered, causing distortion on outside.	X		
b. Front facing(s) less than 1 inch or more than 1-1/4 inches wide.		X	
c. Back facing(s) less than 2 inches or more than 2-1/4 inches wide.			X
Snap fasteners			
a. Studs and sockets not in corresponding positions, causing bulge, when engaged.	X		
b. Out of vertical alignment by more than 1/4 inch.		X	
c. Unevenly spaced by more than 1/4 inch.		X	
d. Not specified type or size.		X	
e. Missing, broken or otherwise defective, i.e., not functioning properly.	X		
f. Stud(s) or socket(s) not clinched.	X		
g. Not reinforced, where required.	X		
Flies			
a. Opening less than 5-1/2 inches or more than 6-1/2 inches long. (type I)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Flies (cont'd)			
b. Opening less than 4-1/2 inches or more than 5-1/2 inches long. (type II)			X
c. Twisted, puckered or pleated at base.		X	
d. Finished less than 2-1/4 inches or more than 2-3/4 inches wide.			X
e. Stitching at base extending more than 3/4 inch above crotch.			X
f. Fullness, twists or puckers on linings causing distortion on outside.	X		
g. Front opening stitched 1/8 inch or more below bartack at end of fly opening.			X
Crotch seam			
a. Crotch seam not overlapping right fly seam at base of fly or overlapping the seam by more than 1/4 inch.		X	
b. Not centered on seat seam by more than 1/4 inch (center to center).			X
Inseams			
a. Twisted.		X	
b. Back lapped over front.		X	
Leg hem(s)			
a. Less than 1 inch or more than 1-1/2 inches wide.			X
b. Twisted, puckered or pleated.		X	
c. Facings stitched on top of hem.			X
d. Stitching across width of hem at back edge of facing omitted.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Hip pocket (type II only)			
a. Misplaced.		X	
b. Set on crookedly.		X	
c. Less than 5-3/8 inches wide or less than 6-1/4 inches deep at center.		X	
d. More than 5-5/8 inches wide or more than 6-1/2 inches deep at center.			X
e. Full or tight at opening.			X
Hip pocket flap (type II only)			
a. Out of alignment by more than 1/2 inch.		X	
b. Not properly covering pocket opening (i.e., side edge on pocket exposed beyond end of flap).			X
c. Buttonhole off center by more than 1/4 inch.		X	
d. Button out of alignment with buttonhole in flap causing pocket to pull up or flap to twist, pull or bulge when buttoned.			X

4.3.2.4 Suit (when coat and trousers are procured as a unit).-

Defect	Classification Major	Minor A	Minor B
Suit			
1. Mismatched for size.	X		
2. Mismatched for shade.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

4.3.2.5 Size measurement.-

Coat

1/2 chest 1/2 waist Back length Sleeve length (inseam)	Any measurement deviating from dimension and tolerance specified in table III shall be scored as a size measurement defect.
Unequal length of sleeves	Sleeve lengths uneven by more than 1/2 inch shall be scored as a size measurement defect.

Trousers

1/2 waist inseam	Any measurement deviating from dimension and tolerance specified in table III shall be scored as a size measurement defect.
Unequal length of legs	Leg lengths uneven by more than 1/2 inch shall be scored as a size measurement defect

4.3.3 Acceptable quality levels and inspection levels.- The inspection levels and acceptable quality levels (AQL's), expressed in defects per hundred units (DHU) shall be as follows:

	AQL's	Inspection levels
For defects listed in 4.3.2.1 through 4.3.2.4 (when coat and trousers are procured as a unit):		II
Major	4.0	
Major and Minor A (combined)	15.0	
Total (Major, Minor A and Minor B combined)	40.0	
For defects listed in 4.3.2.1 and 4.3.2.2 (coat only)		II
Major	2.5	
Major and Minor A (combined)	10.0	
Total (Major, Minor A and Minor B combined)	15.0	
For defects listed in 4.3.2.1 and 4.3.2.3 (trousers only):		II

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

	AQL's	Inspection level
Major	2.5	
Major and Minor A (combined)	10.0	
Total (Major, Minor A and Minor B combined)	15.0	
For defects listed in 4.3.2.5		S-3
One class	4.0	

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine compliance with the packaging, packing and marking requirements of Section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examination	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Material	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, open and non-continuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag. Bulged or distorted container.
Content	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Folding.-

5.1.1.1.1 Coat.- Each buttoned coat shall be laid front down, the sides and sleeves folded in over the back and the bottom brought up to the shoulders to

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

approximate dimensions of 16-1/2 by 11-1/2 inches. The size label shall be clearly visible in front so as to permit ready identification. Each folded coat shall be individually inserted in a snug-fitting polyethylene bag as hereinafter specified.

5.1.1.1.2 Trousers.- Each pair of trousers shall be neatly folded to approximate dimensions of 16-1/2 inches by 11-1/2 inches and individually inserted in a snug-fitting polyethylene bag as hereinafter specified.

5.1.1.1.3 Suit.- One coat, folded as specified in 5.1.1.1.1 and one pair of trousers, folded as specified in 5.1.1.1.2, comprising a suit of one type, class and size only, shall be inserted together into a snug-fitting polyethylene bag as hereinafter specified.

5.1.1.2 Polyethylene bag.- The bag shall be flat style, made of clear polyethylene film of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4-inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Level C.- Coats only, trousers only, or complete suits shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B or C as specified. (See 6.2)

5.2.1 Level A.-

5.2.1.1 Coat.- Thirty coats of one type, class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to V3c of PPP-B-636. Alternatively, shipping containers shall conform to style PSC, V11c of MIL-B-43291. Level A packages shall be packed flat, two in length, one in width and 15 in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 17 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be waterproofed in accordance with the appendix of PPP-B-636. Each container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of the applicable container. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type and class may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

5.2.1.2 Trousers.- Sixty pairs of trousers of one type, class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to V3c of PPP-B-636. Alternatively, shipping containers shall conform to style RSC, V11c of MIL-B-43291. Level A packages shall be packed flat, two in length, one in width and 30 in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 17 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be waterproofed in accordance with the appendix of PPP-B-636. Each container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of the applicable container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type and class may be packed within the same container.

5.2.1.3 Suit.- Twenty suits of one type, class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to V3c of PPP-B-636. Alternatively, shipping containers shall conform to style RSC, V11c of MIL-B-43291. Level A packages shall be packed flat, two in length, one in width and 10 in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 17 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be waterproofed in accordance with the appendix of PPP-B-636. Each container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of the applicable container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type and class may be packed within the same container.

5.2.2 Level B.-

5.2.2.1 Coat.- Thirty coats of one type, class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

shall be packed flat two in length, one in width and 15 in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 17 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method II in the appendix of the container specification. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one type and class may be packed within the same container.

5.2.2.2 Trousers.- Sixty pairs of trousers of one type, class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, two in length, one in width and 30 in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 17 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method II in the appendix of the contaier specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type and class may be packed within the same container.

5.2.2.3 Suit.- Twenty suits of one type, class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, two in length, one in width and 10 in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 17 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method II in the appendix of the container specification. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one type and class may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

5.2.2.4 When specified, shipping containers shall be fabricated from V3c fiberboard (see 6.2).

5.2.3 Level C.- Coats only, trousers only, or suits packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes.- Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.3.2 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
QUANTITY
TYPE, CLASS & SIZE

6. NOTES

6.1 Intended use.- The type I suit is intended for wear as a pajama suit for male orthopedic patients and the type II suit is intended for wear by male ambulatory orthopedic patients.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Types and sizes required (see 1.2).
c. If preproduction sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
e. Whether V-board containers are required for level B shipments (see 5.2.2.4).

6.3 Samples.- For access to guide sample and standard sample address the procuring office issuing the invitation for bid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

6.4 Supersession data.- Included in this revision, as type I, are requirements formerly in MIL-P-1937, Pajama, Suit, Orthopedic (Coat and Trousers); and as type II, are the requirements formerly included in MIL-S-2022, Suit, Convalescent, Orthopedic (Coat and Trousers).

6.5 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensiveness of the changes.

Custodians:

Army - GL
Navy - MS
Air Force - 03

Preparing activity:

Army - GL

Project No. 6532-1007

Review activities:

Army - MD
Navy - MS
Air Force - 03
Defense Supply Agency - DM

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Documents.

☆ U. S. GOVERNMENT PRINTING OFFICE-1987: 253-227X1370

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

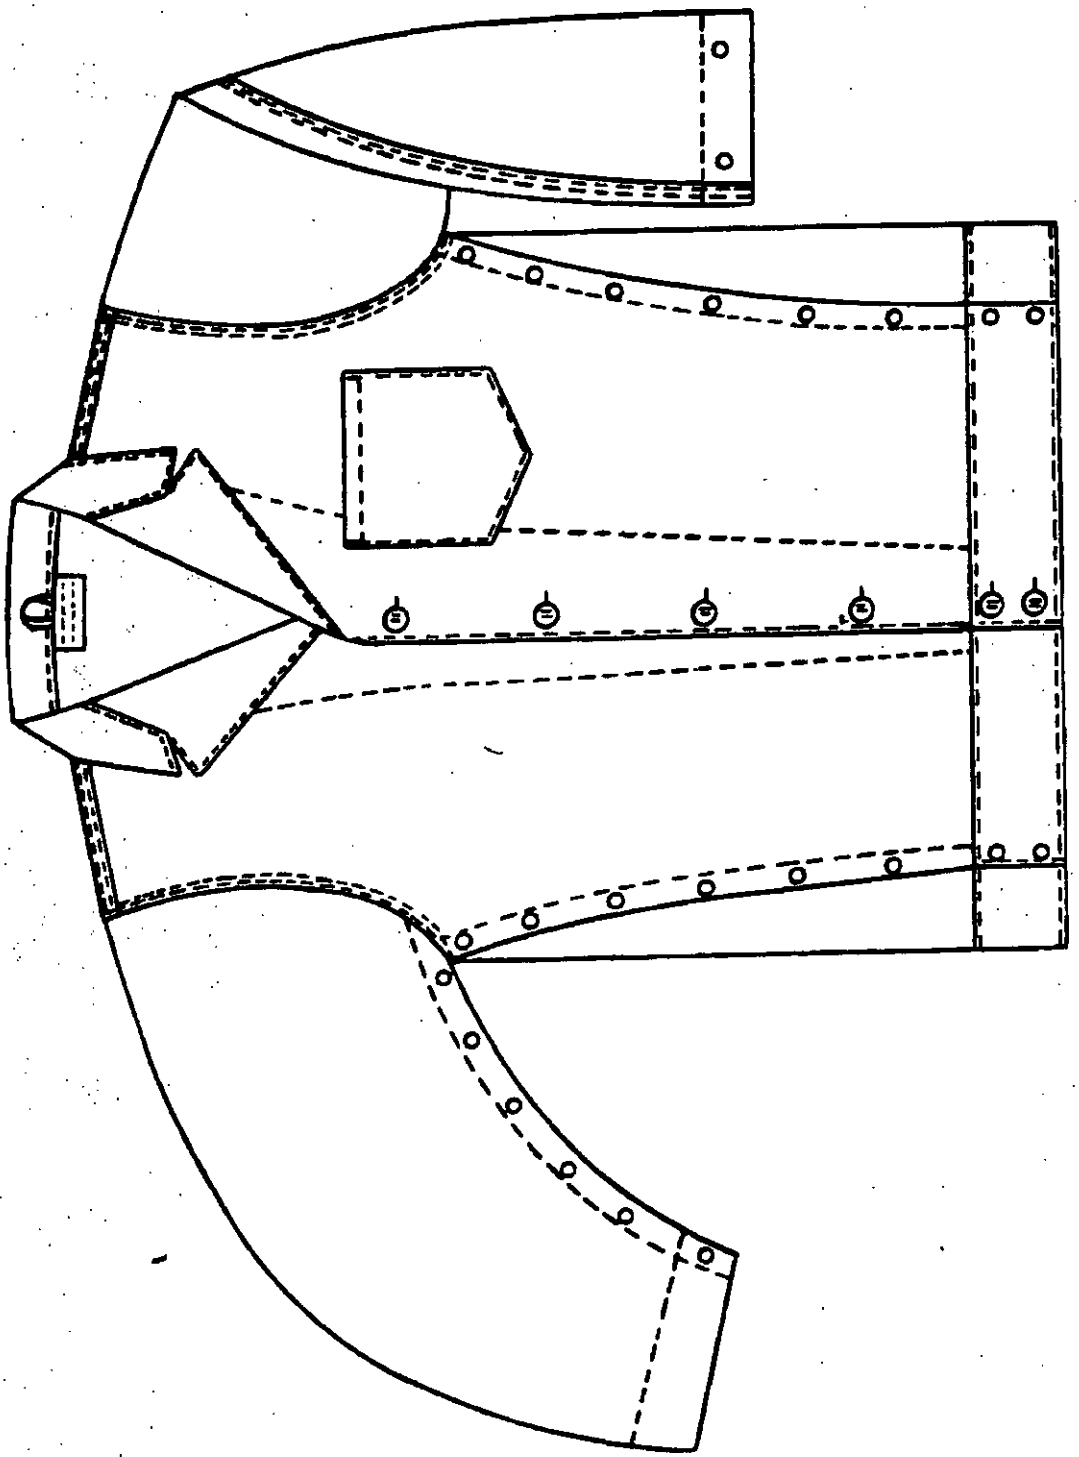


FIGURE 1. COAT, MAN'S ORTHOPEDIC, TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

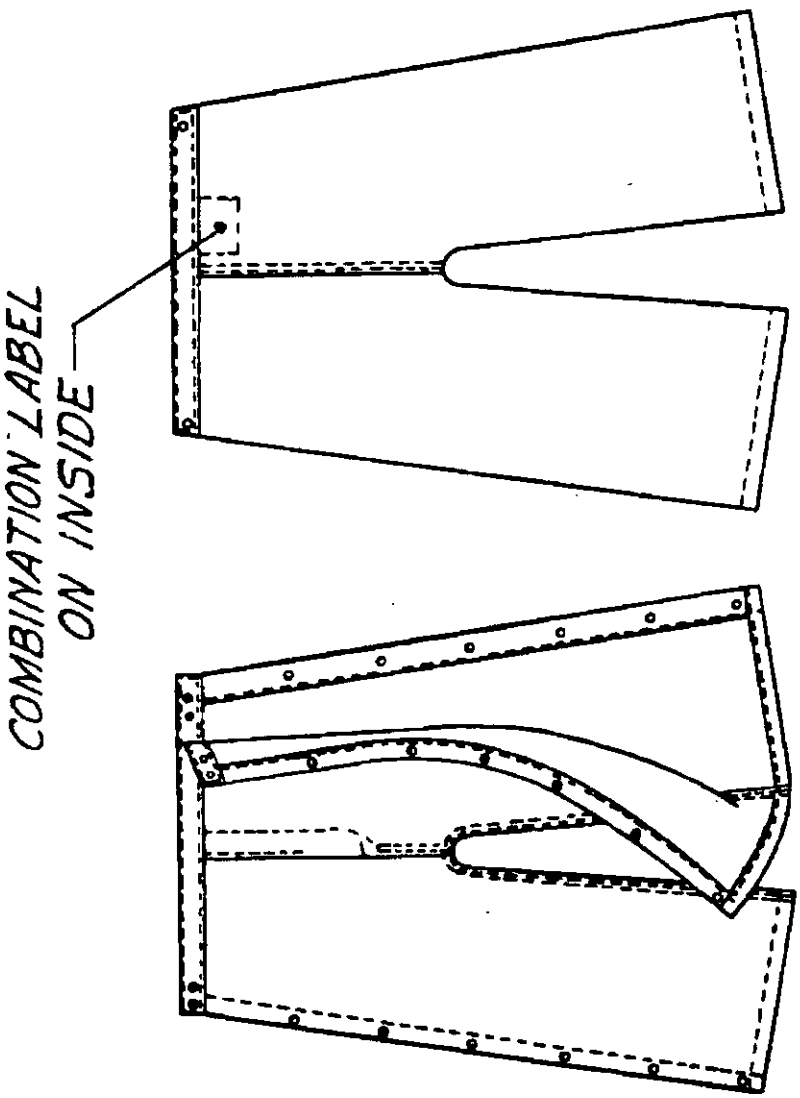


FIGURE 2. TROUSERS, MAN'S ORTHOPEDIC, TYPE-I

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

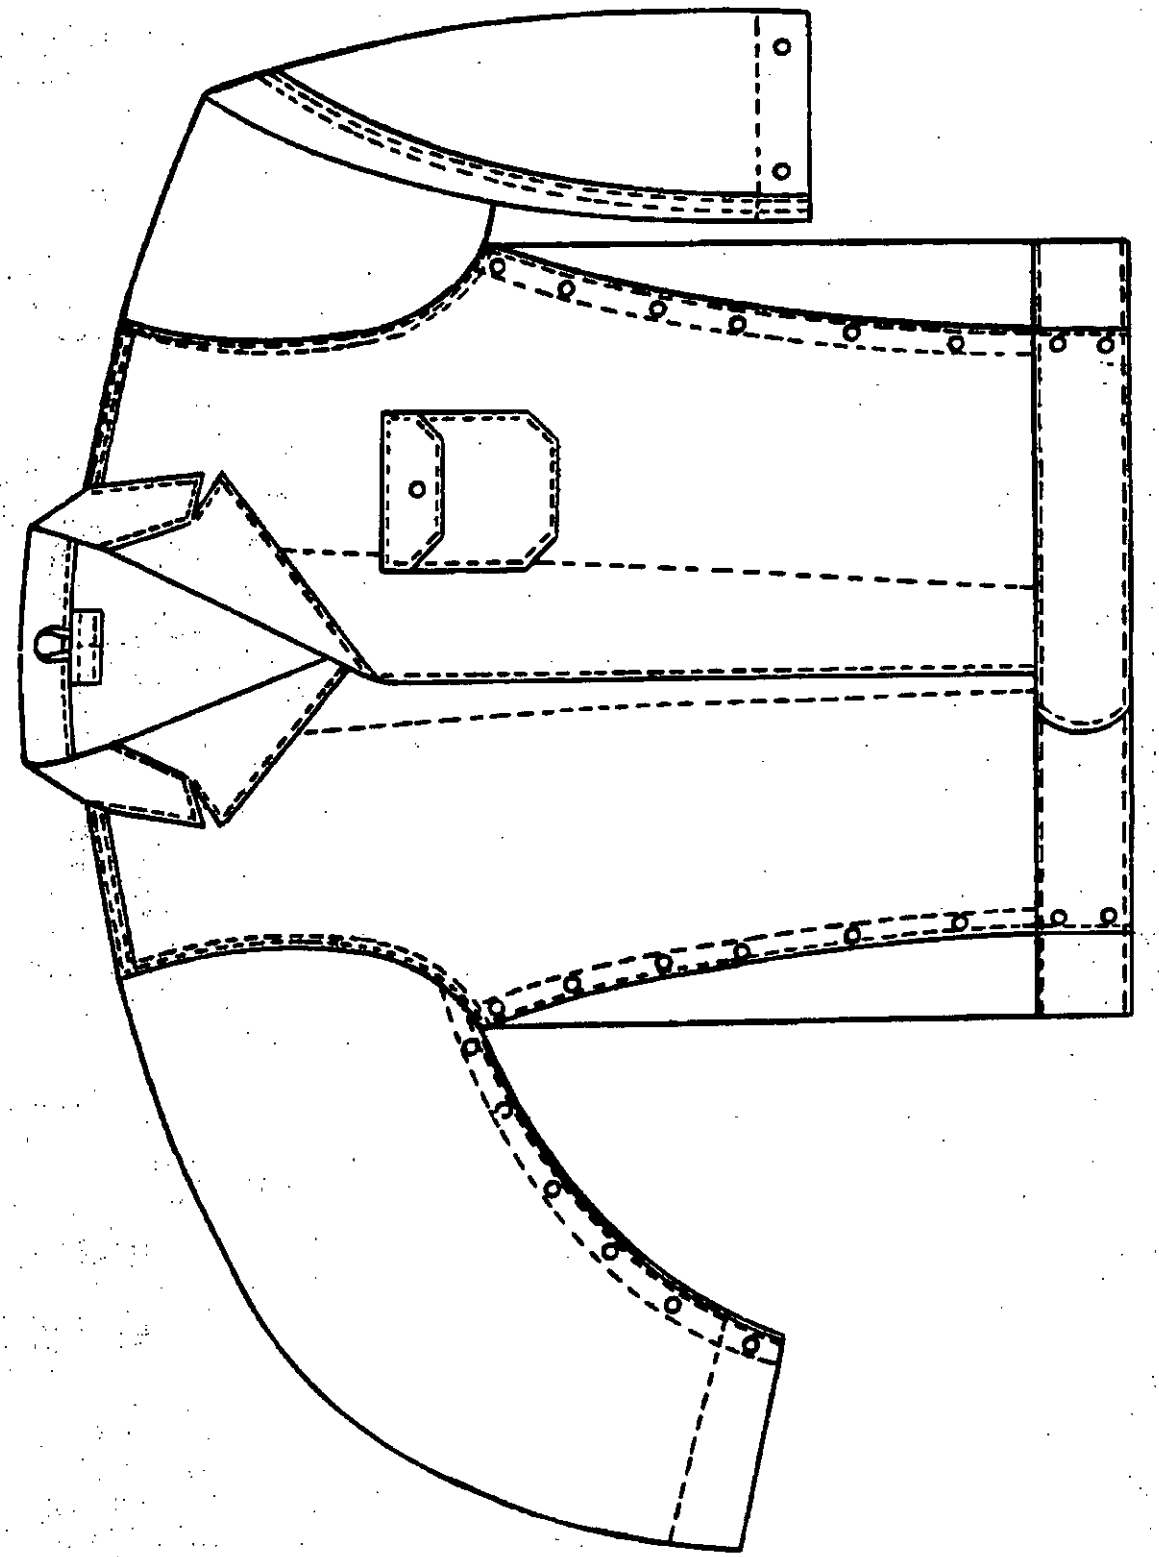


FIGURE 3. COAT, MAN'S ORTHOPEDIC, TYPE II

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

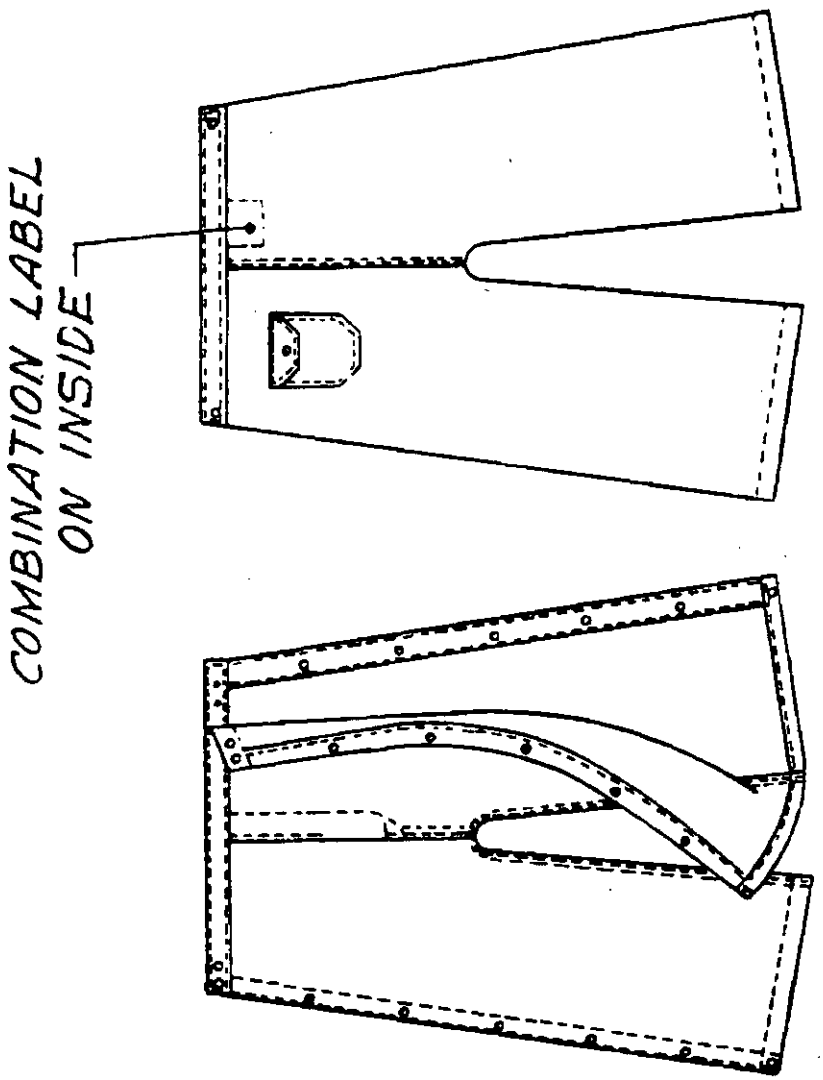


FIGURE 4. TROUSERS, MAN'S ORTHOPEDIC, TYPE-II

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Suits, Men's, Orthopedic (Coat and Trousers) - MIL-S-1937C

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:51Z
Check the source to verify that this is the current version before use.