MIL-T-1774E

26 May 1976

SUPERSEDING
MIL-T-1774D
12 August 1970

MILITARY SPECIFICATION

TABLE, FOOD PREPARATION

(BAKERY PLANTS, FIELD, PORTABLE AND MOBILE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of bread molding table with folding legs.

* 2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-698	-	Steel, Sheet and Strip, Low Carbon
RR-C-271	-	Chains and Attachments, Welded and Weldless
MMM-A-181	-	Adhesive, Phenol, Resorcinol, or Melamine Base
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-C-650	-	Crates, Wood, Open and Covered

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes

FSC 7320

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property

DRAWINGS

ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

5-11-13 - Table, Food Preparation (Bakery Plants, Field, Portable and Mobile) Assembly and Details
5-11-14 - Table, Food Preparation (Bakery Plants, Field, Portable and Mobile) Details

(Miniature copies of Drawings 5-11-13 and 5-11-14, identified herein as figures 1 and 2 respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A108 - Cold-Finished Carbon Steel Bars and Shafting
D260 - Boiled Linseed Oil
A575 - Merchant Quality Hot Rolled Carbon Steel Bars
D2016 - Moisture Content of Wood

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3, and 6.3).

3.2 Materials. aterials not definitely specified shall be of the quality normally used by the manufacturer in his standard food preparation table, provided the completed item complies with all provisions of this specification.

3.2.1 Carbon steel.

3.2.1.1 Sheet and strip. Carbon steel sheet and strip shall conform to QQ-S-698.

3.2.1.2 Bars. Cold finished carbon steel bars shall conform to ASTM A108. Hot rolled carbon steel bars shall conform to ASTM A575.

* 3.2.2 Lumber. Lumber for the table top shall be hard maple, birch, pecan, or rock elm. All lumber shall be thoroughly and uniformly kiln dried, without casehardening or honeycombing, to a moisture content between 6 to 10 percent at the time of fabrication, when tested as specified in 4.4.2.1.

3.2.3 Adhesive. Adhesive shall conform to any type and grade specified in MMM-A-181.

3.2.4 Screws, rivets, bolts, and nuts. Screws, rivets, bolts, and nuts of the size and design shown on the drawings shall conform to the manufacturer's standard commercial items.

3.2.5 Chain. The chain used to secure the snaphook shall be steel conforming to type II, class 6 of RR-C-271.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the currentversion before use.

* 3.2.6 Linseed oil, boiled. Boiled linseed oil shall conform to type I or II of ASTM D260.

3.3 Construction. The tables shall be constructed as specified herein and as shown on Drawings 5-11-13 and 5-11-14.

* 3.3.1 Table top. The table top shall be fabricated from wood specified in 3.2.2. Only one species shall be used in any one table top. Top pieces shall be the full length of the table and not more than 6 inches wide. The pieces shall be flat and parallel to opposite surfaces within 1/8 inch. Pieces shall be assembled so that not more than three adjacent pieces have annual rings in the same direction, as observed from the end of the pieces. All pieces shall be glued and bolted together with four 1/4 inch minimum diameter threaded steel tie rods. Tie rods shall be equally spaced 17-1/2 inch center to center about the table top centerline. The bolt holes shall be counterbored at each end to receive washers and nuts. After the rods are inserted and nuts tightened, the counterbores shall be plugged with tight-fitting glued dowels of the same wood as the table top and sanded smooth with the vertical sides of the tables. Assembled tops shall not be warped more than 1/4 inch in any direction. The work surface shall be free from decay, loose knots, sound tight knots over 1/4 inch in average diameter, larvae channels, shake, split, warp, or brashness. No filler of any kind shall be used in the joints on the working surface.

3.3.1.1 Gluing. Adhesive specified in 3.2.3 shall be uniformly applied to joint surfaces of wood pieces. Assembly, clamping time, and pressure shall be in accordance with the adhesive manufacturer's recommendations. Glued joints shall be tight throughout their entire length.

3.3.2 Legs. Leg assemblies shall be fabricated of the materials specified under 3.2.1. The leg assemblies shall be attached to the table top as shown on Drawing 5-11-13.

3.3.3 Riveting. Rivets shall be securely set except where components are hinged. Hinged components shall be riveted so as to permit movement without being loose.

3.4 Finish.

* 3.4.1 Wood. All surfaces and edges of wooden components shall be sanded smooth. The table top shall be given a pure boiled clear linseed oil finish specified in 3.2.6.

3.4.1.1 Steel. Steel parts shall be zinc-plated after fabrication and prior to assembly. There shall be no indications of peeling, blistering, pitting, rust, or incomplete coverage.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the currentversion before use.

3.5 Identification marking. The table shall be marked for identification in accordance with MIL-STD-130. The marking shall be on a securely attached corrosion-resistant metal plate located as shown on Drawing 5-11-13.

3.6 Workmanship. Rivets shall be tightly driven, fully peened, and except for hinged components, shall completely fill the holes. Holes for bolts, screws, and rivets shall be drilled or punched to insure alignment. All burrs shall be removed. Wood screws shall be screwed into place and not driven. Nuts shall be drawn tight. All sharp edges and slivers shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a preproduction sample is required, it shall be examined for the defects in table I and dimensions specified, and tested in accordance with 4.4.1. Failure to pass the test shall be cause for rejection of the preproduction sample. The presence of any defects listed in table I or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.4 Quality conformance inspection. Except where otherwise indicated hereinafter, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

* 4.4.2 In-process inspection.

4.4.2.1 Moisture content of wood. The moisture content of wood shall be determined by the electric meter method specified in ASTM D2016 to determine compliance with 3.2.2. The sample unit shall be one piece of wood. Three determinations shall be taken from each sample, and the result shall be the average of the three determinations. The lot shall consist of the amount of wood offered for inspection at one time. The test shall be made at the time of fabrication. The inspection level shall be S-4 with an AQL of 2.5 expressed in terms of defects per hundred units.

4.4.2.2 Visual examination of operations. Examination of the glueing operation, tie rod installation, and application of linseed oil shall be made to determine conformance with 3.3.1, 3.3.1.1 and 3.4.1. Whenever a deviation is noted, correction shall be made to affected items and process.

4.4.3 End item inspection. The lot shall consist of all tables offered for inspection at one time. The sample unit shall be one completely assembled table.

4.4.3.1 Visual examination. Examination shall be made of the end item for defects in table I. The inspection level shall be level II with acceptable quality levels (AQL's) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish			
Table top	Table top not sanded smooth	X	
Metallic plating	Indication of rust		X
	Missing	X	
	Peeled, incomplete coverage, blistered, or pitted		X
Construction and workmanship	Any component missing, distorted, damaged, or not functional	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship (cont'd)			
Table top	Pieces not full length of table, or more than 6 inches wide	X	
	Crevices or open joints	X	
	Decay, loose knots, larvae channels, shake, split, warp or brashness	X	
	Filler used in joints	X	
	Not hard maple, rock elm, birch or pecan	X	
	Knots over 1/4 inch average diameter	X	
	Ends of strips not flush to each other	X	
	Flat head bolts not flush with top	X	
	Annual rings of top pieces not located as specified		X
	Warped more than 1/4 inch in any direction (measure, if in doubt)	X	
	Not flat or opposite surfaces of pieces not parallel within 1/8 inch	X	
Battens	Heads of wood screws protrude above surface	X	
	More than one but less than four wood screws missing		X
	Four or more wood screws missing	X	
Leg assemblies	Not securely attached to table top	X	
	Two or more bolts missing at crossbar	X	
	Less than two bolts missing at crossbar		X
	Latch bar rivet will not enter hole at leg	X	
	Rivet hinge at crossbar binds		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship (cont'd)			
Leg assemblies (cont'd)	Snaphook and chain missing or are too short to secure leg in closed position	X	
	Snaphook or chain not securely fastened		X
	Rivet cracked or improperly headed		X
	Missing rivets affecting useability	X	
Fastening devices	Screws, nuts, bolts, not as specified		X
Identification marking	Omitted, incomplete, incorrect, or illegible		X

4.4.3.2 Dimensional examination. Examination shall be made of the table for compliance with dimensions specified herein and on the drawings. Any dimension not within the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

* 4.4.4 Examination of preservation-packaging. An examination shall be made to determine whether preservation-packaging, packing, and marking comply with requirements of section 5. Defects shall be as specified in table II. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units. The lot size shall be the number of shipping containers in the end item inspection lot.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T13:44Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of packaging

Examine	Defect
Markings (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Component missing, damaged, or not as specified
Workmanship	Bulged or distorted containers
Content	Contents per container is more or less than required

4.4.4.1 Inspection of shipping containers. When shipping containers are required to be in accordance with PPP-C-650, inspection for defects in anchoring, waterproofing, closure, and strapping shall be in accordance with the appendix of PPP-C-650.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each table, with legs folded and locked in place as shown in Drawing 5-11-13, shall be packaged in a snug-fitting five-panel folder conforming to style FPF, type CF, variety SW, class domestic, grade 200 of PPP-B-636, except that the fiberboard shall be B flute. Box closure shall be in accordance with method II of the appendix of PPP-B-636.

5.1.2 Level C. The table shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Four tables, individually packaged as specified in 5.1, shall be packed flat, top against top, in a crate conforming to type II, style A of PPP-C-650. Each crate shall be provided with not less than three nominal 2- by 4-inch skids attached with nails driven from inside and positioned flatwise across the bottom of the container, one flush with the inside edge and under each end crossmember and the other under the intermediate crossmember and flush with one of its edges. Nails shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

staggered, spaced not more than 3 inches apart, and clinched a minimum of 1/8 inch. Ends of the skids shall be beveled one-half the thickness at a 45 degree angle. Anchoring, waterproofing, closure, and strapping shall be in accordance with the appendix of the container specification. Strapping shall be positioned alongside the skids.

5.2.2 Level B. Four tables, individually packaged as specified in 5.1, shall be packed flat, top against top, in a crate conforming to type II, style B of PPP-C-650. Each crate shall be provided with skids as specified in 5.2.1. Anchoring, closure and strapping shall be in accordance with the appendix of the crate specification. Strapping shall be positioned alongside the skids.

5.2.3 Level C. Tables, packaged as specified in 5.2, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The table covered herein is intended for use in scaling ingredients in the mobile bakery plant and for scaling and moulding bread dough in the portable field bakery covered by MIL-B-43322.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When a first article is required (see 3.1, 4.3, and 6.3).
(c) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of the Armed Services Procurement Regulations ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one table. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the current version before use.

6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - MC

Review activity:


Army - MD

Preparing activity:

Army - GL

Project No. 7320-0434

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

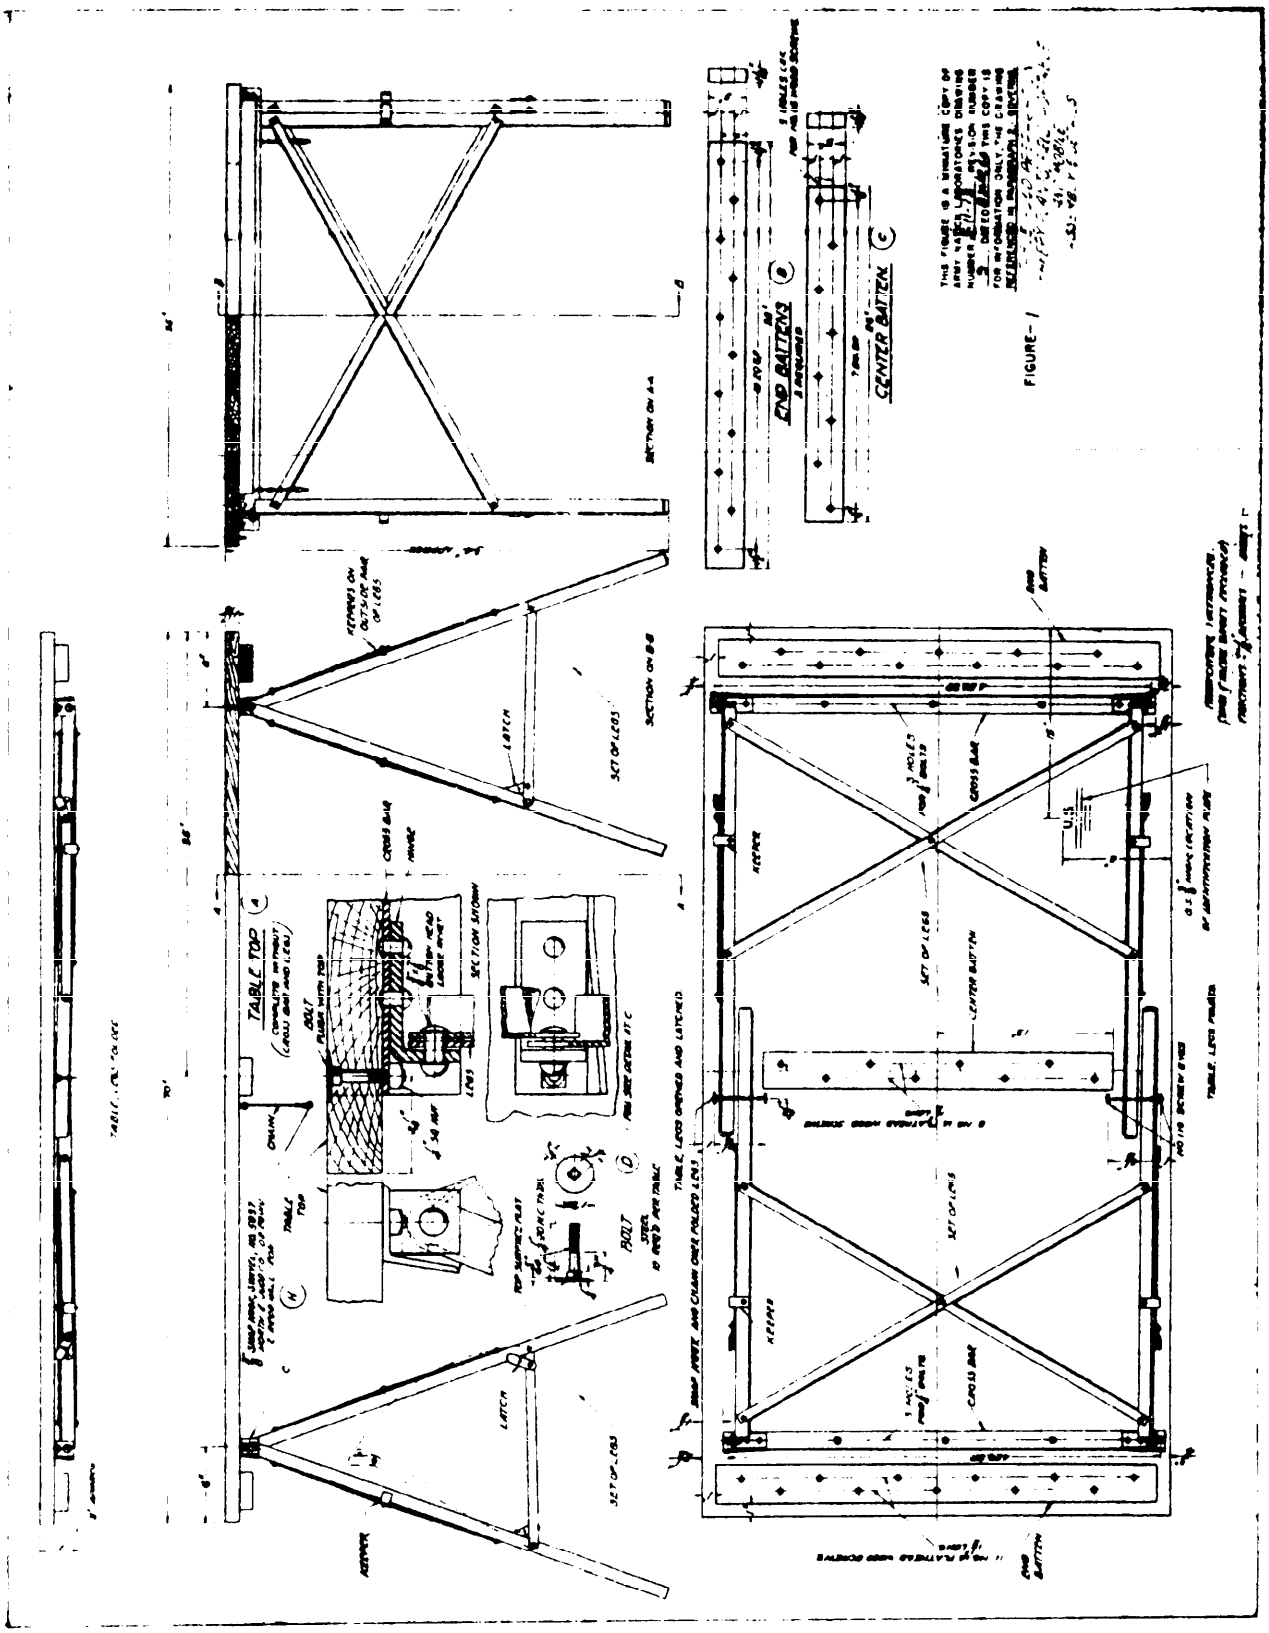

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the current version before use.

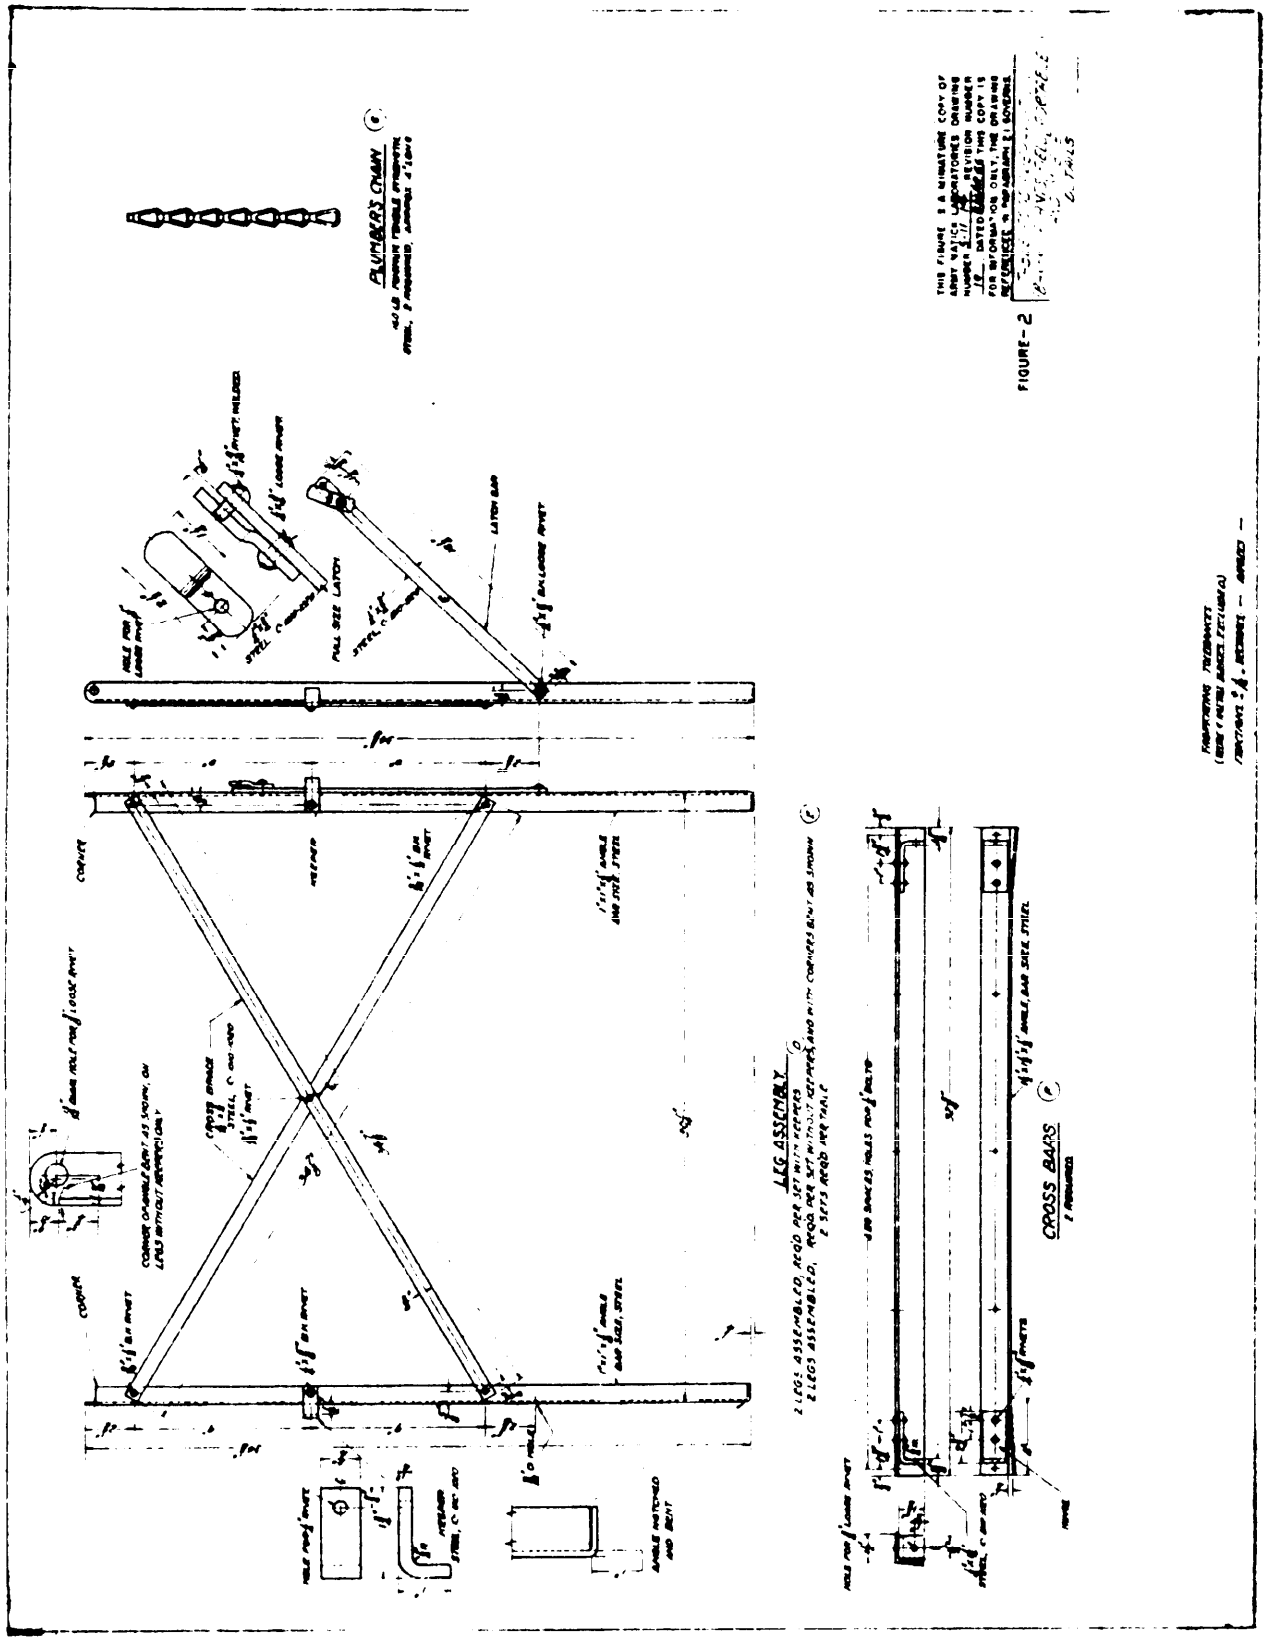


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-T-17741
Table, Food Preparation (Bakery Plants, Field, Portable and Mobile)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TD
Natick, MA 01760

NATICK OP 1 Apr 76

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:44Z
Check the source to verify that this is the current version before use.

NUMBER OF POUCHES PER INTERMEDIATE