MIL-T-1870J(GL)
19 July 1983
SUPERSEDING
MIL-T-1870H
27 January 1978

MILITARY SPECIFICATION

TROUSERS, COLD WEATHER: FIELD, WOOL, M-1951

This specification is approved for use by Natick Research and Development Laboratories, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This document covers the requirements for trousers made from wool material.

1.2 Classification. The trousers shall be of one type in the following sizes (see 6.2):

Schedule of Sizes

Short	Regular	Long
X-Small	X-Small	X-Small
Small	Small	Small
Medium	Medium	Medium
Large	Large	Large
X-Large	X-Large	X-Large

2. APPLICABLE DOCMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fasteners, Slide, Interlocking
V-L-61	-	Laces, Nylon
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
UU-P-268	-	Paper, Kraft, Wrapping
CCC-C-426	-	Cloth, Drill, Cotton
DDD-L-20	-	Label: for Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-C-823	-	Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-T-43548	-	Thread, Polyester, Cotton-Covered and Rayon Covered
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural or in Colors
MIL-C-43718	-	Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment
MIL-STD-1488	-	Provisions for Evaluating Quality of Trousers

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide samples. Guide samples of the end item, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample in which case this document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

3.2 Material (see 6.4).

3.2.1 Basic material. The basic material shall be Olive Green 108, wool serge, conforming to type I, class 1 of MIL-C-823.

3.2.2 Drill cloth. The material for pockets, waistband lining, and right fly lining shall be natural cotton drill, conforming to type I, class 2, of CCC-C-426.

* 3.2.3 Interlining. The material for interlining of left fly and the crotch lining pieces shall be unbleached polyester and cotton cloth conforming to class 1 of MIL-C-43718 except that the yarn shall contain not more than 68 percent polyester.

* 3.2.4 Labels. Each pair of trousers shall have an identification label, a size label and an instruction label conforming to type VI of DDD-L-20. The fastness to dry cleaning requirements of DDD-L-20 shall apply.

The following cable numbers of the Standard Color Card of America are furnished for information and guidance as to the intensity of the shade desired for the labels. The label color shall be medium green.
Cable No. 70034
Cable No. 70130
Cable No. 70131

3.2.4.1 Identification label. The identification label shall conform to class 1.

3.2.4.2 Size label. The size label shall conform to class 2 and shall contain the following descriptive information:

Short X-Small	Regular X-Small	Long X-Small
Waist: Below 27 in. Inseam: Up to 29-1/2 in.	Waist: Below 27 in. Inseam: From 29-1/2 to 32-1/2 in.	Waist: Below 27 in. Inseam: Over 32-1/2 in.
Stock No._____	Stock No._____	Stock No._____
NATO SIZE: 6775/5869	NATO SIZE: 7583/5869	NATO SIZE: 8390/5869
Short Small	**Regular Small**	**Long Small**
Waist: From 27 to 31 in. Inseam: Up to 29-1/2 in.	Waist: From 27 to 31 in. Inseam: 29-1/2 to 32-1/2 in.	Waist: From 27 to 31 in. Inseam: Over 32-1/2 in.
Stock No._____	Stock No._____	Stock No._____
NATO SIZE: 6775/6979	NATO SIZE: 7583/6979	NATO SIZE: 8390/6979

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

Short Medium	Regular Medium	Long Medium
Waist: From 31 to 35 in. Inseam: Up to 29-1/2 in.	Waist: From 31 to 35 in. Inseam: From 29-1/2 to 32-1/2	Waist: From 31 to 35 in. Inseam: Over 32-1/2 in.
Stock No._____	Stock No._____	Stock No._____
NATO SIZE: 6775/7999	NATO SIZE: 7583/7999	NATO SIZE: 8390/7999
Short Large	**Regular Large**	**Long Large**
Waist: From 35 to 39 in. Inseam: Up to 29-1/2 in.	Waist: From 35 to 39 in. Inseam: From 29-1/2 to 32-1/2 in.	Waist: From 35 to 39 in. Inseam: Over 32-1/2 in.
Stock No._____	Stock No._____	Stock No._____
NATO SIZE: 6775/8999	NATO SIZE: 7583/8999	NATO SIZE: 8390/8999
Short X-Large	**Regular X-Large**	**Long X-Large**
Waist: From 39 to 43 in. Inseam: Up to 29-1/2 in.	Waist: From 39 to 43 in. Inseam: From 29-1/2 to 32-1/2 in.	Waist: From 39 to 43 in. Inseam: Over 32-1/2
Stock No._____	Stock No._____	Stock No._____
NATO SIZE: 6775/9909	NATO SIZE: 7583/9909	NATO SIZE: 8390/9909

3.2.4.3 Instruction label. The instruction label shall conform to class 3 and shall contain the following information:

TROUSERS, COLD WEATHER: FIELD, WOOL, M-1951

1. Wear over winter underwear and under Trousers, Men's Field, (MIL-T-43497) for maximum warmth.
2. Attach suspender hooks to waist loops.
3. Dry clean, if possible; or wash at low temperature for short time; squeeze thoroughly and dry.
4. Warning - Clean the item with the fastener closed. Do not press the fastener.

DO NOT REMOVE THIS LABEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

3.2.4.4 Combination label. The identification label (class 1) and the instruction label (class 3) may be combined into one label. The combination label shall conform to the requirements of the class 3 label.

* 3.2.5 Thread. The thread shall be cotton covered polyester or rayon covered polyester thread conforming to MIL-T-43548, ticket numbers 30 and 50, 2 or 3 ply and 70, 2 ply for seaming and stitching; 70-2 ply for overedging; 50, 2 or 3 ply for bartacking, buttonholes and sewing on buttons. The thread shall be dyed Olive Drab S-1, C.A. 66022.

3.2.5.1 Colorfastness. The dyed thread shall show fastness to light and wet-dry-cleaning equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to light and wet-dry-cleaning.

3.2.6 Gimp. The gimp for reinforcing buttonholes shall be cotton, Olive Drab S-1, C.A. 66022, conforming to type I or II, size No. 8 of V-T-280.

3.2.6.1 Colorfastness. The dyed gimp shall show fastness to wet-dry-cleaning equal to or better than the standard sample. When no standard sample is available, the dyed gimp shall show "good" fastness to wet-dry-cleaning.

3.2.7 Suspender loops. The suspender loops shall be spun nylon, Olive Drab 7 conforming to type I, class 1 of V-L-61, except that the tips shall be eliminated.

3.2.8 Waist adjustment straps. The straps and buckle attachments shall be made of 5/8-inch wide cotton tape, Olive Drab 7, conforming to type I, class 3 of MIL-T-43566, except that only colorfastness to laundering shall apply.

3.2.9 Buttons. The buttons shall be glossy finish Olive Green BP, C.A. 62016 conforming to type II, class D, style 26, 30-line of V-B-871.

3.2.10 Buckles. The buckles for waist adjustment straps shall be tongueless, two-bar conforming to type II, style 3, class 3, size 5/8-inch of MIL-B-543.

3.2.11 Slide fastener. The slide fastener for fly closure shall conform to type I, style 1, cam lock, size LM of V-F-106, and shall have a short tab pull and a brass, or zinc chain.

3.2.11.1 Slide fastener tape. The slide fastener tape shall be dyed Shade S (Olive Drab 7), Cable No. 66519. The dyed tape shall show fastness to light and wet-dry-cleaning equal to or better than the standard sample. When no standard sample is available the tape shall show "good" fastness to light and wet-dry-cleaning.

3.3 Design. The trousers have a grown-on waistband equipped with belt loops, suspender straps, and waist adjustment straps; two side pockets, and one hip pocket on right side of back. The trousers are made with single needle construction and provide a seat seam outlet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

3.4 Patterns. Standard patterns, which provide an allowance of 3/8 inch for all seams, except seat seams where 1-1/4 inch outlets are provided, will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working pattern. The working patterns shall be identical to the standard patterns.

* 3.4.1 List of pattern parts. The trousers shall be cut from the material specified in accordance with the pattern parts indicated in table I.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Wool serge cloth	Front part	2
	Back part	2
	Hip pocket bearer	1
	Hip pocket cord	1
	Side pocket bearer	2
	Side pocket facing	2
	Fly	2
Polyester cloth Drill cotton cloth	Left fly interlining	1
	Crotch piece	2
	Right fly lining	1
	Front pocket	2
	Back pocket	1
	Waistband lining right	1
	Waistband lining left	1

3.5 Construction.

* 3.5.1 Stitches, seams and stitching. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers or open seams will result. Where two or more methods for seams or stitch types are given for the same part of an operation, any one of them may be used. Where stitch type 401, 406, 502, 503 and 504 are used, the looper thread shall be on the inside of the trousers. All seams shall start and finish evenly.

* 3.5.1.1 Type 301 stitching. Ends of all stitchings shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose bobbin or top thread, or excessive tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

* 3.5.1.1.1 Repairs of 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, runoffs, or bobbin runouts occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

* 3.5.1.2 Type 401, 502, 503 and 504 stitching. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn. All repairs shall be in accordance with 3.5.1.1.1a. and 3.5.1.1.1.b. Type 301 stitching may be used in repairing type 401 stitching.

* 3.5.1.3 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

* 3.5.2 Bartacking. Bartacking shall be 1/2 ± 1/16 inch in length and 1/8 ± 1/32 inch in width and shall contain 28 stitches. Bartacking shall be free from thread breaks and loose or tight stitching.

* 3.5.3 Buttonholes. The buttonholes shall be the eyelet end taper bar type, worked over gimp (see 3.2.6) with not less than 4 stitches at bar end (not counting the cross over stitch). The buttonholes shall finish with the purling on the outside of the trousers. The finished cut lengths shall be 3/4 to 7/8 inch. The buttonholes shall be clean cut with the stitching securely caught in the fabric. Additive treatments or materials used to secure the ends of the stitching or to stiffen the fabric, prior to stitching the buttonholes are prohibited.

3.6 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operations specified in table II. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished trousers.

3.6.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written document and the figure, the document shall control.

3.6.2 Pressing. All pressing specified in table II shall be done with a heated pressing iron or machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut trousers in strict accordance with patterns furnished, which show directional lines, size and placement of pockets and notches for the proper assembling of all parts. Directional lines indicate the warp direction. b. Cut all parts of the trousers out of one piece of material, except hip pocket cords, side pocket facings, belt loops, and right and left flies, which may be cut from ends. Stripping for belt loops shall be cut of sufficient width to finish 1/4 to 3/8 inch wide (see operation 16). Parts cut from ends shall approximate the shade of the trousers. c. Lay the fronts and backs so that the crease line does not vary from the straight of the material by more than 2-1/2 inches on either fronts or backs. d. Cut the tape for the waist adjustment straps 7-1/4 ± 1/4 inches long. e. Cut the tape for the buckle attachment straps 2-3/4 ± 1/4 inches long. f. Cut the nylon lacing for the suspender loops 7-1/2 ± 1/4 inch in length for all sizes.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Cut linings and pocketing. a. Cut the cotton drill cloth for waistband lining and as many pockets as possible on the straight to finish with the face of material on the outside. The waistband lining may be cut in strips and rolled for machine application. b. Cut the cotton drill cloth for right fly lining on the bias to finish with the face of the material on the outside. * c. Cut the interlining cloth for left fly lining in the direction of the warp. Cut the crotch lining piece so that one of the inseam sides is in the direction of the warp.						
3.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages are classified as defects in MIL-STD-1488 shall be removed from production and replaced by non-defective and properly matched components.						
4.	Marking. a. Mark, ticket or bundle all component parts of the trousers except those parts cut from ends to insure correct size and uniform shade throughout the trousers.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Marking. (cont'd)						
	b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sew-on tickets. (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.						
5.	Overedge stitching.						
	Finished appearance. Where a knife is used on the serging machine, care shall be exercised to insure that the gage is properly set so that the edge of the fabric is not cut off, but only the frayed edge is trimmed.						
	a. Overedge the seam allowance of inseam, (the overedging may be continued across the leg bottom) outseam, crotch seam and right front edge of foreparts. The crotch linings, folded in half lengthwise, shall be caught in the overedge stitching.	502 or	EFd-1	6-10	70	70	
		503 or	EFd-1	6-10	70	70	
		504 and	EFd-1	6-10	70	70	
		502 or	SSa-1	6-10	70	70	
		503 or	SSa-1	6-10	70	70	
		504	SSa-1	6-10	70	70	
	or						
	b. The folded crotch linings may be stitched to the foreparts in a separate operation.	301	SSa-1	12-16	50	50	
	c. Overedge the seam allowance of inseam (the overedging may be continued across leg bottom), outseam of back parts.	502 or	EFd-1	6-10	70	70	
		503 or 504	EFd-1	6-10	70	70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Labeling.						
	a. Position the labels as follows and seam on all four sides of label (except size label) not more than 3/8 inch from edges.	301	LSbj-1	8-12	50	50	
	(1) Stitch the identification or combination label on all four sides to bottom outer portion of right hip pocket (off center tolerance of 1/2 inch is allowed).						
	(2) Stitch the instruction label (if combination label is not used) on all four sides, above the identification label. Top edge of identification label may be caught in bottom edge stitching of instruction label.						
	(3) Position the size label on the right hip pocket at lower row of waist band stitching, free of belt loop bartack (see operation 18).						
7.	Make side pockets.						
	a. Turn in the edge of bearer and facing respectively and seam to pocket continuing the stitching across the bottom edge. The bottom edge of facing need not be turned under.	301 and 301	LSd-1 LSbj-1	12-16 12-16	50 50	50 50	
	or						
	b. Overedge stitch the edge of bearer and facing respectively and seam to pocket adjacent to overedge stitching.	502 or 503 or 504 and 301	EFd-1 EFd-1 EFd-1 LSbj-1	6-10 6-10 6-10 12-16	50 50 50 50	50 50 50 50	

NATICK Form 903

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make side pockets. (cont'd)						
	c. When edges of facing are selvage, they need not be turned in or overedged.						
	d. Stitch around bottom of hanging pocket, from front edge to within 1 ± 1/8 inches of notch at bottom opening.	301 or	SSe-2(a)	12-16	50	50	
		401	SSe-2(a)	12-16	50	70	
8.	Stitch on side pockets.						
	Finished appearance. The edges of the pocket openings shall finish smooth and flat without distortion. Pocket openings shall be of uniform appearance. The bottom front corners of the hanging pockets shall be backstitched, and care shall be taken to avoid notching the pocket on the underside beyond the width of the side seam outlet. Pocket opening shall finish 5-3/4 ± 1/4 inches long. Exposed part of pocket bearers shall not vary more than 1/4 inch.						
	a. Seam side pockets to fronts, notch at bottom end of pocket stitching, turn and double stitch edge 3/16 to 1/4 inch gage, with front row of stitching 1/16 to 1/8 inch from turned edge.	301 or	SSe-2(a)	12-16	50	50	
		401 and	SSe-3(a)	12-16	50	70	
		301	SSe-3(b)	12-16	50	50	
	or						
	b. Seam pockets to fronts, turn and single stitch 3/16 to 1/4 inch from edge, extending stitching to top edge of front and to side seam below opening.	301 or	SSe-2(a)	12-16	50	50	
		401 and	SSe-2(a)	12-16	50	70	
		301	SSe-2(b)	12-16	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Stitch on side pockets. (cont'd)						
	c. Stitch trouser to bearer above and below the pocket opening 1/16 to 1/8 inch from edge. When double needle construction is used in operation a. above, the stitching shall be aligned with the front row of edge stitching to trouser front. The portion above the pocket opening shall be stitched through bearer and drill pocketing.	301	SSa-1	12-16	50	50	
	d. The right and left pocket openings shall not vary by more than 1/4 inch in length of opening.						
9.	Make left fly.						
	a. Overedge together the back edges of left fly and interlining.	502 or 503 or 504	SSa-1 SSa-1 SSa-1	6-10 6-10 6-10	70 70 70	70 70 70	
	b. Position left side of fastener on left fly so that edge of chain will be 5/8 to 3/4 inch from front edge of finished fly at top to 3/8 to 1/2 inch from front edge of finished fly at bottom, with the bottom end of the chain 1/4 to 1/2 inch above fly notch. The top of fastener shall be inserted in the slit at the top of the fly.						
	c. A continuous type slide fastener chain may be used with the slide fastener tape extending the full length of both flies. Remove scoops at the base of fly, exposing 5/8 to 3/4 inch of tape for finishing fly base.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make left fly. (cont'd)						
	d. Seam fastener tape to fly through interlining from notch at bottom to slit at top of fly with two rows of stitching; the first row shall be 1/8 to 3/16 inch back of the chain, the second row 1/16 to 1/8 inch from back edge of tape.	301 or	SSau-2	12-16	50	50	
		401	SSau-2	12-16	50	70	
	e. Turn top of fly back on itself at slit, and seam across width of fly 1/4 to 3/8 inch from edge catching the slide fastener tape in the seaming. Turn top of fly up and raise stitch 1/16 to 1/8 inch from seam.	301	LSq-2	12-16	50	50	
10.	Make right fly.						
	a. Seam the lining to the front edge of the fly turn and stitch 1/16 to 1/8 inch from edge.	301 or	SSe-2(a)	12-16	50	50	
		401 and	SSe-2(a)	12-16	50	70	
		301	SSe-2(b)	12-16	50	50	
	b. Position the right half of slide fastener on the back edge of right fly with the bottom end of chain 1/4 to 1/2 inch above fly notch. The top edge of tape shall extend to the full length of the fly and be inserted in the slit at top of fly.						
	c. Stitch the back edges of fly and slide fastener tape together.	301	SSa-1	12-16	50	50	
	d. Turn top of fly back on itself at slit, and seam across width of fly 1/4 to 3/8 inch from edge, catching the slide fastener tape in the seaming. Turn top of fly up and raise stitch 1/16 to 1/8 inch from seam.	301	LSq-2	12-16	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Sew on right and left flies.						
	Finished appearance. The flies shall be of even length where they join the crotch seam. The fly shall lay flat without twists or puckers when fastener is closed.						
	a. Position the left fly, notch to notch, and sew from notch to top of waistband continuing the stitching across top of fly. Trim corner and turn.	301	SSa-1	12-16	50	50	
	b. Turn left fly to the inside with the seam 1/16 to 1/8 inch back of folded edge, and press front edge without damage to slide fastener chain.						
	c. Sew on right fly, notch to notch, catching slide fastener tape in the seam. When the back edge of right fly is not overedge stitched, the joining seam of fly shall be pressed open and flat with the fastener tape facing toward the side seam. The slide fastener chain shall not be damaged in the pressing.	301 or 401	LSq-2(a) LSq-2(a)	12-16 12-16	50 50	50 70	
	d. Turn under the back edge of the fly lining and raise stitch front of trousers through fly, and folded edge of fly lining from top of waistband to base of fly 1/16 to 1/8 inch from edge. The point of the fly lining shall extend not less than 1/2 inch beyond the inseam.	301	LSq-2(b)	12-16	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make hip pocket.						
	Finished appearance. Ends of openings where the cordings are turned shall be neatly finished without raw edges or pleats. The top of the pocket shall extend into the waistband and shall be caught in the bottom stitching of the waistband lining. The pockets shall be in alignment, uniform in width and depth and shall finish 5-3/4 to 6-1/4 inches deep. The pocket openings shall finish 5-1/4 ± 1/8 inch long.						
	a. Turn in lower raw edge of pocket bearer and seam to pocket at marks as indicated on patterns. When bearer is cut on the selvage, the edge need not be turned in.	301	LSd-1	12-16	50	50	
	b. Position cord facing piece as indicated by patterns and seam to trousers through pocket on the under side with two rows of stitching.	301	SSv-2	12-16	50	50	
	c. Cut pocket opening, turn cord facing piece through cut opening and raise stitch, forming a 1/16 to 3/16 inch cord on lower edge of opening.	301	SSe-2 shows finished seam	12-16	50	50	
	d. Turn in raw edge of cord facing piece and seam to pocket. When cord facing is cut on selvage, the edge need not be turned in.	301	LSd-1	12-16	50	50	
	e. Fold back pocket and seam side raw edges and turn.	301 or 401	SSe-2(a) SSe-2(a)	12-16 12-16	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make hip pocket. (cont'd)						
	f. Smooth out pocket and stitch 3/16 to 1/4 inch around sides and bottom edges. The ends of facing pieces shall be caught in the edge stitching only.	301	SSe-2(b) and	12-16	50	50	
		301	OSf-1	12-16	50	50	
	g. Turn in the upper edge of pocket forming a 1/16 to 3/16 inch cord and stitch through cord facing piece, facing, and pocket; closing top of pocket.	301		12-16	50	50	
	h. Tack ends of pocket through cords, bearer and pocket.	301		12-16	50	50	
	Piping construction.						
	i. Operations b. and c. may be accomplished with a double piped pocket machine, which stitches and cuts the piped edges in one operation. The joining seam of the bottom piping piece shall be raised stitched through back and piping piece and the joining seam of the top piping piece shall be raised stitched through all plies in the closing of the top pocket. Ends of pocket opening shall be tacked.	101 and	SSv-2	12-16	50		
		301		12-16	50	50	
	or						
	Welt construction.						
	j. Turn in raw edge of pocket facing (or bearer) piece and seam to pocket at notches as indicated on patterns. When facing is cut on selvage the edge need not be turned in.	301	LSd-1	12-16	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	Welt construction. (cont'd)						
	k. Seam welt piece to trousers catching pocket on the underside.	301	SSv-2	12-16	50	50	
	l. Cut opening, tongue notch corners, turn welt piece through cut opening and stitch, forming a 1/4 inch welt on the lower edge of opening.	301		12-16	50	50	
	m. Turn in raw edge of welt piece and seam to pocket. When lower edge of welt facing piece is cut on the selvage, the edge need not be turned in.	301	LSd-1	12-16	50	50	
	n. Fold and smooth out pocket, then close by stitching the side edges. Turn pocket and edge stitch 3/16 to 1/4 inch from all edges. The ends of the facing piece shall be caught in the edge stitching only.	301 or	SSe-2(a)	12-16	50	50	
		401 and	SSe-2(a)	12-16	50	70	
		301	SSe-2(b) and	12-16	50	50	
		301	OSf-1	12-16	50	50	
	o. Stitch along top edge of opening 1/16 to 1/8 inch from edge, through back, folded under welt piece and pocket, closing top of pocket and tack ends of pocket.	301	SSe-2(b)	12-16	50	50	
	p. Upper portion of pocket shall extend into waistband, and be caught in the lower stitching of the waistband lining.						
13.	Join outseams.						
	Finished appearance. The outseams shall be joined with notches matching, without twists or puckers. The seams shall start and finish evenly.						
	a. Single stitch the outseams.	301 or	SSa-1	12-16	30	30	
		401	SSa-1	12-16	30	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Press outseams.						
	a. Press outseams open and flat from top of waistband to bottom of leg.						
15.	Side pockets.						
	a. Stitch around pockets 1/4 to 3/8 inch from edge. The outseam allowance of the backs shall be caught in stitching of pocket, with the raw edge of pocket turned in. End of stitching at the corner of pocket shall be backstitched.	301 or	SSe-2(b)	12-16	50	50	
		301	SSb-1	12-16	50	50	
16.	Make belt loops.						
	Finished appearance. Belt loops on finished trouser shall measure 1/4 to 3/8 inch wide and 2 ± 1/4 inches long between bartacks.						
	a. Fold stripping lengthwise, to the center, with the edges abutted and stitch with the cover stitch on the underside.	406	EFh-1	12-16	50	50	
	or						
	b. Fold stripping with both edges turned in and with turned-in edges abutted, stitch 3/16 inch gage with the cover stitch on the underside.	105	EFae-1	12-16	50		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Seam on waistband lining and set belt loops.						
	Finished appearance. The waistband lining shall be attached smoothly. Belt loops shall be inserted with ends caught in top row of stitching. Tops of pockets shall be smoothed out and caught in lower row of stitching. The lining shall not be exposed beyond the top of the trousers.						
	a. Position six belt loops as follows (± 1/2 inch tolerance permitted on front and back loops and + 0 - 1/2 inch tolerance permitted on side loops).						
	One on each front, 4 inches in front of side seam. (For size X-Small each loop shall be 2-1/2 inches in front of pocket seam).						
	One on each back, 1/2 inch from side seam.						
	One on each back, 4 inches from seat seam.						
	b. Turn in the upper and lower edges of the waistband lining and seam to the top of trousers with a row of stitching 1/16 to 1/8 inch from edge of the turned lining, inserting the belt loops and pockets in their proper position between the trousers and waistband lining. The rows of stitching shall finish 1-1/2 ± 1/8 inches apart and the finished waistband lining shall measure 1-3/4 ± 1/8 inches wide.	301 or	LSk-2	12-16	50	50	
	or	401	LSk-2	12-16	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Seam on waistband lining and set belt loops. (cont'd)						
	c. Stitch waistband lining to the top of the waistband at right and left sides of trousers, with the tops of the belt loops inserted in proper position. The tops of the pockets shall finish smooth and flat.	301 or	BSm-3(a)	12-16	50	50	
		401	BSm-3(a)	12-16	50	70	
	d. Turn down waistband and raise stitch 1/16 to 1/8 inch from waistband joining seam, through waistband, catching the waistband lining and tops of belt loops.	301	BSm-3(b)	12-16	50	50	
	e. Turn under the bottom edge of waistband lining and stitch through waistband lining and trouser, catching the tops of pockets, properly positioned and smoothed out.	301 or	BSm-3(c)	12-16	50	50	
		401	BSm-3(c)	12-16	50	70	
	f. The waistband lining shall extend to front edge of right fly and finish under the left fly.						
18.	Sew on size label.						
	a. Position size label on right hip pocket, free of belt loop bartack (operation 20) and stitch across top of label, with stitching superimposed on lower row of waistband stitching. or Label may be caught in the waistband setting, positioned as above.	301	LSbj-1	12-16	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Finish ends of right fly and top of left fly.						
	Finished appearance. The top corner of the left fly shall be completely forced out, and present a smooth appearance. The right fly lining shall finish smooth and flat without pleats. Care shall be exercised in the finish of the top left fly to avoid bulkiness. The finished seaming of the left fly shall be uniform in width with the fly, smooth and flat without gathers or pleats. The joining seam of the left fly to foreparts shall not be exposed on the outside of the trousers. The base of the fly shall be finished without twists, puckers, or pleats. The crotch and seat seam shall be spread, when the right fly lining is stitched.						
	a. Turn in the end of waistband lining and stitch to edge of right fly.	301	SSc-1	12-16	50	50	
	b. Seam back edge of left fly through front, from notch to the top of trousers, 1-1/2 to 1-3/4 inches wide with the waistband lining under left fly.	301	SSa-1	12-16	50	50	
	c. Continue the top waistband lining stitching to the front edge of left fly.	301	SSa-1 and SSe-2(b)	12-16	50	50	
	d. Continue the bottom waistband stitching to the left fly stitching.	301	LSd-1	12-16	50	50	
20.	Attach suspender loops.						
	a. Position suspender loops as follows: Both ends of each suspender loop at 45 ± 10 degrees angle forming an arc below inside top turned down hem of grown on waistband of the left and right front of						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Attach suspender loops. (cont'd)						
	the trouser. One end of each loop shall be 1/4 to 1/2 inch forward of each side seam with the opposite end of the loops extending 5 to 5-1/2 inches and 4 to 4-1/2 inches for X-Small size in regular, long and short towards the front of the trousers, thus forming the top of the arc of the loop which shall be 3/8 to 5/8 inch below top of finished trousers.						
*	b. Turn under the ends of each loop 3/8 to 1/2 inch and vertically bartack across the ends of each loop with double 1/2 inch bartacks spaced 1/8 to 1/4 inch apart.	Bartack		28 per bartack	50	50	
21.	Stitch inseam						
	Join inseams with the notches matching as indicated by marks on patterns.	301	SSa-1	12-16	30	30	
22.	Press inseams.						
	Press inseams open and flat with a heated pressing iron.						
23.	Join crotch and seat seam.						
	a. Overedge seat seam allowances, with waistband caught in overedge stitching.	502 or 504 and 502 or 504	EFd-1 EFd-1 SSa-1 SSa-1	6-10 6-10 6-10 6-10	70 70 70 70	70 70 70 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Join crotch and seat seam. (cont'd)						
	b. Join crotch and seat from base of fly to the top of waistband at back with a double needle seat seamer with the top two rows of stitching 1/32 inch apart, forming outlets as indicated by marks on pattern. Inseams shall not be staggered by more than 1/4 inch at crotch.	401	SSa-2	8-12 each needle	30	50	
	c. With seams spread open, stitch the extension of the right fly lining of each side of crotch and seat seam, 1/8 inch from edges, to a point not less than 1/2 inch beyond the inseam, with the bottom of the raw edge turned under, with the stitching tacked.	301 or 401	SSac-3 SSac-3	12-16 12-16	30 or 50 or 30	30 or 50 or 50	
	d. Measure waist to verify size.						
	e. Stitch outlet at waist across the top, tacking outlet to waistband. Seam outlet shall measure at least 2 inches across top.	301 or 401	SSa-1 SSa-1	12-16 12-16	50 50	50 70	
24.	Assemble slide fasteners.						
	Finished appearance. The right and left parts shall be so assembled that the ends of the respective chains are even and the fastener shall function smoothly.						
	a. Attach slider and staple bottom of respective chains together.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
25.	Press seat seam.						
	a. Press seat seam open and flat, with a heated pressing iron, from fly tack to top of waistband at top of back.						
26.	Bottoms.						
	a. Turn bottoms of trousers as indicated by marks on patterns and blind stitch the raw edge of the turnup to legs.	103	EFd-1	6-8	50		
27.	Bartacking (machine).						
*	a. Bartack all pockets at each end of pocket openings with 1/2 inch bartack.	Bartack		28 per bartack	50	50	
*	b. Bartack belt loops with 1/2 inch bartack at upper and lower edges with lower ends turned. The distance between bartacks shall be 2 ± 1/4 inches Bartacks shall extend the width of the loops. (See operation 17 for position of loops).	Bartack		28 per bartack	50	50	
*	c. Bartack the fly in line with the left fly stitching at the junction of the crotch seam and fly with 1/2 inch bartack. Bartack may be diagonal or horizontal.						
28.	Make waistband buttonhole.						
	a. Make buttonhole in top of left fly in the center of waistband, (tolerance 1/4 inch from center) between the double row of stitching, with the inside edge of eyelet 1/2 ± 1/8 inch from edge of left fly.	Buttonhole		42-52 per buttonhole including tack	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
28.	Make buttonhole. (cont'd)						
	b. Make buttonhole in center of right hip pocket with the inside edge of eyelet 1/4 to 3/8 inch from joining seam of cord. A tolerance of 1/8 inch is allowed from center.	Buttonhole		42-52 per buttonhole tack	50	50	
29.	Make and attach two waist adjustment buckle straps.						
	Finished appearance. Each waist adjustment strap shall consist of a buckle loop strap and an adjustment strap of 5/8 inch webbing, each positioned 1/2 to 3/4 inch below top edge of waistband. The buckle loop shall be positioned with the folded end 1/4 to 3/4 inch in front of each side seam; the adjustment strap shall be positioned so that the free end can extend the full length toward back of trousers.						
	a. Loop webbing over bar of buckle; turn under raw end and seam to trouser with a double row of stitching, catching the under fold of loop.	301	LSd-2	12-16	50	50	
	b. Hem free end of adjustment strap with raw edge turned under and box stitch 1/16 to 1/8 inch from edge. The hem shall measure 1-1/4 ± 1/4 inch.	301	EFb-1	12-16	50	50	
	or						
	c. Thread unfinished end of strap over the first bar at lip end of buckle; turn under the end of strap 1/4 to 3/8 inch, extend full length towards back and stitch to trouser with two rows of stitching across end of strap with first row 1/16 to 1/8 inch from end of strap and second row 1/4 to 3/8 inch from end of strap.	301	LSd-2	12-16	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Make and attach two waist adjustment buckle straps. (cont'd)						
	d. Bartack the strap to the trouser with two 1/2 inch bartacks spaced 1/4 to 3/8 inch apart across end of strap.	Bartack	LSd-2	28 per bartack	50	50	
30.	Gage and sew on buttons.						
	Finished appearance. All buttons shall be so positioned as to secure a smooth and complete closure without bulging.						
	a. Sew a button on outside of waistband at top of right fly in line with buttonhole at top of left fly.	301 or		14-16 per button	50	50	
		101		14-16 per button	50		
	b. Sew a button on right hip pocket through pocket and facing to correspond with buttonhole in hip pocket.	301 or		14-16 per button	50	50	
		101		14-16 per button	50		
31.	Cleaning.						
	a. Trim all ends of stitching and remove loose threads from trousers.						
	b. Remove all shade tickets. Remove all spots and stains.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
32.	Pressing. a. Press the tops, including fly and pocket smooth. Crease the legs in the center with the seams matching at the bottom and in the crotch; the inseam in the crotch may be slightly back of the outseam. The end of the crease shall not extend beyond nor end more than one inch below the junction of inseam and crotch seam. b. Close slide fastener. c. Close top waistband button.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

* 3.7 Finished measurements. Finished measurements shall conform to table III.

TABLE III. Finished measurements inches

Size	1/2 Knee 1/	1/2 Bottom 2/	1/2 Waist 3/	Inseam 4/	Outseam 5/
Short, X-Small	10-1/4	9	14-1/8	28	39
Regular, X-Small	10-1/4	9	14-1/8	31	42-5/8
Long, X-Small	10-1/4	9	14-1/8	34	46-1/4
Short, Small	10-3/4	9-1/4	16-1/8	28	39-1/2
Regular, Small	10-3/4	9-1/4	16-1/8	31	43-1/8
Long, Small	10-3/4	9-1/4	16-1/8	34	46-3/4
Short, Medium	11-1/4	9-1/2	18-1/8	28	40
Regular, Medium	11-1/4	9-1/2	18-1/8	31	43-5/8
Long, Medium	11-1/4	9-1/2	18-1/8	34	47-1/4
Short, Large	11-3/4	9-3/4	20-1/8	28	40-1/2
Regular, Large	11-3/4	9-3/4	20-1/8	31	44-1/8
Long, Large	11-3/4	9-3/4	20-1/8	34	47-3/4
Short, X-Large	12-1/4	10	22-1/8	28	41
Regular, X-Large	12-1/4	10	22-1/8	31	44-5/8
Long, X-Large	12-1/4	10	22-1/8	34	48-1/4
Tolerance - plus	1/4	1/4	1/2	3/4	3/4
minus	1/4	1/4	1/4	1/2	1/2

1/ Knee - Measure leg across front, from fold to fold, at following positions measured from hem up:

Short - 15-3/4 inches up
Regular - 17-5/8 inches up
Long - 19-1/2 inches up

2/ Bottom - Measure leg across front from fold to fold to bottom of hem.

3/ Waist - With trousers buttoned and flat, measure from side fold to side fold at top of waist.

4/ Inseam - Measure from crotch seam to bottom of hem.

5/ Outseam - Measure from top of waist to bottom of hem along outseam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

* 3.8 Workmanship. The finished trousers shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Quality conformance inspection.

* 4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.2 Point count inspection. Sampling and inspection provisions for end item examination of utility "U" trousers, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1488.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each pair of trousers, with inseams meeting, shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23 inches. For larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches. Five pairs of folded trousers of one size only shall be neatly stacked in a bundle with the waistbands alternated and securely tied with cotton tape or twine approximately 4 inches in from each end.

* 5.1.2 Commercial. Trousers shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Twenty-five pairs of trousers of one size only, preserved as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container, conforming to style RSC-L, grade V2s, of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat five in depth. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Not less than four ounces of napthalene

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

flakes shall be uniformly distributed throughout the contents of each shipping container, except where trousers are made of cloth pre-treated with a moth repellent. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B packing. Twenty-five pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275, of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed flat five in depth. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Not less than four ounces of napthalene flakes shall be uniformly distributed throughout the contents of each shipping container, except where trousers are made of cloth pretreated with a moth repellent. Level A bundles shall be packed flat, five in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.

* 5.2.3 Commercial packing. Trousers, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

* 5.3 Marking. In addition to any special marking required by the contract or purchase order shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side directly under the printing or stenciling a white paper label 5 by 4 inches, with the words MIXED NSNs plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and NSNs contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

6. NOTES

* 6.1 Intended use. The trousers are intended for wear by military personnel as a component of the cold-wet uniform ensemble.

* 6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this document.
b. Size required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B (see 5.2.2.1).

6.3 Samples. For access to the end item shade samples and standard samples, address the procuring activity issuing the invitation for bids.

* 6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

* 6.5 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

Project No. 8415-A334

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

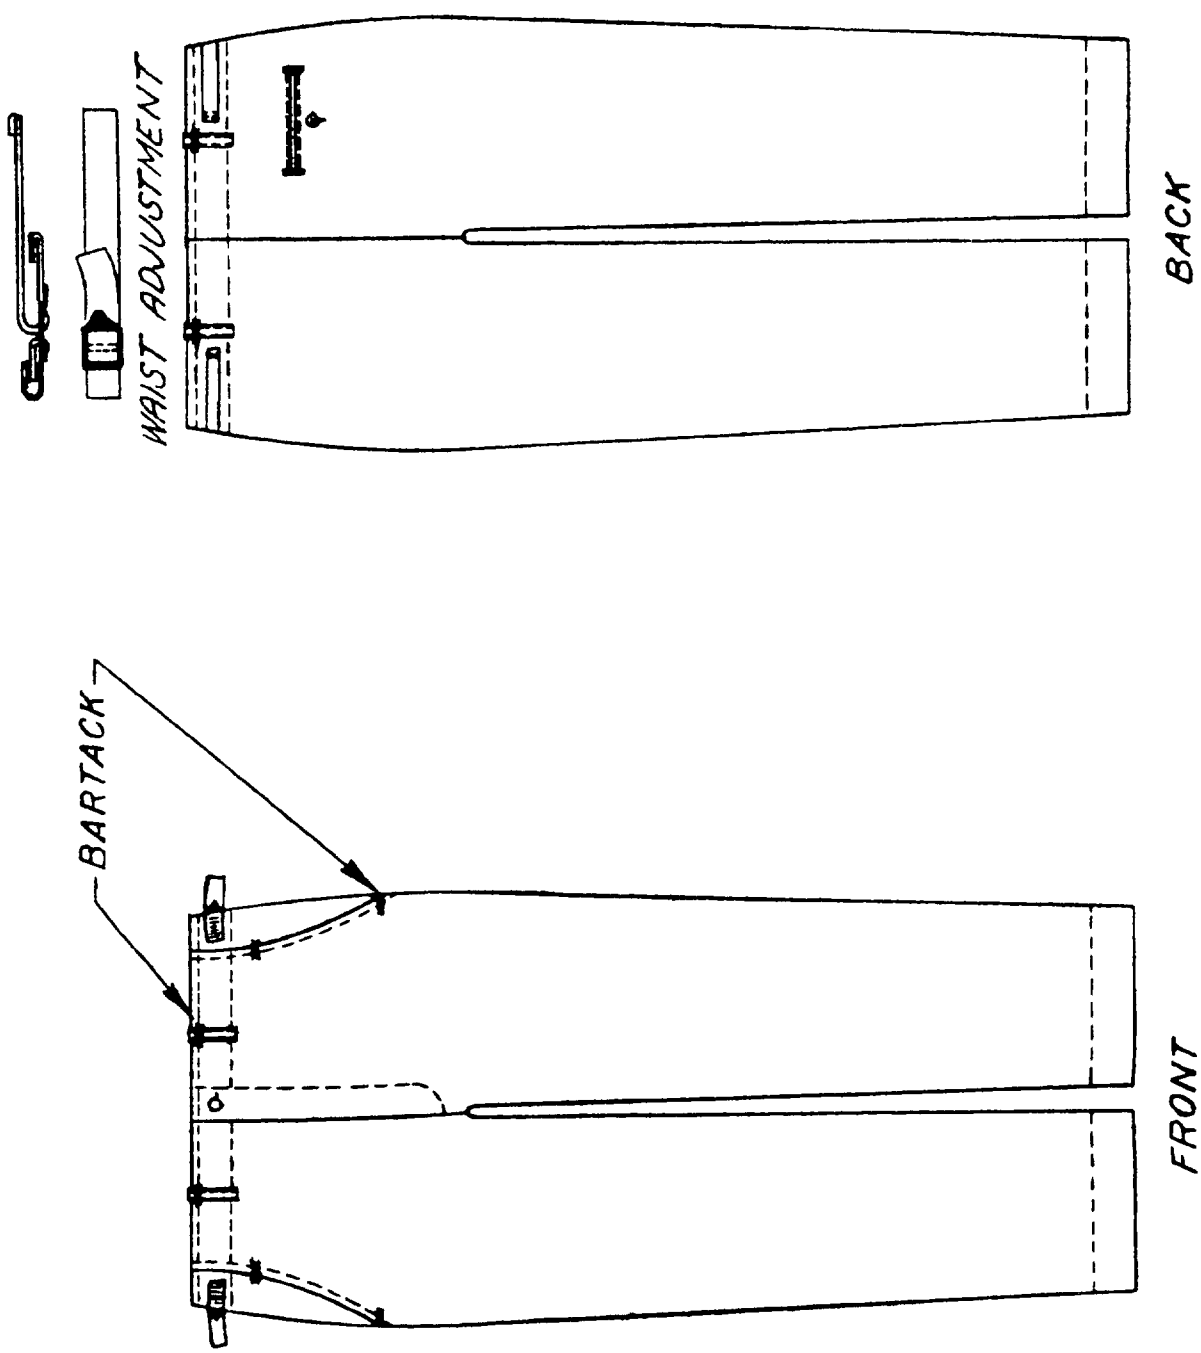


FIG-1-TROUSERS, COLD WEATHER, MEN'S, FIELD, WOOL, M-1951

2-1-464C

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Laboratories
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRDNA-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Laboratories
ATTN: DRDNA-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-1870J(GL)	Trousers, Cold Weather: Field, Wool, M-1951

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP 1 APR 83

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:48Z
Check the source to verify that this is the current version before use.