MIL-C-39024/6C
20 December 1971
SUPERSEDING
MIL-C-39024/6B
3 August 1970

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE: 4, 6, AND 8 TEST POINT, 0.156 INCH CONTACT SPACING

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-39024.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.


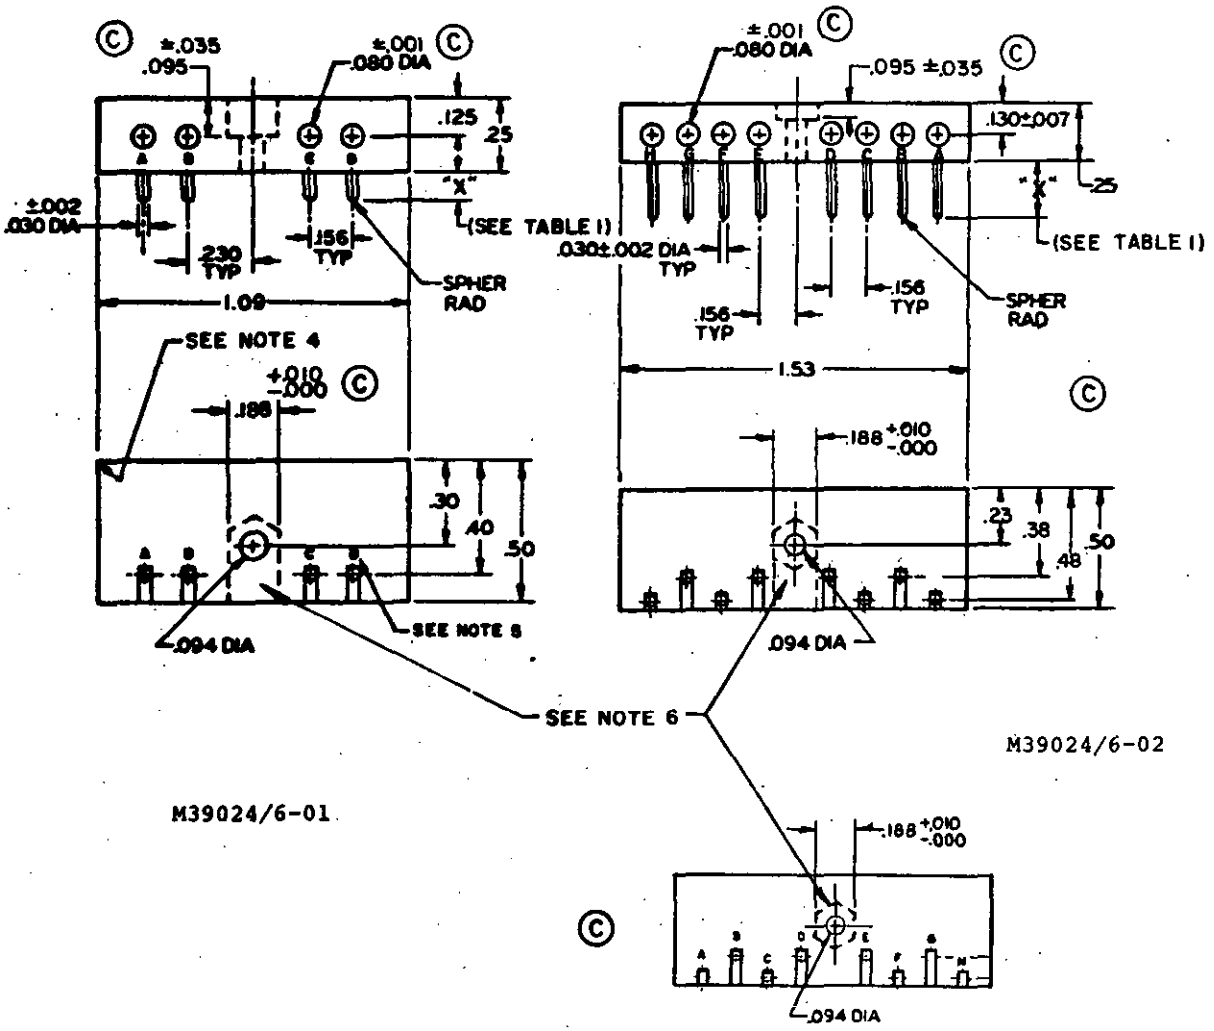


Figure 1. Configuration and dimensions

© Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

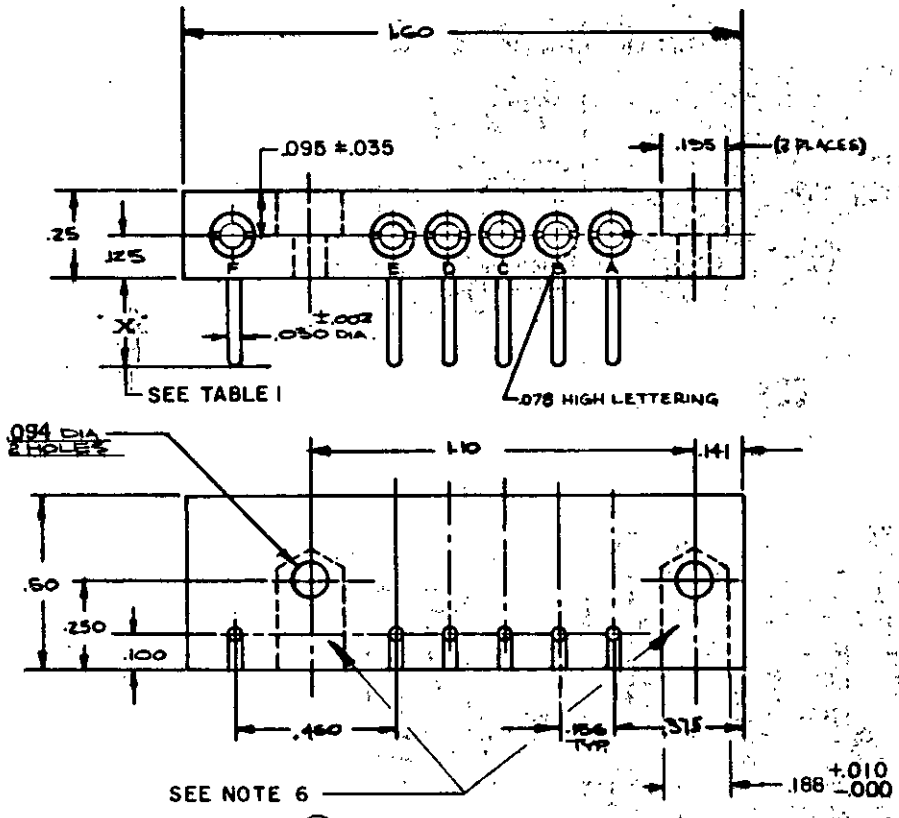

© M39024/6-03 & -04

INCHES	MM	INCHES	MM
.001	.03	.188	4.78
.002	.05	.195	4.95
.007	.18	.230	5.84
.010	.25	.25	6.35
.030	.76	.281	7.14
.035	.89	.30	7.62
.050	1.27	.375	9.53
.080	2.03	.38	9.65
.094	2.39	.40	10.16
.095	2.41	.460	11.68
.100	2.54	.48	12.19
.110	2.79	.50	12.70
.125	3.18	1.09	27.69
.130	3.30	1.10	27.94
.141	3.58	1.53	38.86
.150	3.81	1.60	40.64
.156	3.96		

NOTES:
1. Dimensions are in inches.
2. © Unless otherwise specified, tolerances are ±.02(.51 mm) for two place decimals and ±.010(.25 mm) for three place decimals.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Radius on corners is optional.
5. Letters shall be used to identify test points.
6. Hexagonal mounting hole optional.

Figure 1. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Number of contacts	Dimension (in inches 1/)
		X ± .01 (.25)
-01	4	0.09 (2.29)
-02	8	0.25 (6.35)
-03	6	0.25 (6.35)
-04	6	0.50 (12.70)

1/ Metric equivalents are shown in parentheses.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure and table I.
Test probe: 0.080 ±0.001 inch in diameter and 1/2-inch (min) length.
Contact material: Phosphor bronze per QQ-B-750 or copper-beryllium per QQ-C-530.

Dielectric withstanding voltage (at sea level):
Test voltage: 4,000 volts rms, 60 hertz.

Identification marking:
Part number: M39024/6-(dash number from table I).
Date code: Shall be in accordance with MIL-STD-1285.

OPERATING NOTES:

1. Operating voltage is 1,500 volts rms, 60 hertz at sea level.

2. Maximum thickness of printed wiring board on which these connectors may be used is as follows:

Dash number	Max. thickness
-01	0.031
-02 and -03	0.188
-04	0.438

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, ME, SL
Navy -
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - MI, MU, WC
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19, 14

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5935-1751)

*U.S. GOVERNMENT PRINTING OFFICE: 1972-714-162/4511

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.