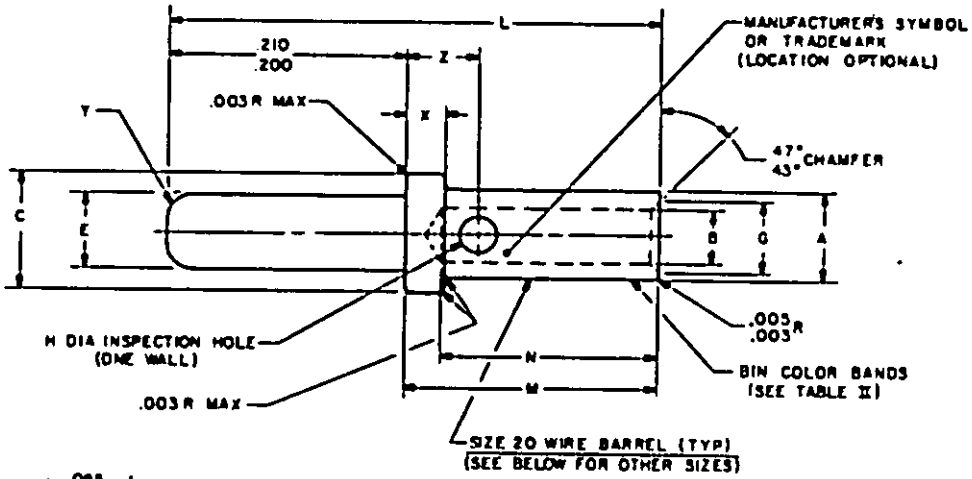
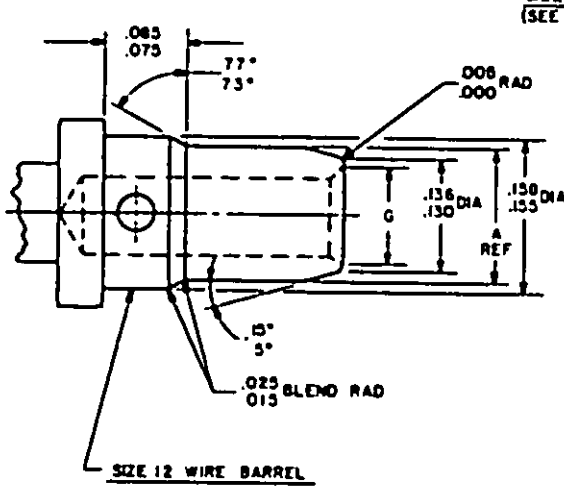
MILITARY SPECIFICATION SHEET

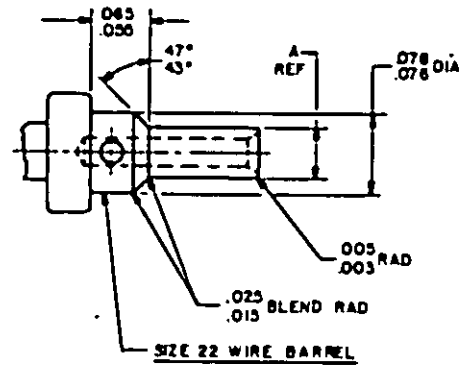
# CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, (FOR MIL-T-81714 TERMINAL JUNCTION SYSTEM)

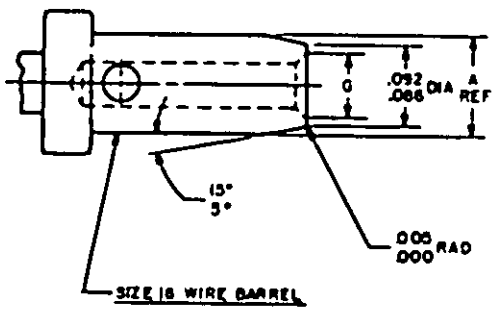
This specification is approved for use by all Departments and Agencies of the Department of Defense. (F)

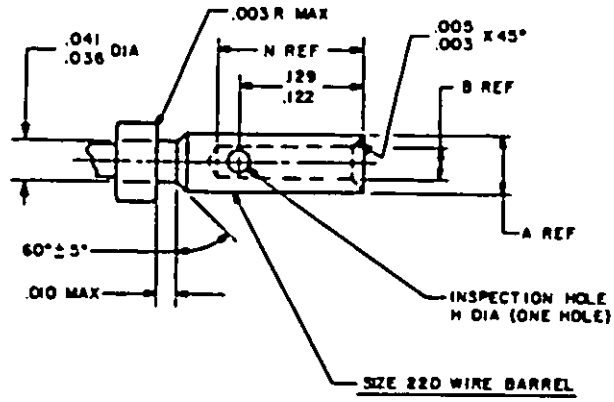
The complete requirements for acquiring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.




Contacts, sizes 20-22D, 16-22, 16-20, 14-16 and 12-12.

FSC 5935

(F) Denotes change

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:29Z
Check the source to verify that this is the current version before use.

TABLE I. *Dimensions.*

| Bin Code | A DIA | B DIA | C DIA | E DIA | G DIA | H DIA | L (REF) | M | N | X | Y RAD | Z |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 100 | .051<br>.048 | .037<br>.035 | .103<br>.100 | .063<br>.061 | .046<br>.042 | .022<br>.018 | .418 | .215<br>.211 | .186<br>.157 | .033<br>.029 | .025<br>.015 | .063<br>.057 |
| 101 | .078<br>.076 | .050<br>.048 | .103<br>.100 | .063<br>.061 | .064<br>.060 | .032<br>.026 | .418 | .215<br>.211 | .186<br>.157 | .033<br>.029 | .025<br>.015 | .063<br>.057 |
| 102 | .105<br>.101 | .068<br>.066 | .133<br>.130 | .078<br>.076 | .090<br>.080 | .042<br>.036 | .501 | .298<br>.294 | .281<br>.250 | .048<br>.044 | .035<br>.025 | .079<br>.073 |
| 103 | .153<br>.147 | .102<br>.098 | .190<br>.187 | .095<br>.093 | .125<br>.115 | .042<br>.036 | .501 | .298<br>.294 | .281<br>.250 | .048<br>.044 | .045<br>.035 | .079<br>.073 |
| 507 | .048<br>.046 | .0355<br>.0335 | .062<br>.060 | .041<br>.039 | N/A | .022<br>.018 | .456 | .253<br>.249 | .157<br>.141 | .033<br>.029 | .025<br>.015 | N/A |

| INCH | mm |
|---|---|
| .003 | 0.08 |
| .005 | 0.13 |
| .010 | 0.25 |
| .015 | 0.38 |
| .018 | 0.46 |
| .022 | 0.56 |
| .025 | 0.64 |
| .026 | 0.66 |
| .029 | 0.74 |
| .032 | 0.81 |
| .033 | 0.84 |
| .0335 | 0.85 |
| .035 | 0.89 |
| .0355 | 0.90 |
| .036 | 0.91 |
| .037 | 0.94 |
| .039 | 0.99 |
| .041 | 1.04 |
| .042 | 1.07 |
| .044 | 1.12 |
| .045 | 1.14 |
| .046 | 1.17 |
| .048 | 1.22 |
| .050 | 1.27 |
| .051 | 1.30 |
| .055 | 1.40 |
| .057 | 1.47 |

| INCH | mm |
|---|---|
| .060 | 1.52 |
| .061 | 1.55 |
| .062 | 1.57 |
| .063 | 1.60 |
| .064 | 1.63 |
| .065 | 1.65 |
| .066 | 1.68 |
| .068 | 1.73 |
| .073 | 1.85 |
| .075 | 1.91 |
| .076 | 1.93 |
| .078 | 1.98 |
| .079 | 2.01 |
| .080 | 2.03 |
| .083 | 2.11 |
| .085 | 2.16 |
| .086 | 2.18 |
| .090 | 2.29 |
| .092 | 2.34 |
| .093 | 2.36 |
| .095 | 2.41 |
| .098 | 2.49 |
| .101 | 2.57 |
| .102 | 2.59 |
| .103 | 2.62 |
| .105 | 2.67 |
| .115 | 2.92 |

| INCH | mm |
|---|---|
| .122 | 3.10 |
| .125 | 3.18 |
| .129 | 3.28 |
| .130 | 3.30 |
| .133 | 3.38 |
| .136 | 3.45 |
| .141 | 3.58 |
| .147 | 3.73 |
| .153 | 3.89 |
| .155 | 3.94 |
| .157 | 3.99 |
| .158 | 4.01 |
| .186 | 4.72 |
| .190 | 4.83 |
| .200 | 5.08 |
| .210 | 5.33 |
| .211 | 5.36 |
| .215 | 5.46 |
| .217 | 5.51 |
| .223 | 5.66 |
| .249 | 6.32 |
| .250 | 6.35 |
| .253 | 6.42 |
| .281 | 7.14 |
| .294 | 7.47 |
| .298 | 7.57 |
| .418 | 10.62 |
| .456 | 11.58 |
| .501 | 12.73 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Dimensions shown apply after plating.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

TABLE II. Design Characteristics

| BIN CODE | Color Bands | | | Mating end size | Wire barrel size | Type | Class |
|---|---|---|---|---|---|---|---|
| | 1st | 2nd | 3rd | | | | |
| 100 | Brown | Black | Black | 16 | 22 | A | B |
| 101 | Brown | Black | Brown | 16 | 20 | | |
| 102 1/ | Brown | Black | Red | 14 | 16 | | |
| 103 | Brown | Black | Orange | 12 | 12 | | |
| 507 | Green | Black | Violet | 20 | 22D | | |

1/ 102 shall meet all applicable test requirements for size 16-16 in MIL-C-39029.

TABLE III. Tools (F)

| BIN CODE | BASIC CRIMPING TOOL | POSITIONER | INSTALLING/REMOVAL TOOL |
|---|---|---|---|
| 100 | M22520/2-01 | M22520/2-11 | M81969/14-02 |
| 101 | M22520/1-01 | M22520/1-02 Red | |
| | M22520/2-01 | M22520/2-11 | |
| 102 | M22520/1-01 | M22520/1-02 Blue | M81969/14-03 |
| 103 | M22520/1-01 | M22520/1-02 Yellow | M81969/14-04 |
| 507 | M22520/2-01 | M22520/2-32 | M81969/14-01 or M81969/1-04 or M81969/8-01 or M81969/8-02 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See Figure and Tables I and II.

Tools: See Table III.

(F) QPL Evaluating Activity: Naval Avionics Center, Code D-714, Indianapolis, Indiana 46218.

International Interest: NEPR 57.

Military Part Numbers: See Table IV.

TABLE IV. Military part number.

(F)

| BIN Code | Military part number | SUPERSEDING |
|---|---|---|
| 100 | M39029/1-100 | M39029/1-16-22 |
| 101 | M39029/1-101 | M39029/1-16-20 |
| 102 | M39029/1-102 | M39029/1-14-16 |
| 103 | M39029/1-103 | M39029/1-12-12 |
| 507 | M39029/1-507 | M39029/1-20-22D |

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army -
Navy - OS
Air Force -

Preparing activity:
Navy - AS
(Project No. 5935-3164)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.