
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR PIN, CRIMP REMOVABLE (FOR MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, MIL-C-83723 SERIES I AND III, AND MIL-C-83733 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

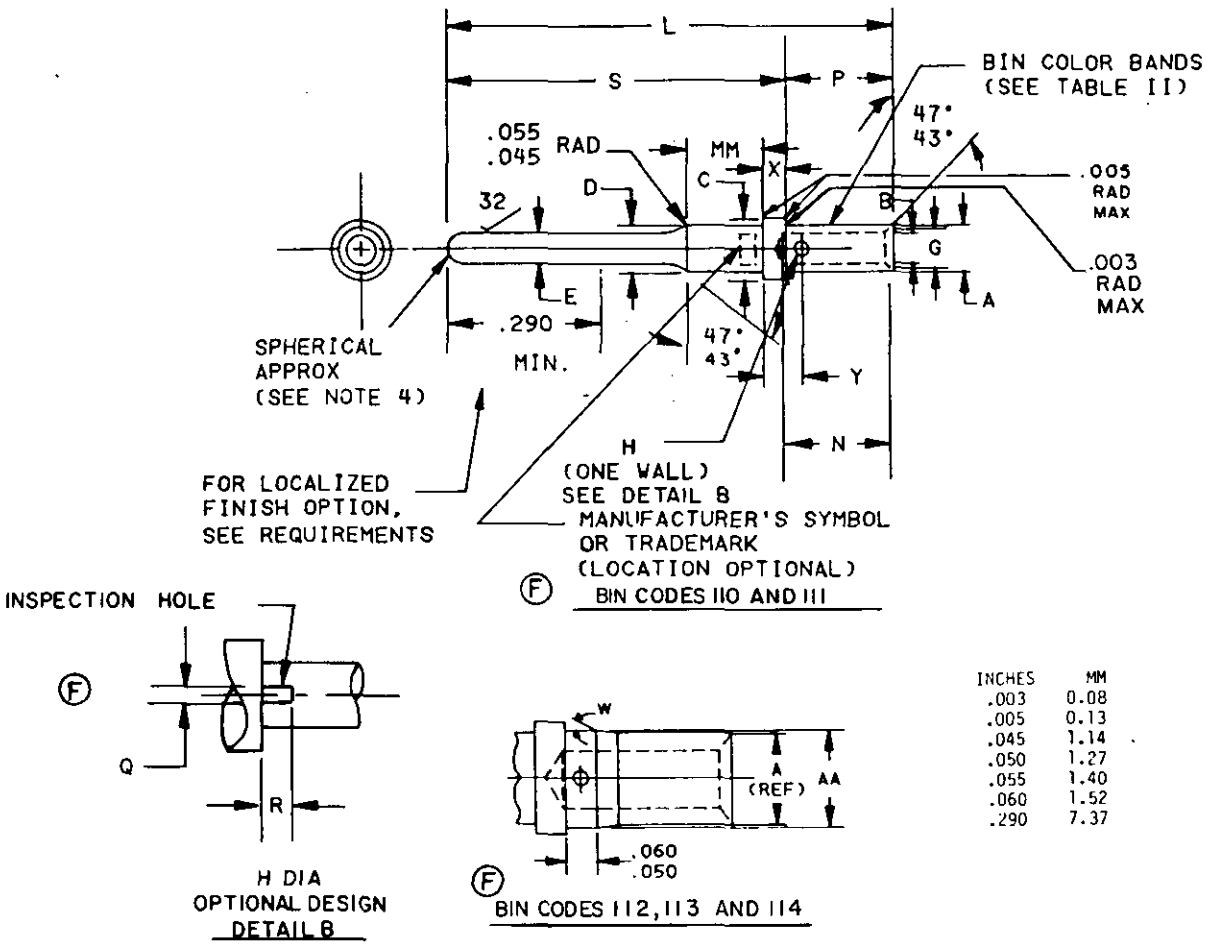

INCHES	MM
.003	0.08
.005	0.13
.045	1.14
.050	1.27
.055	1.40
.060	1.52
.290	7.37

FIGURE 1. Pin contact.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

BIN code	A Dia	B Dia	C Dia	D Dia	E Dia	G Dia (F)	H Dia	L Max (Ref)	N	P	S (F)	W°	X	Y	AA Dia	MM	Weight (Lbs) (Max)	Q (F)	R
110	.078 (1.98) .076 (1.93)	.050 (1.27) .048 (1.22)	.103 (2.62) .100 (2.54)	.078 (1.98) .076 (1.93)	.041 (1.04) .039 (0.99)	.066 (1.68) .056 (1.42)	.032 (0.81) .026 (0.66)	.720 (18.29)	.187 (4.75) .155 (3.94)	.171 (4.34) .160 (4.06)	.549 (13.94) .543 (13.79)	--	.033 (0.84) .029 (0.74)	.068 (1.73) .053 (1.35)	---	.130 (3.30) .125 (3.18)	.0007	.032 .026	.051 .026
111	.103 (2.62) .101 (2.57)	.068 (1.73) .066 (1.68)	.133 (3.38) .130 (3.30)	.103 (2.62) .101 (2.57)	.0635 (1.613) .0615 (1.562)	.092 (2.34) .078 (1.98)	.042 (1.07) .036 (0.91)	.821 (20.85)	.284 (7.21) .250 (6.35)	.257 (6.53) .246 (6.25)	.564 (14.33) .558 (14.17)	--	.048 (1.22) .044 (1.12)	.085 (2.16) .068 (1.73)	---	.130 (3.30) .125 (3.18)	.0013	---	---
112	.078 (1.98) .076 (1.93)	.050 (1.27) .048 (2.33)	.133 (3.38) .130 (3.30)	.103 (2.62) .101 (2.57)	.0635 (1.613) .0615 (1.562)	.066 (1.68) .056 (1.42)	.042 (1.07) .036 (0.91)	.821 (20.85)	.284 (.721) .250 (6.35)	.257 (6.53) .246 (6.25)	.564 (14.33) .558 (14.17)	46 44	.048 (1.22) .044 (1.12)	.085 (2.16) .068 (1.73)	.103 (2.62) .101 (2.57)	.130 (3.30) .125 (3.18)	---	---	---
113	.151 (3.84) .148 (3.76)	.102 (2.59) .098 (2.49)	.190 (4.83) .187 (4.75)	.151 (3.84) .148 (3.76)	.095 (2.41) .093 (2.36)	.136 (3.45) .116 (2.95)	.042 (1.07) .036 (0.91)	.821 (20.85)	.284 (7.21) .250 (6.35)	.257 (6.53) .246 (0.91)	.564 (14.33) .558 (14.17)	16 14	.048 (1.22) .044 (1.12)	.085 (2.16) .068 (1.73)	.158 (4.01) .155 (3.94)	.120 (3.05) .115 (3.94)	.0028	---	---
114	.103 (2.62) .101 (2.57)	.068 (1.73) .066 (1.68)	.190 (4.83) .187 (4.75)	.151 (2.41) .148 (3.76)	.095 (2.42) .093 (2.36)	.092 (2.84) .078 (1.98)	.042 (1.07) .036 (0.91)	.821 (20.85)	.284 (7.21) .250 (6.35)	.257 (6.53) .246 (6.25)	.564 (14.33) .558 (14.17)	46 44	.048 (1.22) .044 (1.12)	.085 (2.16) .068 (1.73)	.158 (4.01) .155 (3.94)	.120 (3.05) .115 (2.92)	---	---	---

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Spherical end dimension shall conform to MIL-C-39029.

FIGURE 1. Pin contact (continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

Bin code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
110	Brown	Brown	Black	20	20	A	B
111	Brown	Brown	Brown	16	16		
112	Brown	Brown	Red	16	20		
113	Brown	Brown	Orange	12	12		
114	Brown	Brown	Yellow	12	16		

TABLE III. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool	
				Wired contact	Unwired contact
110	M22520/1-01, M22520/2-01 or M22520/7-01	M22520/1-02 Red, M22520/2-02 or M22520/7-02	M81969/14-02	M89169/14-02	M81969/30-05
111	M22520/1-01 or M22520/7-01	M22520/1-02 Blue or M22520/7-03	M81969/14-03	M89169/14-03	M89169/30-06
112	M22520/1-01 or M22520/7-01	M22520/1-02 Blue or M22520/7-03	M81969/14-02	M81969/14-02	M81969/30-05
113	M22520/1-01	M22520/1-02 Yellow	M81969/14-04	M81969/14-04	M81969/30-07
114	M22520/1-01	M22520/1-02 Yellow	M81969/14-03	M81969/14-03	M81969/30-06

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics and configuration: See figure and tables I and II.

Tools: See table III.

Mating contact: MIL-C-39029/5.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition D, except the pulse shall be an approximate half-sine wave of 300 G ±15 percent magnitude with a duration of 3 milliseconds ±1. One shock shall be exerted in each of three mutually perpendicular directions.

Localized finish option: Applicable. Contacts shall be finished as specified in the localized finish requirements of MIL-C-39029. The 0.290 inch minimum length requirement in the figure is the "E" length of the area "Y" specified in MIL-C-39029. Nickel underplate is required.

Porosity test, localized finish. If localized finish is used, porosity shall be tested in accordance with method 1017 of MIL-STD-1344. Immersion in nitric acid is not applicable.

QPL evaluating activity: Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, IN 46218.

International interest: NEPR 57.

Military part numbers: See table IV.

TABLE IV. Military part number.

BIN code	Military part number	Supersedes
110	M39029/4-110	M39029/4-20-20 M39029/4-001 M83723/33B20
111	M39029/4-111	M39029/4-16-16 M39029/4-002 M83723/33B16
112	M39029/4-112	M39029/4-16-20 M39029/4-003
113	M39029/4-113	M39029/4-12-12 M39029/4-004 M83723/33B12
114	M39029/4-114	M39029/4-12-16 M39029/4-005

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 99
DLA - ES

User activities:
Navy - OS
Air Force - 80

Preparing activity:
Navy - AS
(Project 5935-3588-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.