MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR SOCKET, CRIMP REMOVABLE (FOR MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, MIL-C-83723 SERIES I AND III, AND MIL-C-83733 CONNECTORS AND MIL-S-12883/40 AND /41 RELAY SOCKETS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

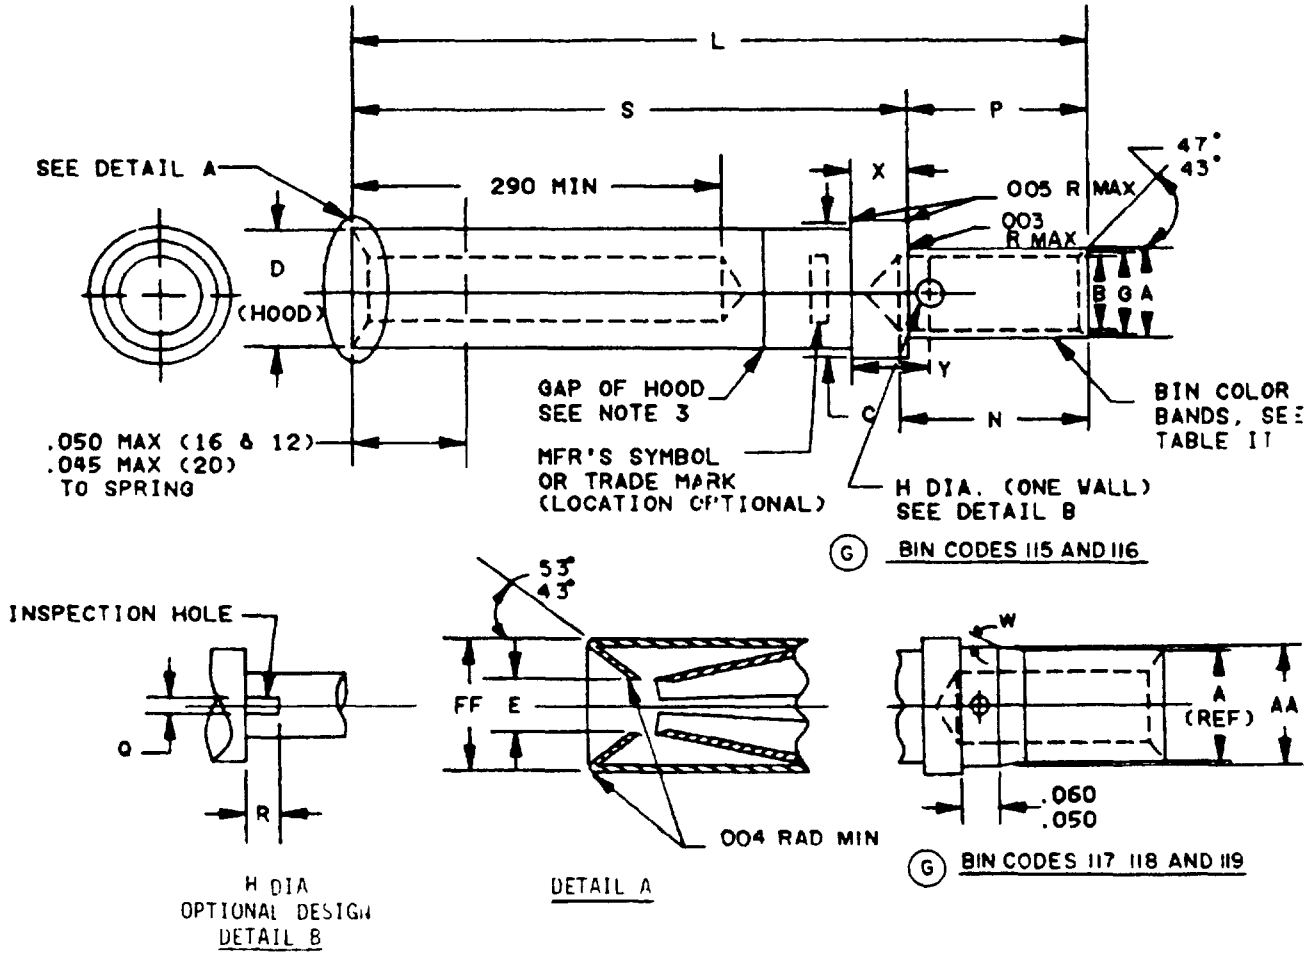


FIGURE 1. Socket contact.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

BIN code	A Dia	B Dia	C Dia	D Dia	E Min Dia	G Dia	H Dia	L Max (Ref)	N	P	S	W°	X	Y	AA	FF Min Dia	Weight (Lbs) Min	Q	R
115	.078 .076	.050 048	.103 .100	.078 .076	.0415	.066 .056	.032 .026	.675	.187 .155	.171 .160	.485 .479	--	.033 .029	.068 .053	---	.060	.0007	.032 .026	.051 026
116	.103 .101	.068 .066	.133 .130	.113 .110	.064	.092 .078	.042 .036	.759	.284 .250	.257 .246	.500 .494	--	.048 .044	.085 .068	---	.087	.0014	---	---
117	.078 .076	.050 .048	.133 .130	.113 .110	.064	.066 .056	.042 .036	.759	.284 .250	.257 .246	.500 .494	46 44	.048 .044	.085 .068	.103 .101	.087	---	---	---
118	.151 .148	.102 098	.190 .187	.161 .158	.0955	.136 .116	.042 .036	.759	284 .250	.257 .246	.500 .494	16 14	.048 .044	.085 .068	.158 .155	.125	.0028	---	---
119	.103 .101	.068 .066	.190 .187	.161 .158	.0955	.092 .078	.042 .036	.759	.284 .250	.257 .246	.500 .494	46 44	.048 .044	.085 .068	.158 .155	.125	---	---	---

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.056	1.42	.102	2.59	.161	4.09
.004	0.10	.060	1.52	.103	2 62	.171	4.34
.005	0.13	.064	1.62	.110	2.79	.187	4.75
026	0.66	.066	1.68	.113	2.87	.190	4.83
.029	0.74	.068	1.73	.116	2.94	.246	6.25
032	0.81	076	1.93	.125	3.18	.250	6.35
.033	0.84	078	1.98	.130	3.30	.257	6.53
.036	0.91	.085	2.16	.133	3 38	.284	7.21
.0415	1.054	087	2.21	.136	3 45	.290	7.34
.042	1 07	.092	2.34	.148	3 76	.485	12.32
.044	1.12	.0955	2.426	.151	3.83	.494	12.55
048	1.22	.098	2.49	.155	3.94	.500	12.70
.050	1.27	.100	2.54	.158	4.01	.656	16.66
051	1.29	.101	2.56	.160	4 06	.759	19.28
.053	1.35						

NOTES.

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Maximum gap of 010 (2.56 mm) inch between hood and body of the contact.

FIGURE 1. Socket contact (continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

Bin code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
115	Brown	Brown	Green	20	20	A	B
116	Brown	Brown	Blue	16	16		
117	Brown	Brown	Violet	16	20		
118	Brown	Brown	Gray	12	12		
119	Brown	Brown	White	12	16		

TABLE III. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool	
				Wired contact	Unwired contact
115	M22520/2-01, M22520/1-01 or M22520/7-01	M22520/2-02, M22520/1-02 Red or M22520/7-02	M81969/8-05 M81969/14-02	M89169/8-06 M81969/14-02	M81969/30-05
116	M22520/1-01 or M22520/7-01	M22520/1-02 Blue or M22520/7-03	M81969/8-07 M81969/14-03	M89169/8-08 M81969/14-03	M89169/30-06
117	M22520/7-01 or M22520/1-01	M22520/1-02 Blue or M22520/7-03	M81969/8-05 M81969/14-02	M81969/8-06 M81969/14-02	M81969/30--05
118	M22520/1-01	M22520/1-02 Yellow	M81969/8-09 M81969/14-04	M81969/8-10 M81969/14-04	M81969/30-07
119	M22520/1-01	M22520/1-02 Yellow	M81969/8-07 M81969/14-03	M81969/8-08 M81969/14-03	M81969/30-06

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics and configuration: See figure and tables I and II.

Tools: See table III.

Mating contact: MIL-C-39029/4.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition D, except the pulse shall be an approximate half-sine wave of 300 G ±15 percent magnitude with a duration of 3 milliseconds ±1. One shock shall be exerted in each of three mutually perpendicular directions.

Localized finish option: Applicable. Contacts shall be finished as specified in the localized finish requirements of MIL-C-39029. The 0.290 inch minimum length requirement in the figure is the "F" length of the area "X" specified in MIL-C-39029 for contacts having separate pressure members. Nickel underplate is required.

Porosity test, localized finish. If localized finish is used, porosity shall be tested in accordance with method 1017 of MIL-STD-1344. Immersion in nitric acid is not applicable.

QPL evaluating activity: Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, IN 46218.

International interest: NEPR 57.

Military part numbers: See table IV.

TABLE IV. Military part number.

BIN code	Military part number	Supersedes
115	M39029/5-115	M39029/5-20-20 M39029/5-001 M83723/34B20
116	M39029/5-116	M39029/5-16-16 M39029/5-002 M83723/34B16
117	M39029/5-117	M39029/5-16-20 M39029/5-003
118	M39029/5-118	M39029/5-12-12 M39029/5-004 M83723/34B12
119	M39029/5-119	M39029/5-12-16 M39029/5-005

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 99
DLA - ES

User activities:
Navy - OS
Air Force - 80

Preparing activity:
Navy - AS
(Project 5935-3588-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering and Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733-5100

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering and Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733-5100

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-C-39029/5G	CONTACTS, ELECTRICAL CONNECTOR SOCKET, CRIMP REMOVABLE (FOR MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3...SOCKETS

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(FOLD ALONG THIS LINE, CUT ALONG THIS LINE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:29Z
Check the source to verify that this is the current version before use.