
MIL-C-39029/8B
2 Aug 1976
SUPERSEDING
MIL-C-39029/8A(NAVY)
15 October 1973


MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, SHIELDED, (FOR MIL-C-26482 SERIES 2 AND MIL-C-81703 SERIES 3 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029

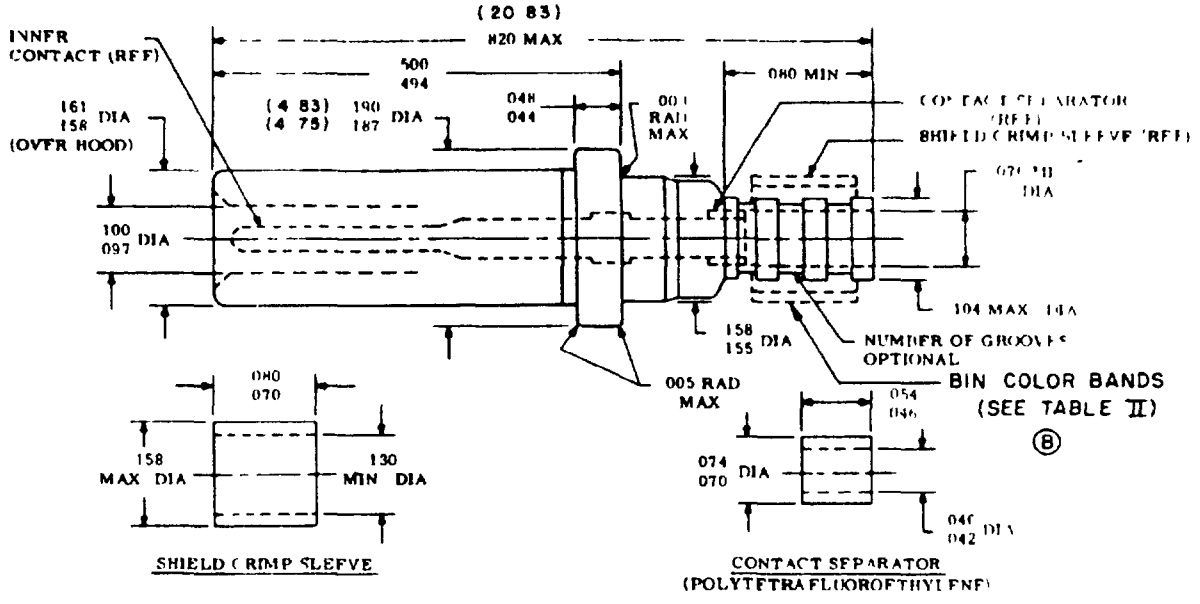

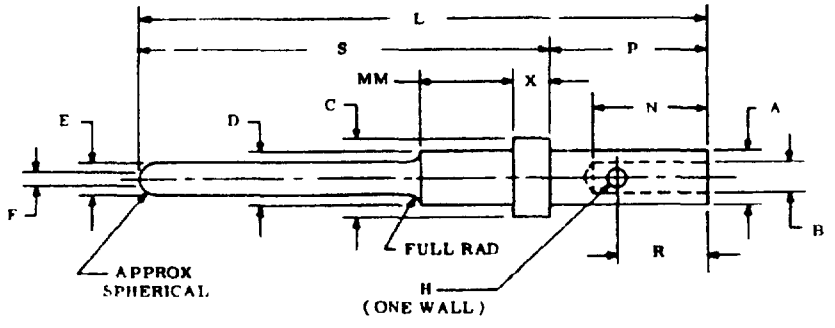

INNER CONTACT (PIN)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

BIN code	A MAX DIA	B DIA	C DIA	D MAX DIA	E DIA	F MAX FLAT DIA	H DIA	L (REF)	N MIN	P	R	S	X	MM
129	.047	.017	.061 .055	.047	.0295 .0280	.019	.022 .016	.708	.155	.222 .202	.155 .140	.506 486	036 033	.164 .147
130	.047	.023	.061 .055	.047	.0295 .0280	.019	.022 .016	.708	.155	.222 .202	.155 140	506 486	.036 033	.164 .147
131	.047	.027	.061 .055	.047	.0295 .0280	.019	022 .016	.708	.155	.222 .202	155 .140	506 .486	036 .033	.164 .147

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

BIN code	Color bands			Contact cavity size	Cables accommodated	Type	Class
	1st	2nd	3rd				
129	Brown	Red	White	12	RG-178 B/U, RG-178 A/U, RG-196 A/U, 30 AWG 28 AWG	D	B
130	Brown	Orange	Black	12	RG-174/U, RG-188 A/U, 26 AWG		
131	Brown	Orange	Brown	12	24 AWG		

REQUIREMENTS

Dimensions, design characteristics, and configuration See figure and tables I and II.

Tools See table III

Mating contact MIL-C-39029/7.

Manufacturer's recommended assembly instruction to be shipped with unit package.

Preparation of samples Contacts shall be wired as required using wire in accordance with table II (cables accommodated column).

Contact resistance
Outer contact - 5 mV at 1 ampere
Inner contact - 10 mV at 1 ampere

Dielectric withstanding voltage
Sea level - 700 Vac, rms
70,000 feet - 200 Vac, rms

Tensile strength
Outer contact - 9 pounds, minimum
Inner contact - 3 pounds, minimum

Insulation resistance 1,000 megohms, minimum

QPL evaluating activity Naval Weapons Support Center, Code 3074, Crane, Indiana 47522

International interest NEPR 57

Military part numbers See table IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

TABLE III. Tools

BIN code	Inner contact		Shield crimp sleeve		Installing tool	Removal tool	
	Basic crimping tool	Positioner	Basic crimping tool	Die		Wired contact	Unwired contact
129	M22520/2-01	M22520/2-27	M22520/5-01	M22520/5-06	MS3447-12	MS3447-12	MS3448-12
130	M22520/2-01	M22520/2-27	M22520/5-01	M22520/5-06	MS3447-12	MS3447-12	MS3448-12
131	M22520/2-01	M22520/2-27	M22520/5-01	M22520/5-06	MS3447-12	MS3447-12	MS3448-12

TABLE IV Military part number.

Bin code	Military part number
129	M39029/8-001
130	M39029/8-002
131	M39029/8-003

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

Custodians
Army - EL
Navy - AS
Air Force - 85

Review activities.
Army - MU, MI
Navy - EC, MC, SH
Air Force - 11, 17, 80
DSA - ES

User activities.
Army -
Navy - OS
Air Force -

Preparing activity
Navy - AS

Agent
DSA - ES

(Project 5935-1977-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.