
MILITARY SPECIFICATION SHEET

Ⓓ JACK, TIP (TEST POINT TYPE, PANEL TYPE; SINGLE TEST POINT (THREADED), LOW VOLTAGE, .080)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-J-39024.

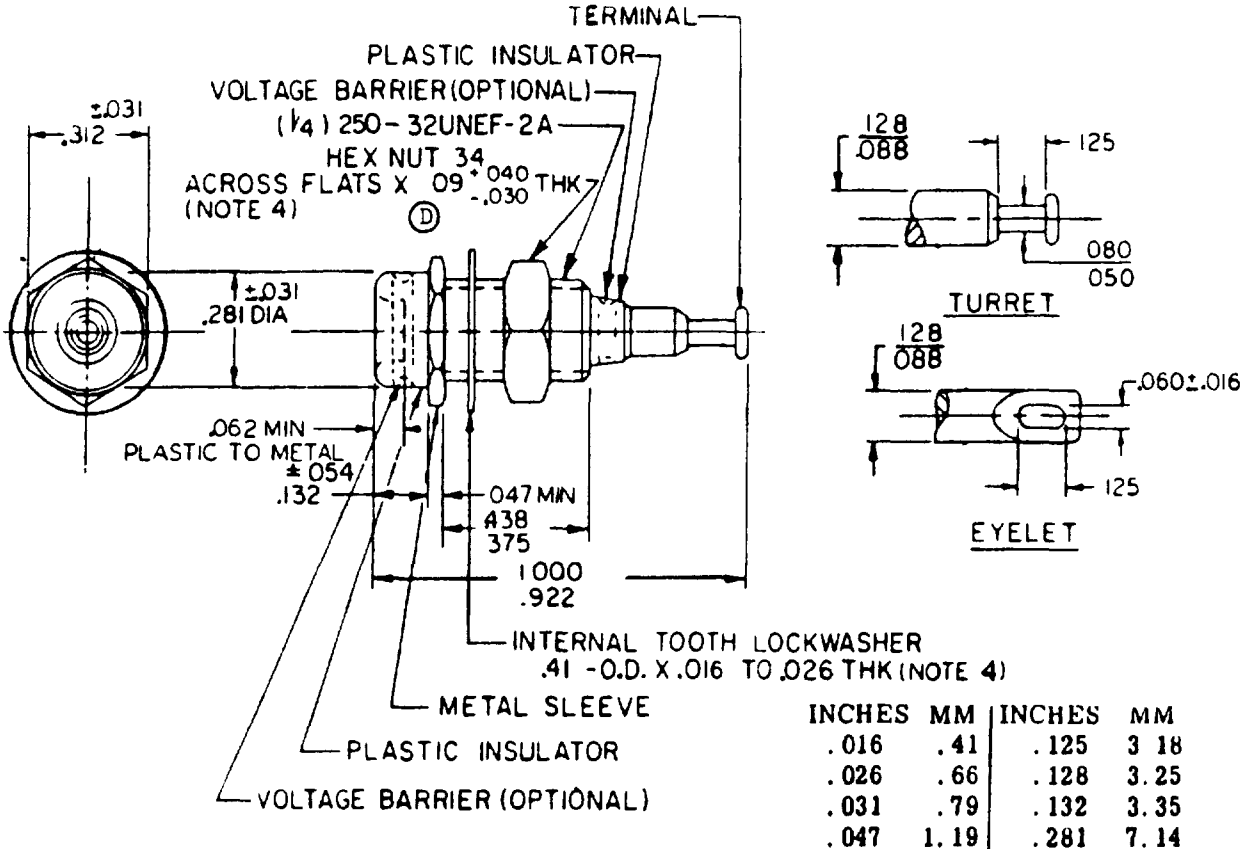

INCHES	MM	INCHES	MM
.016	.41	.125	3 18
.026	.66	.128	3.25
.031	.79	.132	3.35
.047	1.19	.281	7.14
.050	1.27	.312	7.92
.054	1.37	.34	8 64
.060	1.52	.375	9 52
.062	1.57	.41	10.41
.080	2.03	.438	11 12
.088	2.24	.922	23.42
.09	2.29	1.000	25 40

NOTES
1 Dimensions are in inches.
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerances are ± 010 (25 mm) for three place decimals and ± 03 (76 mm) for two place decimals.
4 One hex nut and one washer are to be supplied unassembled

FIGURE 1. Configuration and dimensions

Ⓓ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Supersedes MS16108	Style	Insulation	
			Color	Number per FED-STD-595
-01	-1A, -11A, -12A		White	17875
-02	-2A		Red	11105
-03	-3A		Black	17038
-04	-4A	turret	Brown	10075
-05	-5A		Green	14110
-06	-6A		Orange	12246
-07	-7A		Blue	15123
-08	-8A		Yellow	13655
-09	-9A		Gray	16187
-10	-10A		Purple	27144
-11	-1C, -11C, -12C		White	17875
-12	-2C		Red	11105
-13	-3C		Black	17038
-14	-4C	eyelet	Brown	10075
-15	-5C		Green	14110
-16	-6C		Orange	12246
-17	-7C		Blue	15123
-18	-8C		Yellow	13655
-19	-9C		Gray	16187
-20	-10C		Purple	27144

REQUIREMENTS

Design and construction

Dimensions and configuration: See figure 1 and table I.

Insulation: Material shall be polyamide per L-P-410 or MIL-M-20693.

Terminals: Shall be capable of being wired with two type E-20 wires per MIL-W-16878/4.

Test probe: 0.080 ±0.001 inch in diameter and 1/2-inch (min) length

Contact current rating: 5 amperes (max).

Contact resistance: A test probe in accordance with MIL-C-39024 shall be fully inserted into the connector

Test current: 5 amperes.

Points of measurement: Between the connector terminal and the extreme end of the solder cup on the test probe

Measured values: See table II

Dielectric withstanding voltage (at sea level)

Test voltage: 3,000 volts rms, 60 hertz, shall be applied to insulating material for a period of 15 seconds

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

Insertion and withdrawal forces:

Insertion force 5.0 pounds (max).

Withdrawal force 0.4 pounds (min).

Durability One thousand insertion-withdrawal cycles shall be performed. After the tests, connectors shall meet the initial measurements of insertion and withdrawal force, and contact resistance in table II.

Ⓓ TABLE II. Contact resistance.

Test	Voltage drop (max)
Initial	6 mV
After durability	8 mV
After vibration	10 mV
After salt spray (corrosion)	15 mV

OPERATING NOTE

1. Operating voltage is 2,000 volts rms, 60 hertz at sea level; and 350 volts rms, 60 hertz at 80,000 feet.

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - ME, [illegible]
Air Force - 11, 17
DLA - ES

User activities
Army - MI, [illegible]
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19

Agent
DLA - ES

Preparing activity
Navy - EC

(Project 5935-3371-?)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-J-39024/10D	Jack,Tip (Test Point Type, Panel Type; Single Test Point (Threaded), Low Voltage, .080)

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.