
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE, SINGLE TEST POINT (RIGHT ANGLE, 2-LEG MOUNTING), LOW VOLTAGE, .080

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-39024

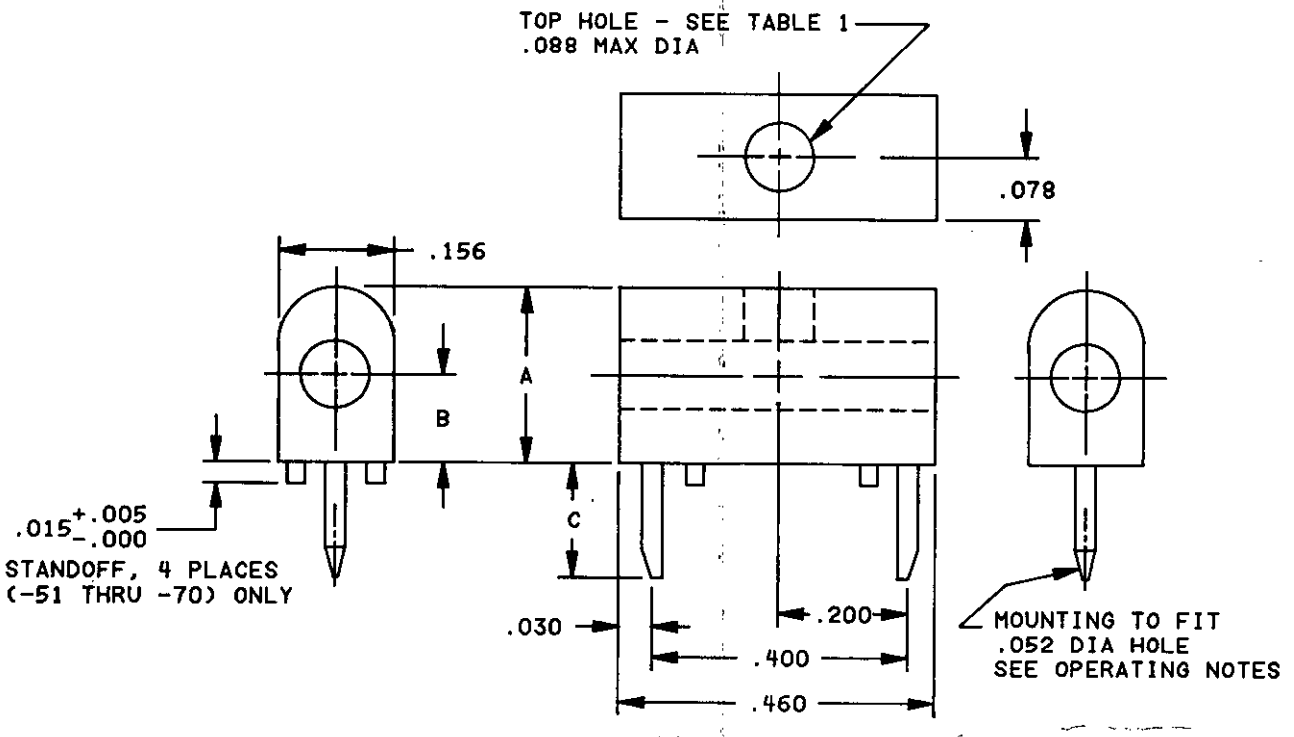

INCHES	MM
.005	0.13
.015	0.38
.030	0.76
.052	1.32
.078	1.98
.088	2.24
.156	3.96
.200	5.08
.400	10.16
.460	11.68

NOTES:
1. Dimensions are in inches. (See table I for dimensions not shown on figure).
2. Unless otherwise specified, tolerance is ±.010.
3. Metric equivalents are given for general information only.
4. Terminal contour is optional provided that mounting hole and mounting center requirements are met.
5. Top hole provides access to the electrical contact for a hand held probe. There is no spring contact retention.
6. Dash-01 thru dash-50 are without standoffs, dash-51 thru dash-70 are with standoffs.
7. Dash-51 thru dash-70 will have a totally enclosed body except for the probe holes.

(E) FIGURE 1. Dimensions and configuration.

(E) denotes change

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Dash number 2/	Dimensions (in inches 1/)			Insulation		Hole configuration	Remarks
	A max.	B±.015	C	Color	Number per FED-STD-595		
-01				White	17875		
-02				Red	11105		
-03				Black	17032		
-04	0.220	0.130	0.130	Brown	10075	Side hole	
-05	(5.59)	(3.30)	(3.30)	Green	14110	only	
-06				Orange	12246		
-07				Blue	15123		
-08				Yellow	13655		
-09				Gray	16187		
-10				Purple	27144		
-41				White	17875		
-42				Red	11105		
-43				Black	17038		
-44				Brown	10075	Top and	
-45	0.220	0.130	0.130	Green	14110	side holes	
-46	(5.59)	(3.30)	(3.30)	Orange	12246		
-47				Blue	15123		
-48				Yellow	13655		
-49				Gray	16187		
-50				Purple	27144		
-51				White	17875		
-52				Red	11105		
-53				Black	17038		
-54				Brown	10075		
-55				Green	14110		
-56	0.220	0.130	0.156	Orange	12246	Side hole	Standoff
-57	(5.59)	(3.30)	(3.96)	Blue	15123	only	required
-58			Min.	Yellow	13655		
-59				Gray	16187		
-60				Purple	27144		
-61				White	17875		
-62				Red	11105		
-63				Black	17038		
-64	0.220	0.130	0.156	Brown	10075		
-65	(5.59)	(3.30)	(3.96)	Green	14110	Top and	Standoff
-66			Min.	Orange	12246	side holes	required
-67				Blue	15123		
-68				Yellow	13655		
-69				Gray	16187		
-70				Purple	27144		

1/ Metric equivalents are shown in parentheses.
2/ Dash numbers -21 through -30 have been deleted. See table II for recommended substitute.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Insulation: Material shall be polyamide per L-P-410 or MIL-M-20693.

Test probe: 0.080 ±0.001 inch in diameter (connector shall accept test probe from either end).

Insulation resistance: Test circuit figure in MIL-C-39024 shall be used.

Dielectric withstanding voltage (at sea level): Test curcuit figure in MIL-C-39024 shall be used.

The applicable voltage shall be applied for 15 seconds.

For -01 through -10, 2,000 volts rms, 60 Hz; -41 through -50, 500 volts rms, 60 Hz; -51 through -60, 2,000 volts rms, 60 Hz; and -61 through -70, 500 volts rms, 60 Hz.

Insertion and withdrawal forces:

Insertion force: 5.0 pounds (maximum).

Withdrawal force: 0.5 pound (minimum).

Identification marking:

The marking shall be located on the immediate container.

Part number: M39024/11- (dash number from table I).

OPERATING NOTES:

Operating voltage is 1,500 volts rms, 60 hertz at sea level; and 350 volts rms, 60 hertz at 50,000 feet.

Maximum thickness of unsupported printed wiring board on which the connector may be used is .0625. Maximum thickness of printed wiring board with plated through hole is .0930.

TABLE II. Substitution data.

Deleted dash numbers	Recommended substitute (dash numbers)
-21	-01
-22	-02
-23	-03
-24	-04
-25	-05
-26	-06
-27	-07
-28	-08
-29	-09
-30	-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, CG, MC, YD
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3440)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.