
MILITARY SPECIFICATION SHEET

JACK, TIP, TEST POINT TYPE, PRINTED WIRING TYPE, SINGLE TEST POINT, RIGHT ANGLE, 2-LEG MOUNTING, LOW VOLTAGE, 080

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-J-39024

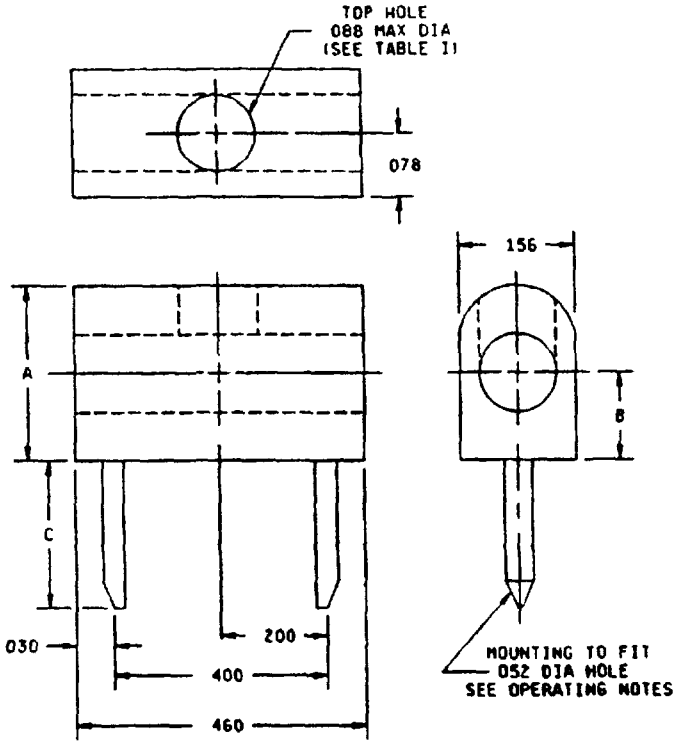

NOTES

1. Dimensions are in inches. (See table I for dimensions not shown on figure 1)
2. Unless otherwise specified, tolerance is ± 010 (0.25 mm)
3. Metric equivalents are given for general information only
4. Terminal contour is optional provided that mounting hole and mounting center requirements are met Also, see Terminal bendability requirements
5. Top hole provides access to the electrical contact for a hand held probe There is no spring contact retention

Inches	mm	Inches	mm
.030	0.76	.156	3 96
.052	1.32	.200	5.08
.078	1.98	.400	10.16
.088	2.24	460	11 68

FIGURE 1 Dimensions and Configuration

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

TABLE I Dash numbers and dimensions

Dash number 2/ 3/	Dimensions (in inches 1/)			Insulation		Hole configuration
	A max	B ± 015	C	Color	Number per FED-STD-595	
-01X 4/				White	17875	
-02X				Red	11105	
-03X				Black	17032	
-04X	220	130	.130	Brown	10075	Side holes
-05X	(5 59)	(3.30)	(3 30)	Green	14110	only
-06X				Orange	12246	
-07X				Blue	15123	
-08X				Yellow	13655	
-09X				Gray	16187	
-10X				Purple	27144	
-41X				White	17875	
-42X				Red	11105	
-43X				Black	17038	
-44X				Brown	10075	
-45X	220	130	130	Green	14110	Top and
-46X	(5 59)	(3 30)	(3.30)	Orange	12246	side holes
-47X				Blue	15123	
-48X				Yellow	13655	
-49X				Gray	16187	
-50X				Purple	27144	
-71X 5/				White	17875	
-72X				Red	11105	
-73X				Black	17038	
-74X	220	.130	130	Brown	10075	Side holes
-75X	(5 59)	(3.30)	(3.30)	Green	14110	only
-76X				Orange	12246	
-77X				Blue	15123	
-78X				Yellow	13655	
-79X				Gray	16187	
-80X				Purple	27144	

1/ Metric equivalents are shown in parentheses.
2/ Dash numbers -21 through -30 have been deleted. See table II for recommended substitute Dash numbers -51 through -70 have been canceled without replacement
3/ X = G (for parts with gold plated terminals)
X = blank for part with solder coated or tin-lead plated terminals
4/ Dash numbers -01X through -10X are for use by OEM's When a Qualified Products List source is available for dash numbers -71X through -80X, only they will be acquired by the government for stock and issue in place of dash numbers -01X through -10X, respectively
5/ Clinchable terminals See terminal bendability requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1 and table I

Insulation Material shall be polyamide per L-P-410 or ASTM D4066

Test probe .080 ± .001 inch (2.03 ± 0.03 mm) in diameter (connector shall accept test probe from either end)

Insulation resistance Test circuit figure in MIL-J-39024 shall be used

Dielectric withstanding voltage (at sea level) Test circuit figure in MIL-J-39024 shall be used

The applicable voltage shall be applied for 15 seconds

For -01X through -10X, 2,000 volts rms, 60 Hz, -41X through -50X, 500 volts rms, 60 Hz, -71X through -80X, 2,000 volts rms, 60 Hz

Insertion and withdrawal forces

Insertion force 5.0 pounds (maximum)

Withdrawal force 0.5 pound (minimum)

Terminal bendability For -71X through -80X, when the part is seated on a .0625 inch (1.588 mm) nominal thickness printed wiring board there shall be no breakage or visible fracture of the terminals when they are clinched parallel to the board surface

Identification marking

The marking shall be located on the immediate container

Part or Identifing Number (PIN) M39024/11- (dash number from table I) G on parts furnished to the government The suffix "G" shall be used to identify parts with gold plated terminals OEM's may order parts without gold plated terminals Effective date of this revision, all parts furnished to the government for stock and issue shall have gold plated terminals Existing government stocks of nongold terminals items shall be issued until exhausted. However, only "G" suffix items will be purchased "G" suffix may be added to existing M39024/11-XX PIN's lacking "G" suffix New NSN's will not be assigned

OPERATING NOTES.

Operating voltage is 1,500 volts rms, 60 hertz at sea level, and 350 volts rms, 60 hertz at 50,000 feet

Maximum thickness of unsupported printed wiring board on which the connector may be used is .0625 inch (1.588 mm) Maximum thickness of printed wiring board with plated through hole is .0930 inch (2.352 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.

TABLE II Substitution data

Deleted dash numbers	Recommended substitute (dash numbers)
-21	-01
-22	-02
-23	-03
-24	-04
-25	-05
-26	-06
-27	-07
-28	-08
-29	-09
-30	-10

Revision letters are not used to denote changes due to the extensiveness of the changes

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - ME
Air Force - 11, 99
DLA - ES

User activities
Army - AR, MI
Navy - AS, CG, MC, YD
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5935-3918)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:25Z
Check the source to verify that this is the current version before use.