
MIL-C-39024/12C
8 August 1975
SUPERSEDING
MIL-C-39024/12B
19 April 1974

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE; SINGLE TEST POINT (HOLE MOUNTING, PUSH-FIT), LOW VOLTAGE

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-39024.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

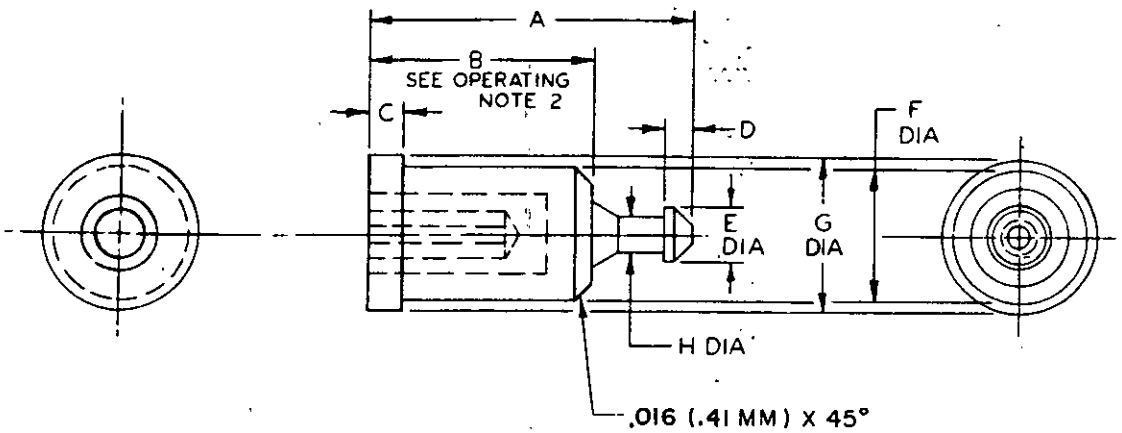

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.010 (.25 mm) on three place decimals and ±3.0° on angle.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

© denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Dimensions 1/ A ±.010 (.25)	B	C	D	E Dia.	F Dia. ±.002 (.05)	G Dia.	H Dia.	Insulation Color	Insulation Number per FED-STD-595
-01	0.453 (11.51)	0.317 (8.05)	0.047 (1.19)	0.037 (.94)	0.074 (1.88)	0.185 (4.70)	0.219 (5.56)	0.054 (1.37)	White	17875
-02									Red	11105
-03									Black	17038
-04									Brown	10075
-05									Green	14110
-06									Orange	12246
-07									Blue	15123
-08									Yellow	13655
-09									Gray	16187
-10									Purple	27144
-11									Natural	---
-12	0.390 (9.91)	0.265 (6.73)	0.046 (1.17)	0.023 (.58)	0.068 (1.73)	0.149 (3.78)	0.172 (4.37)	0.040 (1.02)	White	17875
-13									Red	11105
-14									Black	17038
-15									Brown	10075
-16									Green	14110
-17									Orange	12246
-18									Blue	15123
-19									Yellow	13655
-20									Gray	16187
-21									Purple	27144
-22									Natural	---

1/ Metric equivalents shown in parentheses.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure and table I.

Insulation: Material shall be polytetrafluoroethylene per MIL-P-19468.

Operating temperature: -65°C to +200°C.

Test probe: Connectors shall be ½-inch (minimum) length and accept test probe tips as follows:

Dash nos.	Probe dia (±.001)
-01 thru -11	.080 inch
-12 thru -22	.040 inch

Contact current rating: 5.5 amperes (maximum).

Dielectric withstanding voltage (at sea level):

Test voltage shall be as follows:

Dash nos.	Volts, rm(60 Hz)
-01 thru -11	1,800
-12 thru -22	1,600

Insertion and withdrawal forces:

Insertion force: 5.0 pounds (max).

Withdrawal force: 0.4 pound (min).

Thermal shock: Shall be in accordance with method 107 of MIL-STD-202, condition C.

Identification marking:

Part number: M39024/12-(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

OPERATING NOTES:

1. Operating voltage is as follows:

Dash numbers	At sea level	At 50,000 feet
-01 thru -11	800 volts rms, 60 Hz	450 volts rms, 60 Hz
-12 thru -22	700 volts rms, 60 Hz	450 volts rms, 60 Hz

2. Maximum thickness of panel on which this connector may be used:

Dash numbers	Max. panel thickness
-01 thru -11	0.230 inch
-12 thru -22	0.139 inch

APPLICATION DATA:

(C) *Dash numbers -01 thru -11. Countersink installation side 0.172 ±0.002 inch mounting hole with a 60° countersink to 0.195 $^{+0.005}_{-0.000}$ inch diameter when used with a 0.040 inch or thicker chassis.

*Dash numbers -12 thru -22. Countersink installation side 0.136 ±0.002 inch mounting hole with a 60° countersink to 0.160 $^{+0.005}_{-0.000}$ inch diameter when used with a 0.040 inch or thicker chassis.

*An 82° countersink shall be used with a chassis under 0.040 inch thick.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, ME, SL
Navy -
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - MI, MU, WC
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5935-2016)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.